


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	05/06/02	A.D.M.

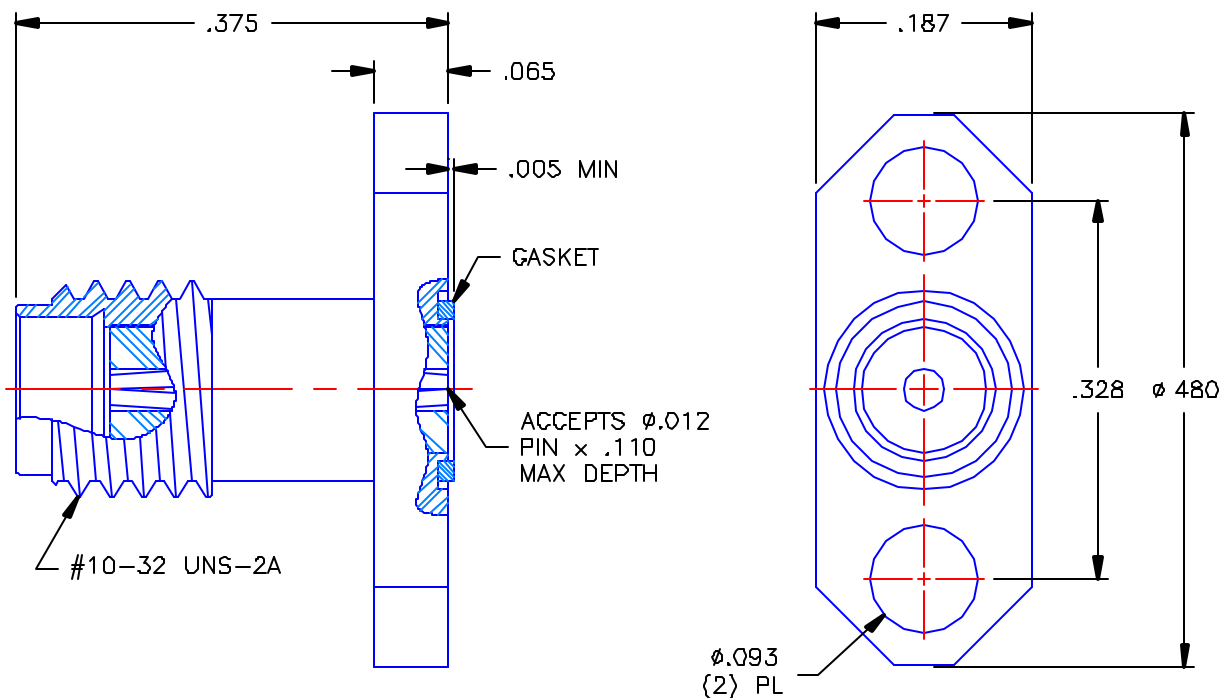

PROPRIETARY INFORMATION
 NOT TO BE RELEASED
 WITHOUT WRITTEN PERMISSION
 FROM AN AUTHORIZED
 REPRESENTATIVE OF
 APPLIED ENGINEERING PRODUCTS

NOTES:

MATERIAL:

1. BODY = STAINLESS STEEL PER ASTM A582, ALLOY 303, CONDITION "A".
2. INSULATOR = VIRGIN WHITE TEFLON PER ASTM D1710, GRADE 1, TYPE I, CLASS "B".
3. CONTACT = BERYLLIUM COPPER PER ASTM B196, ALLOY C17300, TEMPER TD04.
4. GASKET = CONDUCTIVE SILVER/SILICONE ELASTOMERS 70 DUROMETER.


FINISHES:

1. BODY = PASSIVATE PER QQ-P-35, TYPE VI.
2. CONTACT = GOLD PLATE PER MIL-G-45204, TYPE II, CLASS 1, GRADE C, OVER .00010 TO .00020 STRESS FREE SULFAMATE NICKEL PER QQ-N-290.

ROCKWELL P/N: 357-0159-090

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON	
DECIMAL	ANGLE
REFERENCE:	
ORIGINATOR: A.D.M. DATE: 04/11/02	

DWN:	DATE
A.D.M.	04/11/02
CHKD:	DATE
D.N.	05/06/02
APVD:	DATE
D.J.C.	05/06/02
MATERIALS & FINISHES:	
SEE NOTES	

	APPLIED ENGINEERING PRODUCTS 104 John W Murphy Dr. New Haven, CT 06513	
	SSMA STRAIGHT JACK 2 HOLE FLANGE MOUNT HERMETIC SEAL LAUNCHER	
SIZE	FSCM NO.	DWG. NO.
A	19505	9771-9513-001
SCALE	SHEET 1 OF 1	
6:1		

9771-9513-001