
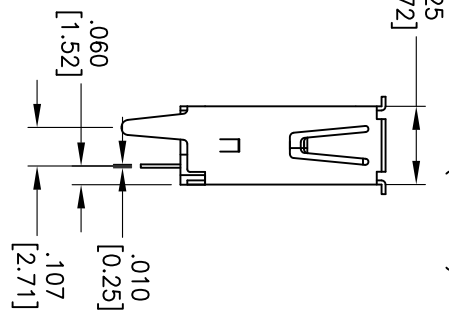
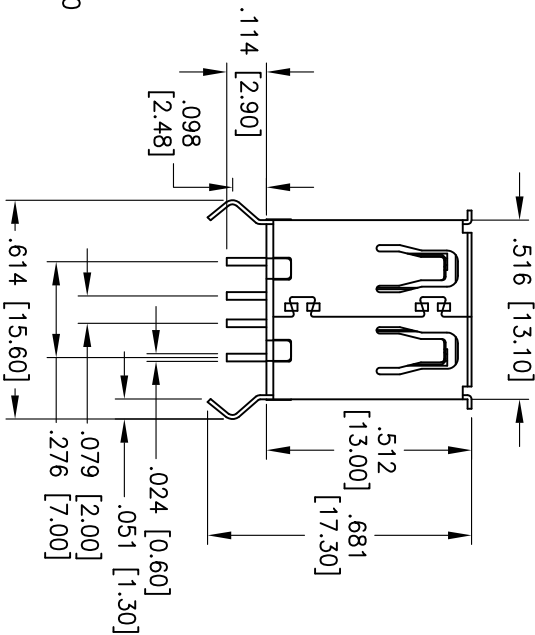
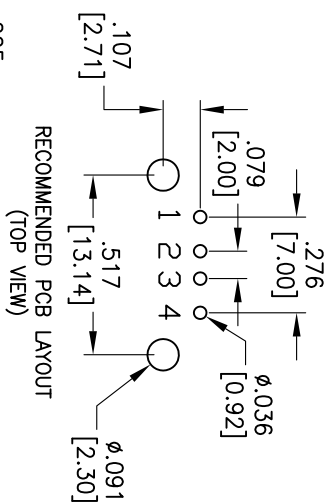


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED FOR NEW TOOLING	4/11/06	
A		REDRAWN	12/13/12	

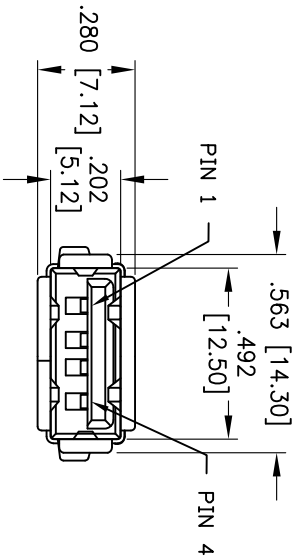

SPECIFICATIONS:

Material:

Insulator: PBT, Glass filled, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Shell: Brass, nickel plated

Plating:

Gold over Nickel underplate on contact area, Tin over Copper underplate on PCB tails

Electrical:

Operating voltage: 30 VAC max.

Current rating: 1.5 Amp max @250V AC.

Contact resistance: 30 mohms max.

Insulation resistance: 1000 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -20°C to +60°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES
X ± .10 ØXX ± .10
.XX ± .020 ØXX ± .015
.XXX ± .015 ØXXX ± .010

ADAM TECH
909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710
TITLE: UNIVERSAL SERIAL BUS, SINGLE PORT,
VERTICAL, PCB

APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	USB-A-S-VTA	A
REF:	S00005C	SCALE: NTS
SHEET	1 OF 1	