


LTR	DESCRIPTION	DATE	BY
-	Released	11/22/03	JCL

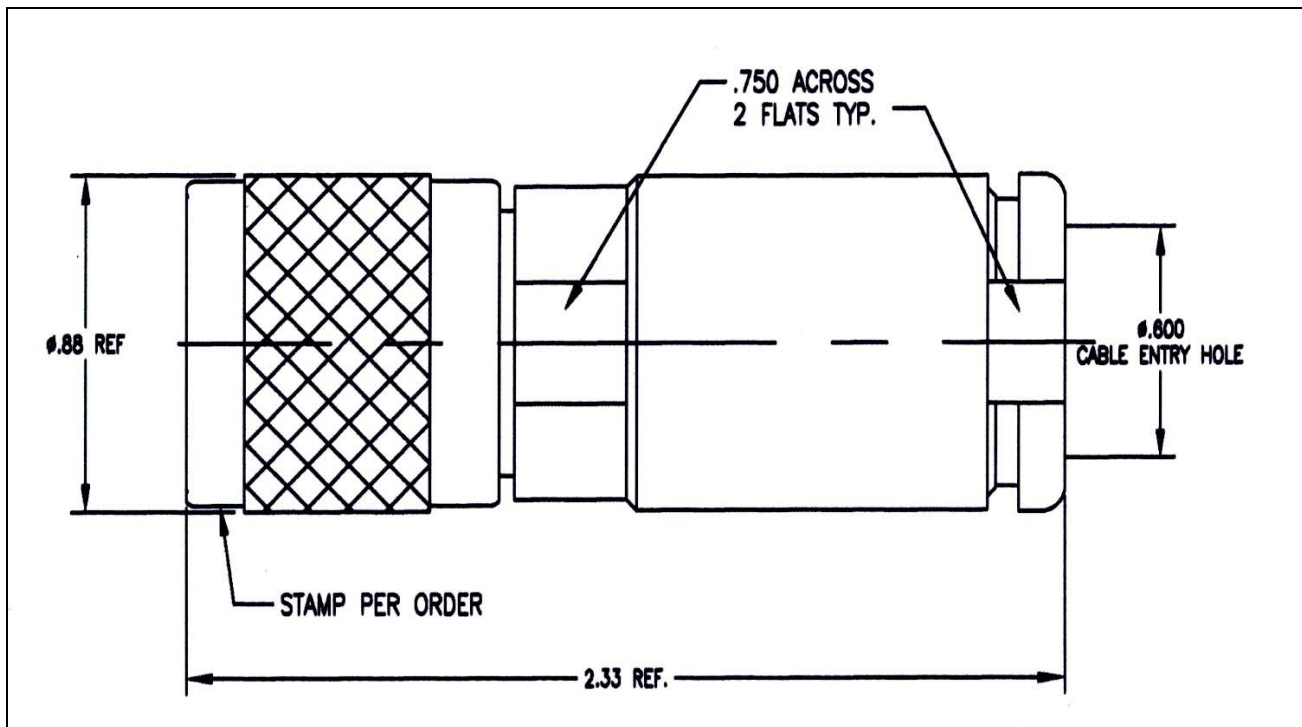

I. MATERIALS & FINISHES

center contact: Silver Plated Brass
 outer contact: Nickel Plated Brass
 body: Nickel Plated Brass
 dielectric: Teflon® PTFE
 gasket: Silicone Rubber
 shrink sleeve: Adhesive Lined Polyolefin
 attachment: braid clamp

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 5000 vrms (max)
 vswr: 1.25:1 (max) up to 1 GHz
 insertion loss: $0.10 \times \sqrt{F_{ghz}}$

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals

Drawn	JCL	11/22/03



TIMES MICROWAVE SYSTEMS

Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-600-HNM

Type-HN male plug
 for LMR-600 Cable

Size A	CAGE CODE 68999	Drawing No.: 3190-1429
--------	--------------------	---------------------------

Scale: NA

Rev. (-)

Sheet: 1 of 1