


Competitively Priced CMOS Oscillators

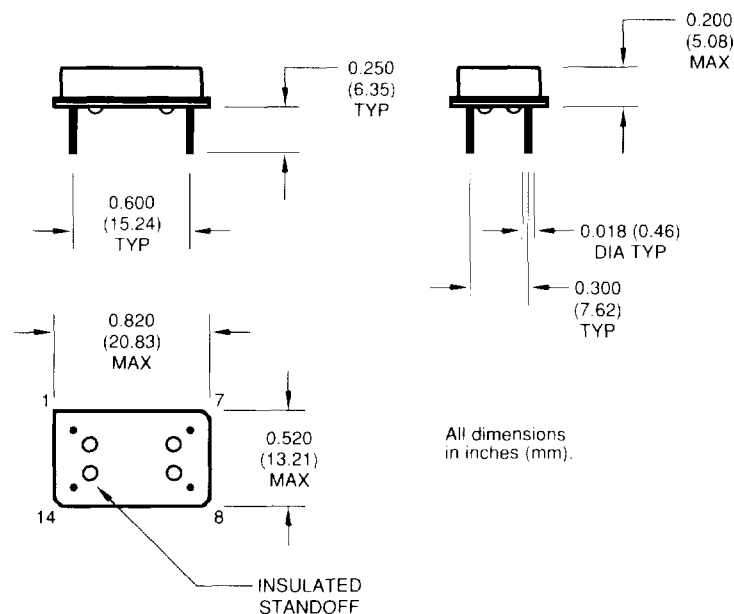

Part Marking and Numbering		MCO	1	3	F	A	D
Product Series		MCO					
Temperature Range		1: 0°C to +70°C 2: -40°C to +85°C 3: -55°C to +105°C 4: -55°C to +125°C 5: -10°C to +85°C 6: -20°C to +70°C 7: 0°C to +85°C					
Stability		1: ± 1000 ppm 2: ± 500 ppm 3: ± 100 ppm 4: ± 50 ppm 5: ± 35 ppm 6: ± 25 ppm 7: ± 0/-200 ppm					
Output Type		F: Fixed D: Dual-(master & divided output) C: Dual Complementary (3.000 to 12.000 MHz)					
Symmetry/Logic Compatibility		A: 40/60 C: 45/55 CMOS					
Package/Lead Configurations		D: DIP, Nickel Header G: Gull Wing, Nickel Header					

Pin Connections

PIN	FUNCTION
1	N/C or optional dual output
7	Circuit/Case Ground
8	Output
14	+V _{dd}

Electrical Specifications

(Standard Operating Conditions 0°C to +70°C)

PARAMETERS	+5 VDC Supply			+15 VDC Supply			UNITS
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	
Frequency Range	0.732 kHz		6.000	0.732 kHz		12.000	MHz
Output Load		15			15		pF ²
Symmetry							
0.732 kHz to 2.990 MHz	40/60	50/50	60/40	40/60	50/50	60/40	%
3.000 to 6.000 MHz	40/60		60/40	40/60		60/40	%
6.010 to 12.000 MHz				40/60		60/40	%
Logic "0" Level		0.2	10% V _{dd}		0.2	10% V _{dd}	V
Logic "1" Level	90% V _{dd}	V _{dd} - 0.2		90% V _{dd}	V _{dd} - 0.2		V
Rise/Fall Time		150			55		ns
Supply Current							
0.732 kHz to 2.990 MHz		3			20		mA
3.000 to 6.000 MHz		2			14		mA
6.010 to 12.000 MHz					20		mA

2- See load circuit #2 on page 32.

Available Stabilities vs Temperature

T \ S	1	2	3	4	5	6	7
1	A	A	S	A	A	A	A
2	A	A	A	A	A	A	A
3	A	A	A	A	N	N	A
4	A	A	A	N	N	N	A
5	A	A	A	A	A	A	A
6	A	A	A	A	A	A	A
7	A	A	A	A	A	A	A

A = AVAILABLE S = STANDARD
N = NOT AVAILABLE

Available Symmetry

FREQ. RANGE	STD.	OPTIONS
up to 3.000 MHz	A	C
3.000 to 12.000 MHz	A	

M-tron reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of such product.