

REMEC

Voltage Controlled Oscillator

RF Band

50 to 100 MHz

Electrical Specifications ⁽¹⁾:

Parameter	Specifications
Frequency Range	50 to 100 MHz
Power Output at 25°C (50 Ohm load)	+10 dBm, min.
Power Output Variation vs. Temperature	2.0 dB, typical
Frequency Drift vs. Temperature ⁽²⁾	2.0 MHz, typical
Frequency Pulling (12 dB Return Loss)	0.5 MHz, typical
Frequency Pushing	0.5 MHz/V, typical
Tuning Voltage Limits	0 to +20 VDC
SSB Phase Noise (50 kHz offset)	-120 dBc/Hz, typical
Harmonics ⁽³⁾	-15 dBc, typical
Spurious	-70 dBc, max.
Bias Voltage ⁽⁴⁾	+15 VDC \pm 1%
Bias Current ⁽⁵⁾	30 mA, typical
Operating Temperature	-55 to +100°C






HV17T-1

HV17SM-12

Notes:

- Specifications guaranteed over the operating temperature range. Those specifications indicated as typical are not guaranteed. Plots exemplify typical performance at +25°C
- Total frequency drift over the full temperature range.
- Worst case harmonics over the frequency range.
- Alternate bias voltages available.
- Lower bias current available.
- Other package available see page 4-45.
- Military screening available.

Typical Performance at 25°C

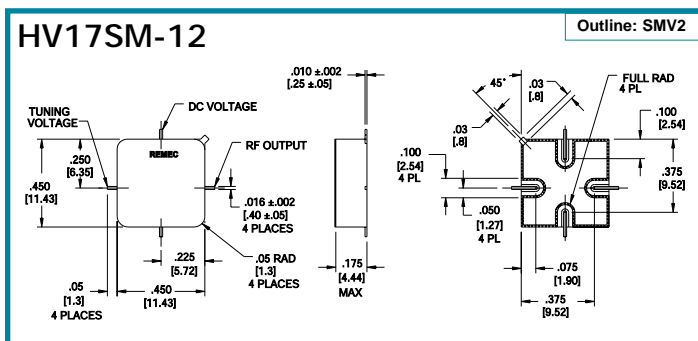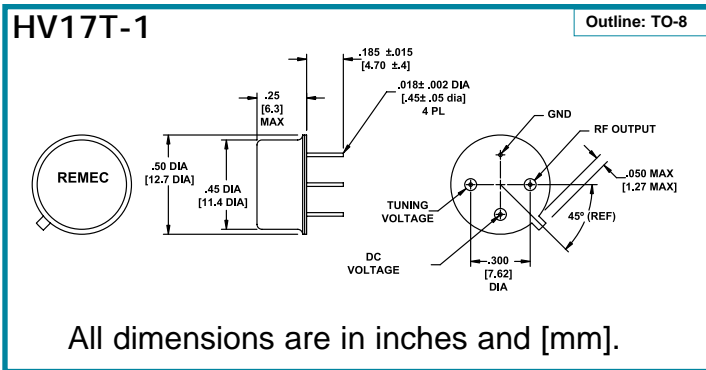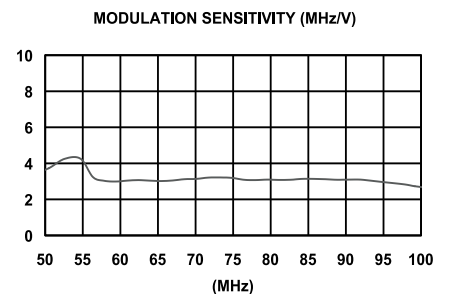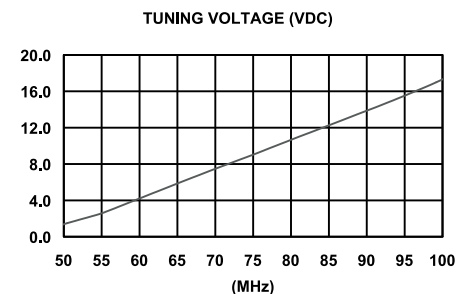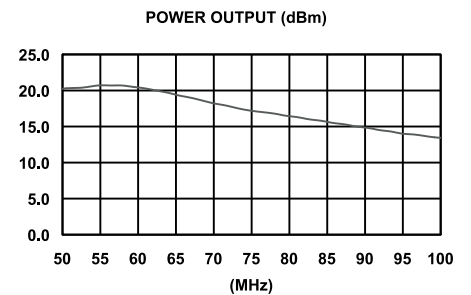

Specifications subject to change without notice.