




Series
NSX

SIZE 1 SOCKET COAX
FOR CABLE RG400
/


Issue:
09 MAY 00

Page
1 / 1


DIELECTRIC

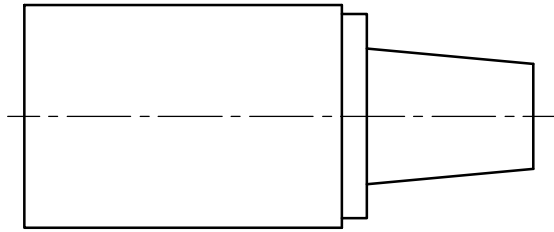


OUTER CONTACT AND RETENTION PLATE
SUB ASSY

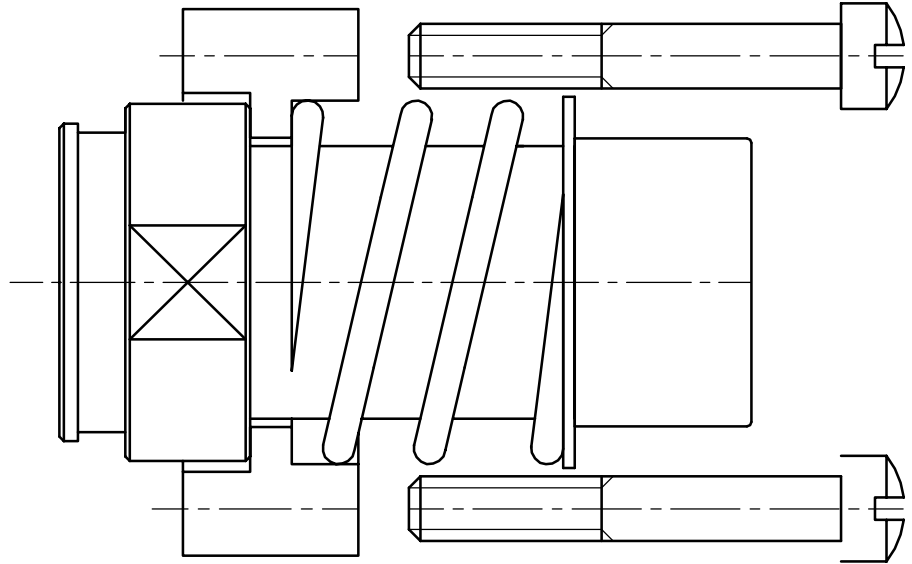


BRAID CLAMP




WASHER



INNER CONTACT




SHRINKABLE SLEEVE

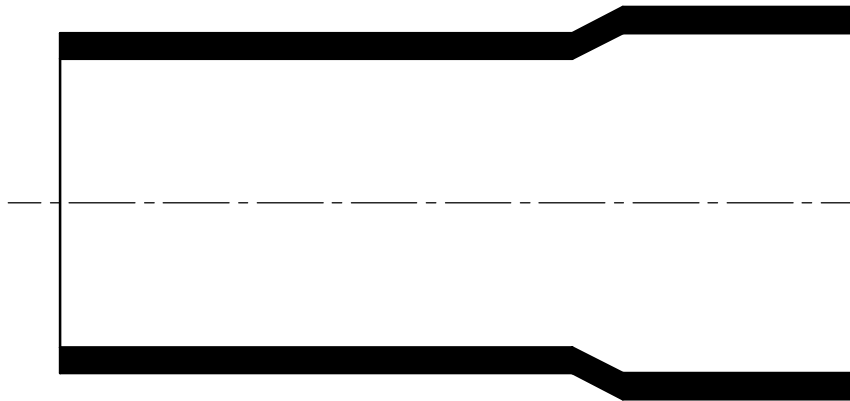

FERRULE



CLAMP NUT

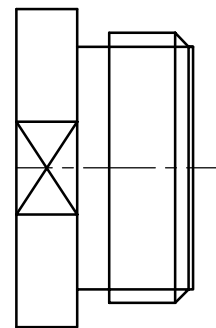

WIRING INSTRUCTION, SEE RP2798

CRIMPING TOOLS :

OUTER CONTACT

TOOL M22520/5-01 (RADIALL 282 293)

DIE M22520/5-05 (RADIALL 282 246) HEX A

INNER CONTACT

TOOL M22520/1-01 (RADIALL 282 291) SELECTOR ON 7

POSITIONNER M22520/1-13 (RADIALL 282 997) RED TURRET

ELECTRICAL CHARACTERISTICS :

IMPEDANCE 50 OHMS

VSWR 1,3 10MHz TO 5GHz

DIELECTRIC WITHSTANDING VOLTAGE 1500V

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary.

4112-9610

CREATION
PEN: /
NOM: HASCOET
DATE: 09 MAY 00
APPR.:
	Issue	Revisions	Name	Approved