

54LVX3383

10-Bit Low Power Bus-Exchange Switch

General Description

The 54LVX3383 provides two sets of high-speed CMOS TTL-compatible bus switches. The low on resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise. The device operates as a 10-bit bus switch or a 5-bit bus exchanger. The bus exchange (BX) signal provides nibble swapping of the AB and CD pairs of signals. This exchange configuration allows byte swapping of buses in systems. It can also be used as a quad 2-to-1 multiplexer and to create low delay barrel shifters. The bus enable (\overline{BE}) signal turns the switches on.


Features

- 5Ω switch connection between two ports
- Minimal propagation delay through the switch
- Ultra low power with $0.2\ \mu\text{A}$ typical I_{CC}
- Zero ground bounce in flow-through mode
- Control inputs compatible with TTL level
- Available in CDIP and Flatpack packages
- Standard Microcircuit Drawing (SMD) 5962-9950601


Ordering Code

Order Number	Package Number	Package Description
54LVX3383J-QML	J24F	24-Lead Ceramic Dual-in-line
54LVX3383W-QML	W24C	24-Lead Cerpack

Logic Diagram

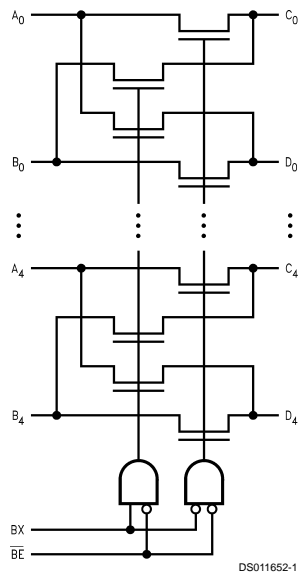

Connection Diagram

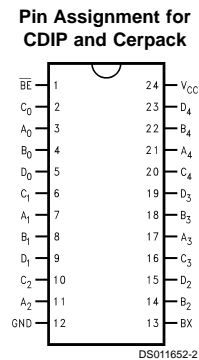

Pin Descriptions

Pin Names		Description		
$\overline{\text{BE}}$		Bus Switch Enable		
BX		Bus Exchange		
$A_0\text{--}A_4, B_0\text{--}B_4$		Buses A, B		
$C_0\text{--}C_4, D_0\text{--}D_4$		Buses C, D		

$\overline{\text{BE}}$	BX	$A_0\text{--}A_4$	$B_0\text{--}B_4$	Function
H	X	High-Z State	High-Z State	Disconnect
L	L	$C_0\text{--}C_4$	$D_0\text{--}D_4$	Connect
L	H	$D_0\text{--}D_4$	$C_0\text{--}C_4$	Exchange

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Supply Voltage (V_{CC})	-0.5V to +7.0V
DC Switch Voltage (V_S)	-0.5V to +7.0V
DC Input Voltage (V_I) (Note 2)	-0.5V to +7.0V
DC Input Diode Current (I_{IN}) with $V_I < 0$	-20 mA
DC Output (I_O) Sink Current	30 mA
Storage Temperature Range (T_{STG})	-65°C to +150°C
Junction Temperature (T_J)	175°C
Power Dissipation	500mW

Recommended Operating Conditions

Supply Voltage (V_{CC})	4.5V to 5.5V
Input Voltage (V_{IN})	0V to 5.5V
Input Rise and Fall Time (t_r, t_f)	
Switch Control Input	0ns/V to 8ns/V
Switch I/O	0ns/V to DC
Free Air Operating Temperature (T_A)	-55°C to +125°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

DC Electrical Characteristics

Symbol	Parameter	V_{CC} (V)	$T_A = -55^\circ\text{C to } +125^\circ\text{C}$		Units	Conditions
			Min	Max		
V_{IK}	Maximum Clamp Diode Voltage	4.5		-1.2	V	$I_{IN} = -18 \text{ mA}$
V_{IH}	Minimum High Level Input Voltage	4.5-5.5	2.0		V	
V_{IL}	Maximum Low Level Input Voltage	4.5-5.5		0.8		
I_{IN}	Maximum Input Leakage Current	0		10	μA	$0 \leq V_{IN} \leq 5.5\text{V}$
		5.5		± 1		
I_{OZ}	Maximum TRI-STATE I/O Leakage	5.5		± 10	μA	$0 \leq A, B \leq V_{CC}$
R_{ON}	Switch On Resistance (Note 3)	4.5		10	Ω	$V_I = 0\text{V}, I_{ON} = 30 \text{ mA}$
				20	Ω	$V_I = 2.4\text{V}, I_{ON} = 15 \text{ mA}$
I_{CC}	Maximum Quiescent Supply Current	5.5		10	μA	$V_I = V_{CC}, \text{GND}$ $I_O = 0$
ΔI_{CC}	Increase in I_{CC} per Input (Note 4)	5.5		2.5	mA	$V_{IN} = 3.15\text{V}, I_O = 0$ Per Control Input

Note 3: Measured by voltage drop between A and B pin at indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 4: Per TTL driven input ($V_{IN} = 3.15\text{V}$, control inputs only). A and B pins do not contribute to I_{CC} .

AC Electrical Characteristics

Symbol	Parameter	V _{CC} (V)	T _A = -55°C to +125°C C _L = 50 pF		Units
			Min	Max	
t _{PLH} , t _{PHL}	Data Propagation Delay A _n to C _n , D _n or B _n to D _n , C _n (Note 6)	4.5-5.5		0.25	ns
t _{PLH} , t _{PHL}	Switch Exchange Time BX to A _n , B _n , C _n , D _n	4.5-5.5	1.5	7.0	ns
t _{PZL} , t _{PZH}	Switch Enable Time BE to A _n , B _n , C _n or D _n	4.5-5.5	1.5	7.0	ns
t _{PLZ} , t _{PHZ}	Switch Disable Time BE to A _n , B _n , C _n , or D _n	4.5-5.5	1.5	7.0	ns


Note 5: All typical values are at V_{CC} = 5.0V, T_A = 25°C.

Note 6: This parameter is guaranteed by design but not tested. The bus switch contributes no propagation delay other than the RC delay of the On resistance of the switch and the load capacitance. The time constant for the switch and alone is of the order of 0.25 ns for 50 pF load. Since this time constant is much smaller than the rise/fall times of typical driving signals, it adds very little propagation delay to the system. Propagation delay of the bus switch when used in a system is determined by the driving circuit on the driving side of the switch and its interaction with the load on the driven side.


Capacitance (Note 7)

Symbol	Parameter	Max	Units	Conditions
C _{IN}	Control Input Capacitance	12	pF	V _{CC} = 5.0V
C _{I/O} (OFF)	Input/Output Capacitance	20	pF	V _{CC} = 5.0V

Note 7: Capacitance is characterized but not tested.

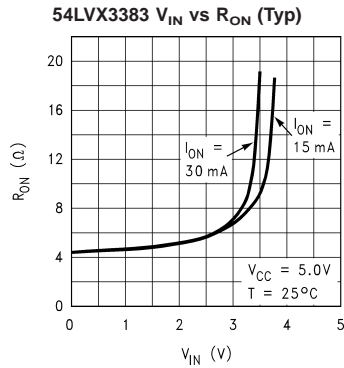


Physical Dimensions inches (millimeters) unless otherwise noted

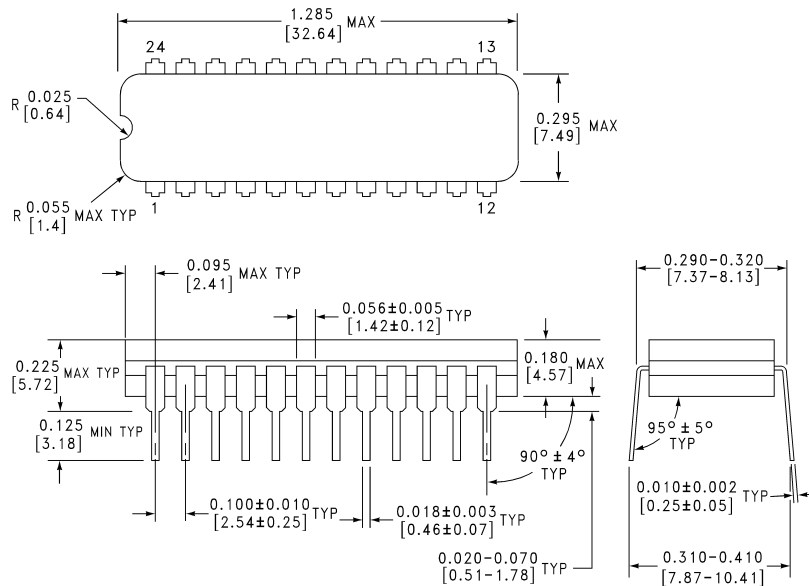

J24F (REV. H)

**24-Lead Ceramic Dual-in-line
Package Number J24F**

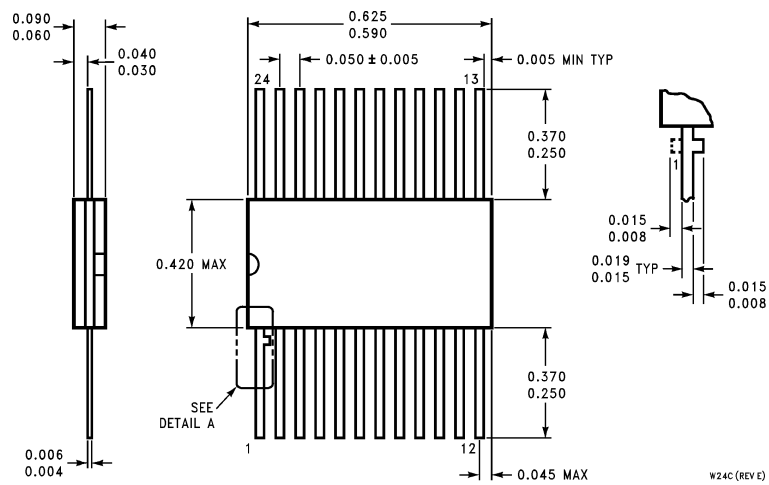

W24C (REV E)

**24-Lead Cerpack
Package Number W24C**

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.




National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507



54LVX3383 10-Bit Low Power Bus Exchange Switch

Contents

- [General Description](#)
- [Features](#)
- [Datasheet](#)
- [Package Availability, Models, Samples & Pricing](#)

General Description

The 54LVX3383 provides two sets of high-speed CMOS TTL-compatible bus switches. The low on resistance of the switch allows inputs to be connected to outputs without adding propagation delay or generating additional ground bounce noise. The device operates as a 10-bit bus switch or a 5-bit bus exchanger. The bus exchange (BX) signal provides nibble swapping of the AB and CD pairs of signals. This exchange configuration allows byte swapping of buses in systems. It can also be used as a quad 2-to-1 multiplexer and to create low delay barrel shifters. The bus enable (BE#) signal turns the switches on.




Features

- 5 Ohm switch connection between two ports
- Minimal propagation delay through the switch
- Ultra low power with 0.2 μ A typical I_{CC}
- Zero ground bounce in flow-through mode
- Control inputs compatible with TTL level

- Available in CDIP and Flatpack packages
- Standard Microcircuit Drawing (SMD) 5962-9950601

Pin Names	Description
	Bus Switch Enable
BX	Bus Exchange
A ₀ -A ₄ , B ₀ -B ₄	Buses A, B
C ₀ -C ₄ , D ₀ -D ₄	Buses C, D

Datasheet

Title	Size (in Kbytes)	Date	 View Online	 Download	 Receive via Email
54LVX3383 10-Bit Low Power Bus-Exchange Switch	87 Kbytes	27-May-99	View Online	Download	Receive via Email
54LVX3383 Mil-Aero Datasheet MN54LVX3383-X	18 Kbytes		View Online	Download	Receive via Email

Please use [Adobe Acrobat](#) to view PDF file(s).
If you have trouble printing, see [Printing Problems](#).

Package Availability, Models, Samples & Pricing

Part Number	Package		Status	Models		Samples & Electronic Orders	Budgetary Pricing		Std Pack Size	Package Marking
	Type	# pins		SPICE	IBIS		Quantity	\$US each		
5962-9950601QLA	Cerdip	24	Full production	N/A	N/A	.	50+	\$7.7500	tube of 15	[logo]ZçSç4çA\$E 54LVX3383J-QML 5962-9950601QLA
5962-9950601QKA	Cerpack	24	Full production	N/A	N/A	.	50+	\$11.0000	tube of 19	[logo]ZçSç4çA\$E 54LVX3383W -QML 5962- 9950601QKA

Quick Search

[Parametric
Search](#)

[System
Diagrams](#)

[Product
Tree](#)

[Home](#)

[About Languages](#) . [About the Site](#) . [About "Cookies"](#)

National is [QS 9000 Certified](#) . [Privacy/Security](#)

[Copyright](#) © National Semiconductor Corporation

[Preferences](#) . [Feedback](#)