




microSI™

MMSI – Cable I/O (Male)

MMSI cable connectors are used in cable applications where signal integrity is desired. The connector interface controls the polarization of the twinax contact style. Comes with a variety of wiring and hardware options. All cable connectors are available in custom lengths.

GENERAL DIMENSIONS

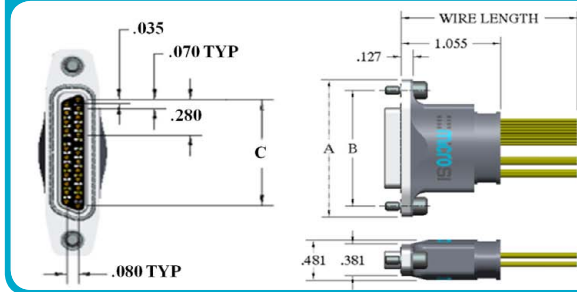

SIZE	A	B	C
1X	1.636	1.377	0.840
4X	2.266	2.007	1.470
8X	3.106	2.847	2.310

ORDER FORM

Sample Part Number Format: **MMSI-XXX-XXXX-XXX-XXXX**

ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	ENTER CODE	
MMSI							
SERIES Cable I/O (Male) 1.78 mm		STYLE 11 – Male, Twinax 100Ω 24 AWG 14 – Male, Twinax 100Ω 30 AWG		OVERALL**** 0 – None 1 – Silver-Plated Braid 2 – Tin-Plated Braid 3 – Silver-Plated Braid, Halar® Sleeving 4 – Tin-Plated Braid, Halar® Sleeving 5 – Halar® Sleeving (no braid)		WIRE LENGTH* Inches, 3 digits Ex. 018 = 18 inches	HARDWARE 620 – Fixed Jacknuts 810 – Turning Jackscrews Captivated** NXX – Keying Jacknuts*** JXX – Keying Jackscrews***
SIZE & INTERFACE POLARIZATION* 01L – 1X Left (23 pins, 4 DP +9SB) 01R – 1X Right (23 pins, 4 DP +9SB) 04L – 4X Left (41 pins, 10 DP +9SB) 04R – 4X Right (41 pins, 10 DP +9SB) 08L – 8X Left (65 pins, 18 DP +9SB) 08R – 8X Right (65 pins, 18 DP +9SB)		SIDEBAND WIRES (color code per MIL-STD-681) A – 22759/11-24 B – 22759/11-26 C – 22759/11-28 D – 22759/33-24 ☒ E – 22759/33-26 ☒ F – 22759/33-28 ☒ G – 22759/33-30 ☒ H – NEMA HP3-EXBEB 24 AWG J – NEMA HP3-EXBDB 26 AWG K – NEMA HP3-EXBCB 28 AWG L – NEMA HP3-EXBBB 30 AWG				BODY PLATING, INTERNAL SOLDER 1 – Electroless Nickel, SAC305 2 – Electroless Nickel, Sn/Pb ☒ 5 – Gold, SAC305 6 – Gold, Sn/Pb ☒	

High-Reliability Contact

MIL-DTL-83513



PLEASE CONSULT THE AIRBORN WEBSITE FOR THE LATEST REVISION OF THIS DOCUMENT PRIOR TO BEGINNING ANY DESIGN WORK.

NOTES

- Overall braid and/or Halar® will be 1.0 ± 0.5 inches shorter than specified wire length. Minimum length without overall braid or Halar® is 3 inches. If overall braid or Halar® is specified the minimum length is 6 inches.
- ☒ Option not RoHS compliant
- * Left or right polarization is determined by looking at the male interface with the LONG SIDE downward. Polarization matches the angled side. Sidebands are on the non-angled side.
- ** Captivated hardware is factory-installed and non-removable.
- *** Factory-installed and non-removable.
- **** Halar is a registered trademark of Ausimont.

MATERIALS and FINISHES

- Socket Contact: Brass
- Pin Contacts: BeCu alloy strip
- Contact Finish: Gold plate, 50 μ" minimum
- Shells: Aluminum alloy 6061-T6
- Shell Finishes: Electroless nickel or gold
- Molded Insulators: Glass-filled liquid crystal polymer (LCP)
- Embedment: Frey Eng. Co. compound CF3003-80 & L-II-49
- Hardware: Corrosion-resistant steel
- Interfacial Seal Gaskets: Fluorosilicone
- EMI Gaskets: Corrosion-resistant steel

NOTE: AirBorn can manufacture special configurations to your exact specifications.

PERFORMANCE

- Contact Rating: 3 amperes maximum
- Operating Temperature: -55° C to 125° C
- Maximum Working Voltage: 200V, RMS, 60Hz
- Insulation Resistance: 5,000 megohms minimum @ 500 VDC
- Durability: 500 connector mating cycles
- Contact Engaging Force: 6.0 ounces maximum/contact
- Contact Separating Force: 0.5 ounces minimum/contact
- Mating and Unmating Force: 10 ounces maximum/contact

NOTE: Performance values are estimates at this time. Actual values will be determined when final product testing is complete.

SIGNAL INTEGRITY PERFORMANCE (Connectors Only)

1	Diff. Impedance, filtered to 79 ps (20-80%)	100 ohm
2	Diff. Insertion Loss	10 GHz @ -3 dB
3	Diff. Return Loss	7.5 GHz @ -10 dB
4	Intra-Pair	< 2 ps