





TSRK4/10-F

- 10 Connections
- 10 Screw Connections
- 10 Flat Connections


Technical Data

Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	6.0 mm ²	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	6.0 mm ²	Working Temperature	-40 - 120 °C
Stranded with Ferrule min	0.2 mm ²	Dimensions	
Stranded with Ferrule max	4.0 mm ²	Stripped Length	9.0 mm
Clamping Range min	0.2mm ²	Width	75.0 mm
Clamping Range max	6.0 mm ²	Height	33.1 mm
		Length	27 mm

Colours

-  ORANGE, similar RAL 2003
-  BEIGE, similar RAL 1019

Connection Diagram

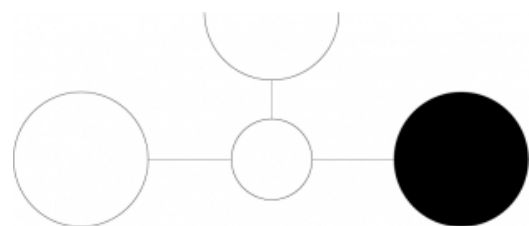

Order Data

Article Designation	Article Number	PU
TSRK4/10-F-ORANGE	41160.3	5
TSRK4/10-F-BEIGE	41160.2	5

Accessoires

Article Designation	Article Number	PU
Quick Labelling PSB7.5/40	499326.7	400
Quick Labelling PSB7.5/40-B	493327.7	400

Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage	600 V	600 V	800 V
Rated Current	30 A	30 A	32 A
Rated Wire Size	AWG 22-10	AWG 22-10	4.0 mm ²
Rated Impulse Voltage			8 V
Pollution Degree			3