


PCB Terminal Strips, Series 256, Pin Spacings 5/5.08 mm / 0.2 in; 7.5/7.62 mm / 0.3 in; 10/10.16 mm / 0.4 in




CAGE CLAMP®
CONNECTION




4
13


Front-entry

Pin spacing 5/5.08 mm / 0.2 in 0.08 – 2.5 mm² AWG 28 – 12 250 V/4 kV/3, 16 A 300 V, 15 A 500 V/4 kV/2, 16 A 300/600 V, 15 A 5 – 6 mm / 0.22 in * 	Pin spacing 7.5/7.62 mm / 0.3 in 0.08 – 2.5 mm² AWG 28 – 12 400 V/6 kV/3, 16 A 300 V, 15 A 800 V/6 kV/2, 16 A 300/600 V, 15 A 5 – 6 mm / 0.22 in * 	Pin spacing 10/10.16 mm / 0.4 in 0.08 – 2.5 mm² AWG 28 – 12 500 V/6 kV/3, 16 A 300 V, 15 A 1000 V/6 kV/2, 16 A 300/600 V, 15 A 5 – 6 mm / 0.22 in *
---	---	--

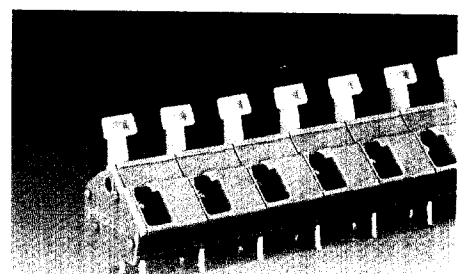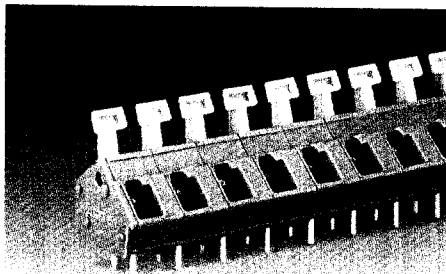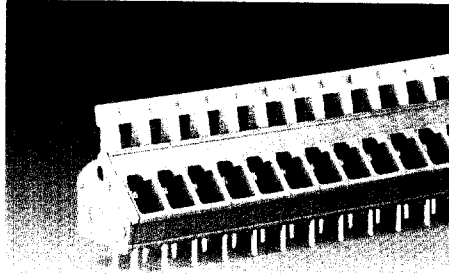


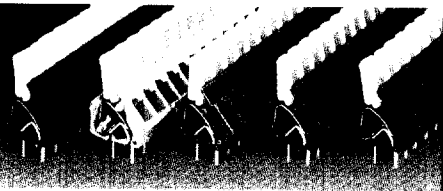No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
Terminal strips, grey, standard lengths, 2 solder pins/pole			Terminal strips, grey, standard lengths, 2 solder pins/pole			Terminal strips, grey, standard lengths, 2 solder pins/pole		
2	256-402	400 (4 x 100)	2	256-502	280 (4 x 70)	2	256-602	200 (4 x 50)
3	256-403	280 (4 x 70)	3	256-503	180 (4 x 45)	3	256-603	140 (4 x 35)
4	256-404	200 (4 x 50)	4	256-504	140 (4 x 35)	4	256-604	100 (4 x 25)
5	256-405	160 (4 x 40)	5	256-505	120 (4 x 30)	5	256-605	80 (4 x 20)
6	256-406	140 (4 x 35)	6	256-506	100 (4 x 25)	6	256-606	60 (4 x 15)
7	256-407	120 (4 x 30)	7	256-507	80 (4 x 20)	7	256-607	60 (4 x 15)
8	256-408	100 (4 x 25)	8	256-508	60 (4 x 15)	8	256-608	60 (4 x 15)
9	256-409	100 (4 x 25)	9	256-509	60 (4 x 15)	9	256-609	40 (4 x 10)
10	256-410	80 (4 x 20)	10	256-510	60 (4 x 15)	10	256-610	40 (4 x 10)
12	256-412	60 (4 x 15)	12	256-512	40 (4 x 10)	12	256-612	40 (4 x 10)
16	256-416	60 (4 x 15)	16	256-516	40 (4 x 10)	16	256-616	20 (4 x 5)
24	256-424	40 (4 x 10)	24	256-524	20 (4 x 5)	24	256-624	20 (4 x 5)
36	256-436	20 (4 x 5)						
48	256-448	20 (4 x 5)						
Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins .../332-000			Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins .../332-000			Additional item-No. for terminal strips with 5.5 mm / 0.217 in long solder pins .../332-000		
Other lengths – contact factory. For assemblies of different colors, please see form on page 4.76. Test adapters see page 4.17.			Other lengths – contact factory. For assemblies of different colors, please see form on page 4.76. Test adapters see page 4.17.			Other lengths – contact factory. For assemblies of different colors, please see form on page 4.76. Test adapters see page 4.17.		
			Additional item-Nos. for colored terminal strips blue .../000-006 dark grey .../000-008 light grey .../000-009 orange .../000-012 light green .../000-017 With blue insulating housings suitable for EEx i-applications (only suitable for pin spacings 7.5/7.62 mm/0.3 in and 10/10.16 mm/0.4 in)			Ordering examples Terminal strip, pin spacing 5/5.08 mm/0.2 in 8-pole, orange: 256-408/000-012 Terminal strip, pin spacing 7.5/7.62 mm/0.3 in 12-pole, blue: 256-512/000-006		


Dimensions (in mm) (Adjustment of pin spacing is made by pulling on the end blocks so that they expand to satisfy the hole centers required.)

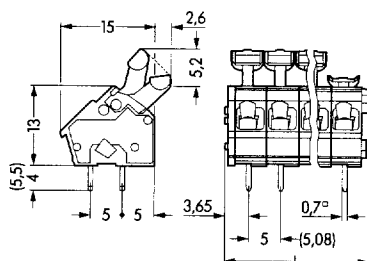

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm

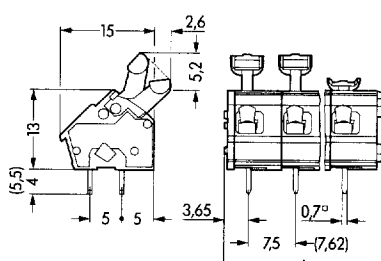

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm

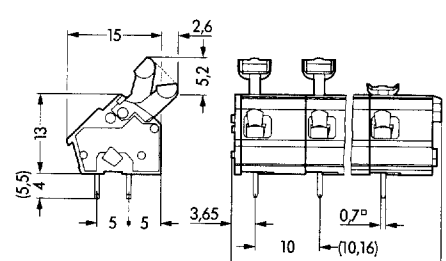

Diameter of drilled hole: 1.1^{+0.1} mm
L = (No. of poles x pin spacing) + 2.9 mm