


MEMS 1xN SWITCH MODULE

CONFIGURABLE UP TO 1x36

DiCon's MEMS 1xN Optical Switch Module is based on DiCon's MEMS 1x8 and 1x4 Optical Switch components. Up to five of the MEMS 1x8 switch components can be configured to provide a compact 1x36 switch. Each MEMS component is based on a micro-electromechanical system (MEMS) chip.

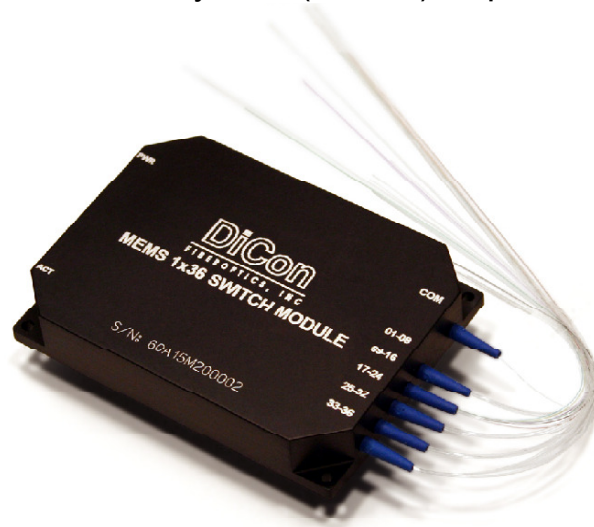

FEATURES

- Compact form-factor
- Fast switching time
- Low power consumption
- MEMS durability and reliability
- Available in other customized configurations

APPLICATIONS

The MEMS 1xN Switch is often used in channel or band monitoring cards to reduce the size and cost of monitoring DWDM networks. Other applications include fiber-based sensing, side-select switching for redundancy and secure communications, and bio-medical and scientific research. Excellent reliability, repeatability and temperature performance makes the MEMS 1xN switch ideal for temperature and environmental sensing equipment, as well as channel monitoring cards.



MEMS 1xN SWITCH MODULE

OPTICAL SPECIFICATIONS¹

PARAMETER		RATING
Insertion Loss ^{2,3}	Single-Band	1.5 dB max.
	Dual-Band	1.7 dB max.
Crosstalk ⁴		-50 dB max.
Back Reflection		-50 dB max.
Switching Time		30 ms max.
TDL		0.40 dB max.
WDL ⁵		0.30 dB max.
PDL		0.15 dB max.
Repeatability ⁶		0.04 dB max.
Durability		10 ⁹ cycles min.
Optical Power		500 mW max.
Operating Temp		-5 to 70°C
Storage Temp		-40 to 85°C
Fiber Type		9/125 µm single mode

- Specifications are without connectors.
- IL is measured at CWL, 23°C.
- IL is for standard opaque model.
- Power off isolation is same as crosstalk.
- WDL is measured in a +/- 20nm range at 23°C.
- Repeatability is defined after 100 cycles.


ELECTRICAL SPECIFICATIONS

PARAMETER	RATING
Latching Type	non-latching
Control Type	I ² C or RS232
Vcc Voltage	12 VDC
Power Consumption	700 mW max.
Connector Type	Molex 87833-1620


MECHANICAL DIMENSIONS

(Units: mm)


Top View

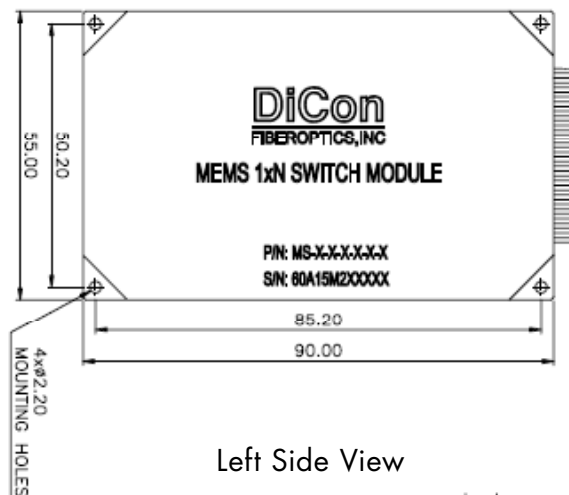

Left Side View

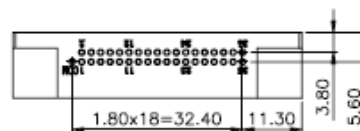

Right Side View

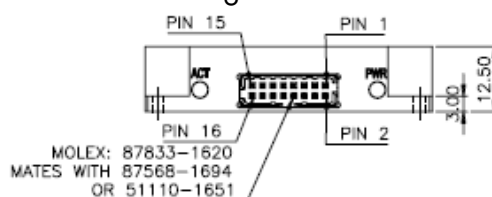

ORDERING INFORMATION

MS2 - - - - - -

Product Code

MS2 MEMS Switch

Switch Configuration

1xN 1xN, Specify N<36

Control Interface

I²C I²C
RS2 RS232

Wavelength Range

13 1290 - 1330 nm
15 1530 - 1570 nm
16 1570 - 1610 nm
13/15 1290 - 1330 & 1530 - 1570 nm
15/16 1530 - 1570 & 1570 - 1610 nm

Pigtail Length

1 1 Meter
X Specify X Meters
Tolerance is +/- 0.05 m

Connector Type

FC/SPC FC/SPC
FC/APC FC/APC
N NONE

Also Available: SC, SC/UPC, SC/APC, ST, ST/UPC, LC

Fiber and Jacket Type

9/BF Corning SMF-28, Bare fiber
9/TB Corning SMF-28, Tight Buffer
9/LT Corning SMF-28, Loose-tube
Or other equivalent 9µm Singlemode fiber