


SD

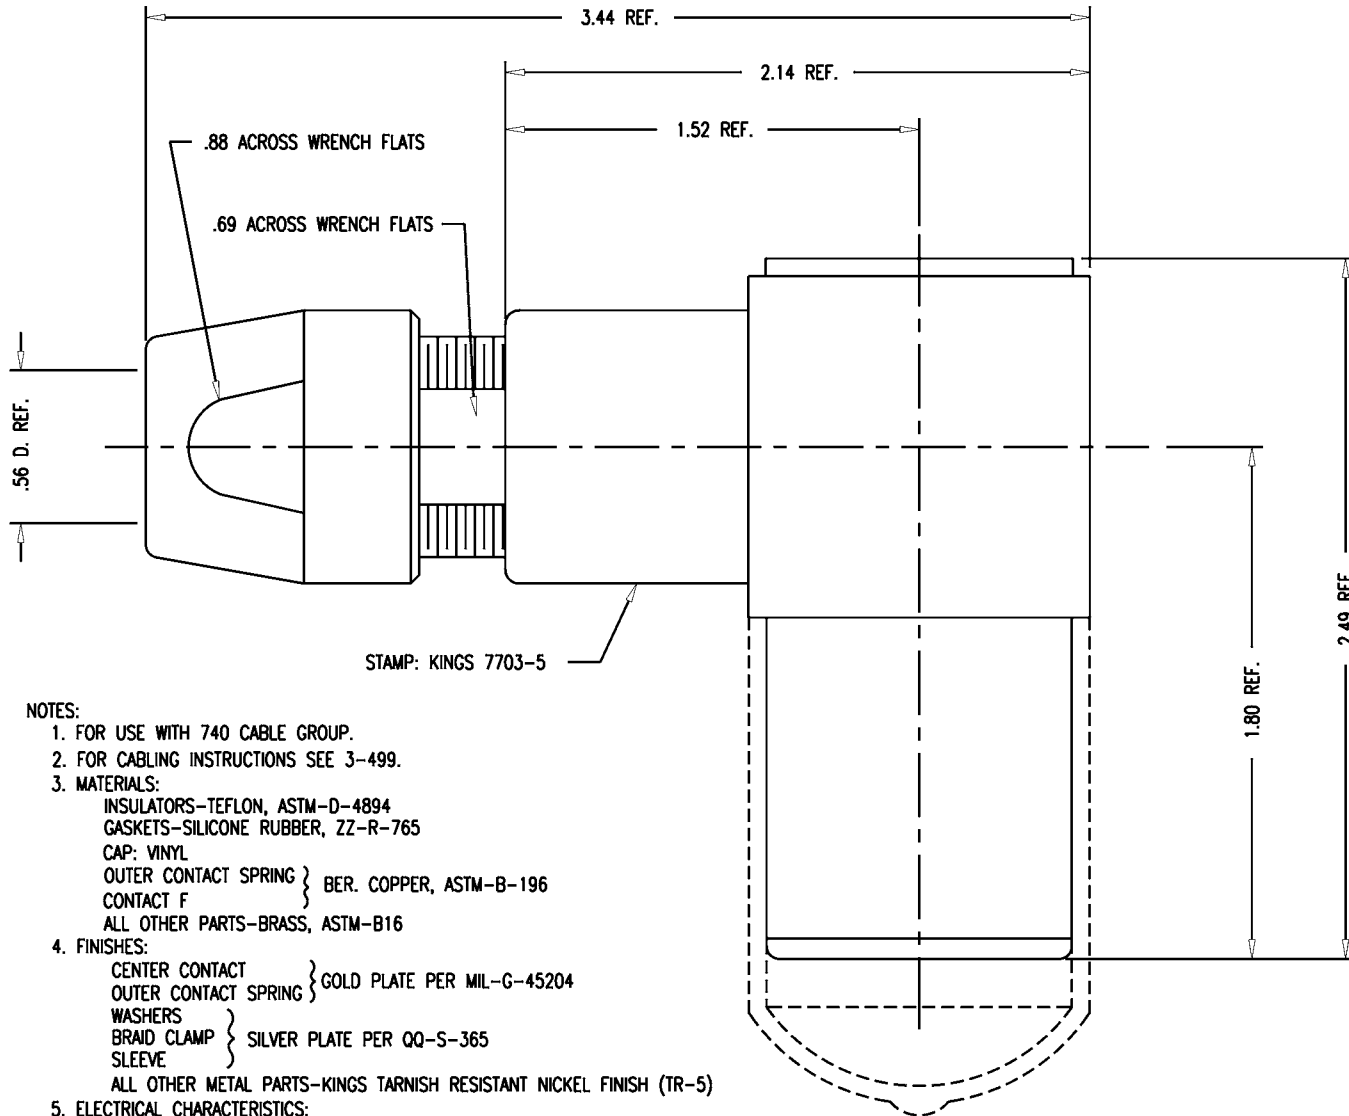

NOTES:

1. FOR USE WITH 740 CABLE GROUP.
2. FOR CABLING INSTRUCTIONS SEE 3-499.
3. MATERIALS:
 - INSULATORS-TEFLON, ASTM-D-4894
 - GASKETS-SILICONE RUBBER, ZZ-R-765
 - CAP: VINYL
 - OUTER CONTACT SPRING } BER. COPPER, ASTM-B-196
 - CONTACT F }
 - ALL OTHER PARTS-BRASS, ASTM-B16
4. FINISHES:
 - CENTER CONTACT } GOLD PLATE PER MIL-G-45204
 - OUTER CONTACT SPRING }
 - WASHERS } SILVER PLATE PER QQ-S-365
 - BRAID CLAMP }
 - SLEEVE }
 - ALL OTHER METAL PARTS-KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
5. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 75 \sim W
 - FREQUENCY RANGE: DC TO 500 MHz
 - VOLTAGE BREAKDOWN:
 - CENTER CONDUCTOR/INNER GROUND: 1500 VOLTS RMS
 - INNER GROUND/OUTER GROUND: 500 VOLTS RMS

7703-5

REVISIONS

| ISSUE | CHANGES |
|-------|----------------------------|
| 0 | ER 35447 ME 04/18/95 |
| 1 | CN 37377 D JW 08/07/97 |
| 2 | CN 38864 E JPK 06/03/03 |

7703-5SD

SCALE 2:1

APPROX SURFACE AREA

USED ON

REF: KP-8023-740-400

JACK, ANGLE, TRI-LOC
SERIAL DIGITAL

| | | | |
|--------|----|------|----------|
| DRAWN | ME | DATE | 04/18/95 |
| DESIGN | DW | DATE | 04/20/95 |
| APPR. | FD | DATE | 05/12/95 |

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

7703-5

SD