


Moderately Configured Aluminum Pin Fin Heat Sinks

- Designed for airspeed environments ranging from 100 to 400 LFM
- Generate exceptional cooling power
- Possess low pressure drop characteristics
- Forged from highly conductive pure aluminum
- Overall height can be customized to any dimension between 0.15" to 0.8"
- Single or multiple pins can be eliminated to meet application specific requirements
- Secondary operations available (e.g. through holes, threads)
- Parts are RoHS compliant.

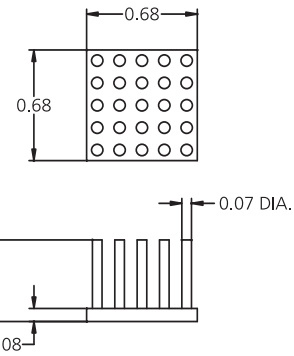

P/N	Length in(mm)	Width in(mm)	Height in(mm)	Weight lbs(g)	# of pins	TR (°C/W)		
						200	400	600
3-070702U	0.68(17.3)	0.68(17.3)	0.20(5.1)	0.0049(2.2)	25	22.38	15.94	12.88
3-070703U	0.68(17.3)	0.68(17.3)	0.30(7.6)	0.0058(2.6)	25	12.23	8.71	7.04
3-070704U	0.68(17.3)	0.68(17.3)	0.40(10.2)	0.0068(3.1)	25	10.65	7.29	5.85
3-070705U	0.68(17.3)	0.68(17.3)	0.50(12.7)	0.0077(3.5)	25	9.06	5.87	4.66
3-070706U	0.68(17.3)	0.68(17.3)	0.60(15.2)	0.0087(3.9)	25	7.61	4.93	3.91
3-070707U	0.68(17.3)	0.68(17.3)	0.70(17.8)	0.0097(4.4)	25	6.61	4.29	3.40
3-070708U	0.68(17.3)	0.68(17.3)	0.80(20.3)	0.0106(4.8)	25	5.80	3.76	2.98

Finishes
 Anodize (Black/Clear)
 Alodine (Yellow/Clear)

Attachment Methods
 Mechanical Clips (Straight & Diagonal)
 Pre-applied double-sided thermal tape
 Thermally-conductive glue

See Disclaimer on page 3