

# Volume-Holographic-Grating (VHG) Wavelength-Stabilized Single-Frequency Laser DIODE

LD785-SEV300



S/N: 785WOPK44.B04

Wavelength: 784.4nm

Test Date: 11/15/2018



Diode Package: TO 9 mm

Tested By: Paya



QA: Pass


## Summary of Test Data ( CW )

Parameter	Symbol	Value	Unit
Operating Current@300mW,20.0°C	$I_{OP}$	412.71	mA
Voltage@300mW,20.0°C	$V_F$	2.00	V
Side-Mode Suppression Ratio@300mW,20.0°C	SMSR	41.4	dB
Threshold Current@20.0°C	$I_{th}$	95.8	mA
Slop Efficiency@20.0°C	$\Delta P/\Delta I$	0.93	W/A

## Absolute Maximum Ratings


Parameter	Ratings
Laser Diode Current*	450
Optical Output Power*	310
LD Reverse Voltage*	2
Storage Temperature	-20 to 65
Case Temperature	15 to 35

\* CW




CAUTION- use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure. There are no user serviceable parts in this product. When proper power is applied to this product, Laser radiation will be emitted from TO-window.


785WOPK44.B04  
20.0 °C

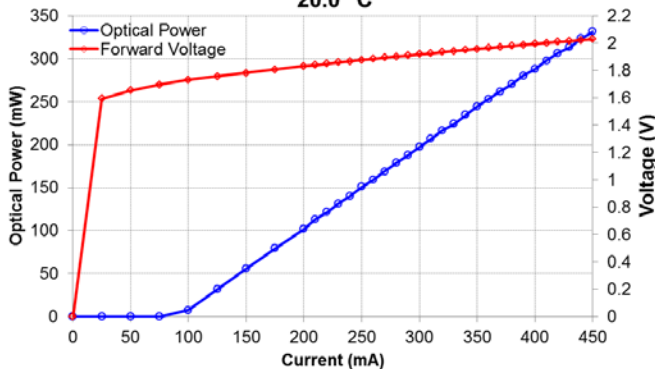

Diode Bottom View



Pin Code E



## Important Notes:

1. The maximum ratings mean the limitation over which the laser should not be operated even instant time.
2. To protect the laser diode from damage due to static electricity (ESD), please follow proper ESD handling precautions.
3. To ensure safe operation use only with a suitable power source that complies with the pertinent requirements for laser systems as specified in IEC-60825-1 "Safety of Laser Products."



### USA, Canada, and South America

Thorlabs, Inc.  
56 Sparta Avenue  
Newton, NJ 07860, USA

Tel: 973-579-7227  
Fax: 973-300-3600

### Europe

Thorlabs GmbH  
85221 Dachau, Germany  
Tel: +49-(0)8131-5956-0

### Scandinavia

Thorlabs Sweden AB  
400 20 Göteborg, Sweden  
Tel: +46-31-733-30-00

### UK and Ireland

Thorlabs LTD.  
Cambridgeshire CB7 4EX, GB  
Tel: +44 (0)1353-654440

### Japan and Asia

Thorlabs Japan Inc.  
Toshima-ku, Tokyo 170-0013, Japan  
Tel: +81-3-6915-7701

### France

Thorlabs SAS  
78600 Maisons-Laffitte, France  
Tel: +33 (0) 970 444 844

### China

Thorlabs China  
Shanghai, China  
Tel: +86 (0)21-32513486



785WOPK44.B04

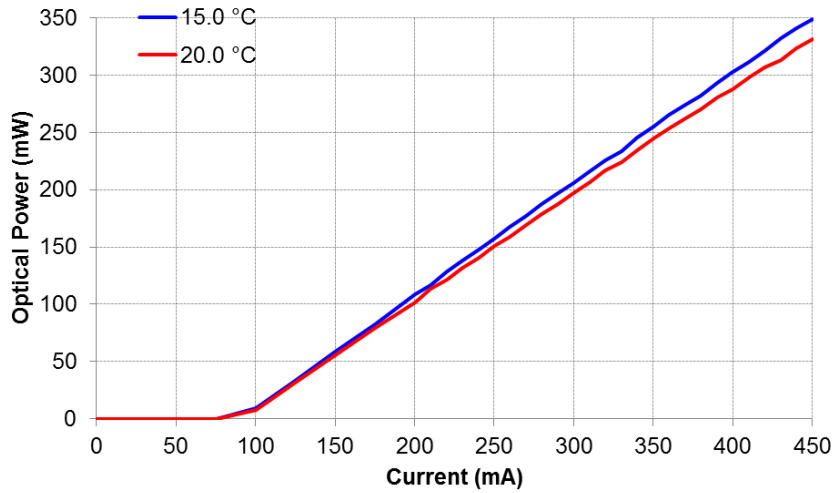


Figure 2: Output Power vs. Current over wavelength stabilized temperature range.

785WOPK44.B04

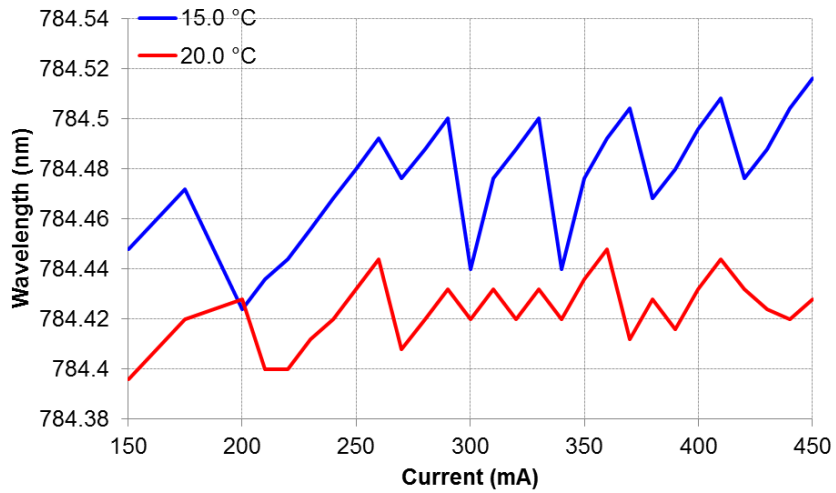


Figure 3: Wavelength vs. Current over wavelength stabilized temperature range. Measured with Yokogawa AQ6370C, Resolution Bandwidth = 0.02nm.

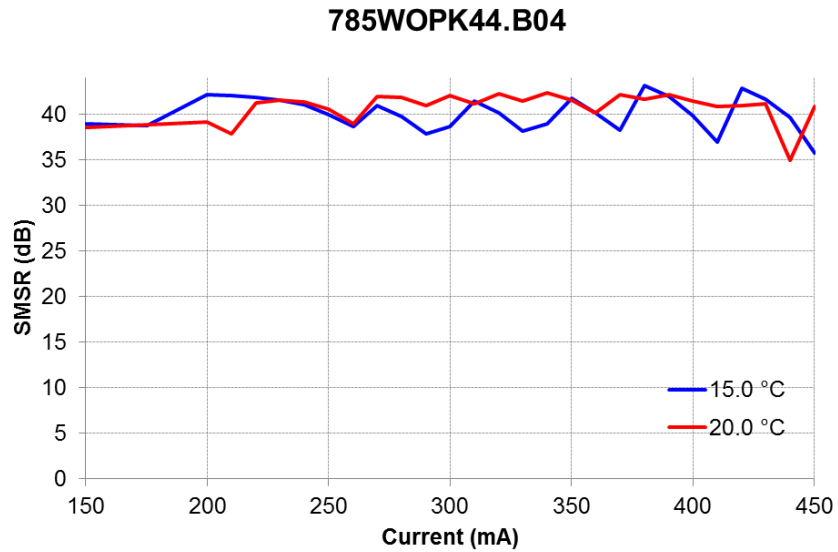


Figure 4: Side-Mode Suppression Ratio vs. Current over wavelength stabilized temperature range. Measured with Yokogawa AQ6370C, Resolution Bandwidth = 0.02nm.

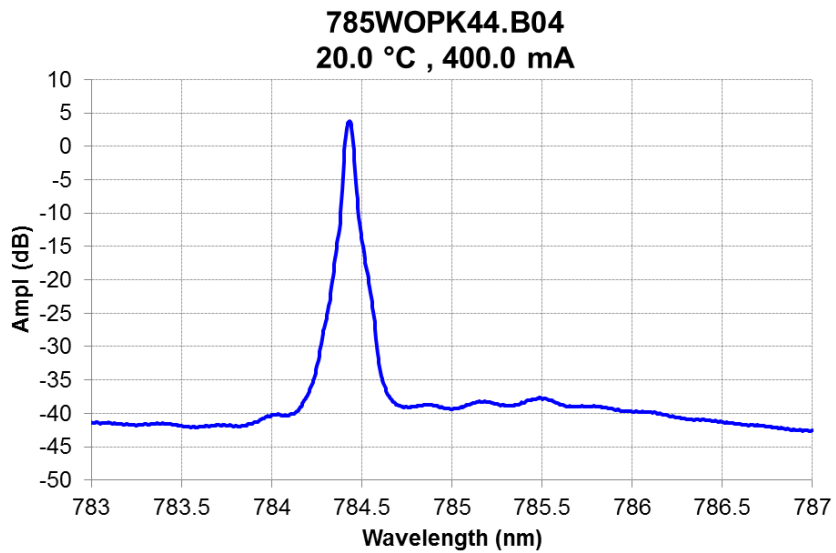


Figure 5: Optical Spectrum. Measured with Yokogawa AQ6370C, Resolution Bandwidth = 0.02nm.