
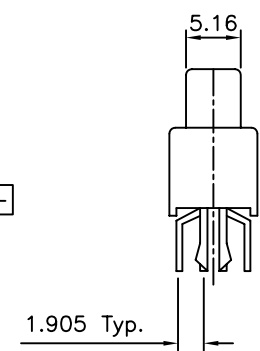
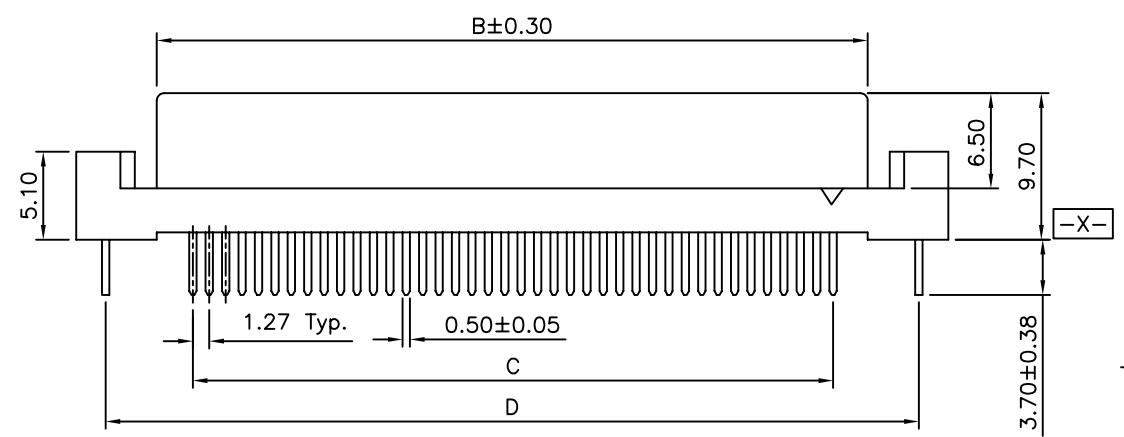


SPECIFICATIONS

Current Rating: 0.5A Max.
 Dielectric Withstanding Voltage: 500V AC RMS For 1 Minute
 Insulation Resistance: 1000 Megohms Min. At 500V DC
 Contact Resistance: 30 Milliohms Max.
 Operating Temperature: -20°C To +85°C
 Durability: 500 Cycles
 Housing: Thermoplastic(UL 94V-0),Black
 Terminal: 0.30mm Thickness Copper Alloy
 Gold Plated On Contact, Tin Plated On Solder Tail
 Retention Leg: Copper Alloy, Tin Plated

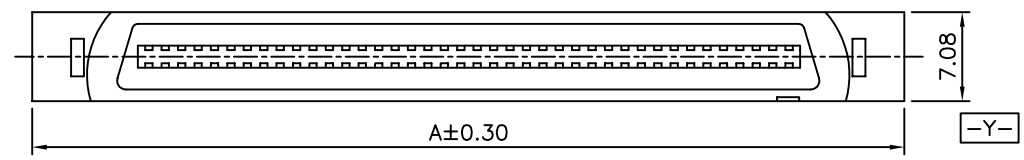

| Position | A | B | C | D |
|----------|-------|-------|-------|-------|
| 20 | 24.22 | 16.74 | 11.43 | 21.32 |
| 40 | 36.92 | 29.44 | 24.13 | 34.02 |
| 60 | 49.62 | 42.14 | 36.83 | 46.72 |
| 68 | 54.70 | 47.22 | 41.91 | 51.80 |
| 80 | 62.32 | 54.84 | 49.53 | 59.42 |

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

| | | | | |
|-----------------------|----|------------------|------|---|
| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 ANG. ±3° UNIT mm |
| PART No. SCAXXXSDM | | MEI | | |
| DRAWING No. SCAXXXSDM | | CHECKED BY BECKY | | |
| SCALE NONE | | DRAWING BY HZF | | |
| REV. | A0 | NO. | REV. | UNIT mm |

| | | | |
|------|-------------|-----------|------------|
| △ A0 | NEW RELEASE | BECKY | 09/28/2005 |
| NO. | REV. | REVISIONS | CHK DATE |