

## Cascadable Amplifier 10 to 1500 MHz

**A29-1/ SMA29-1**

V3

### Features

- HIGH OUTPUT POWER: +22 dBm (TYP.)
- HIGH THIRD ORDER I.P.: +32 dBm (TYP.)


### Description

The A29-1 RF amplifier is a discrete thin film hybrid design, which incorporates the use of thin film manufacturing processes for accurate performance and high reliability.

This single stage bipolar transistor feedback amplifier design displays impressive performance over a broadband frequency range. An active DC biasing network is used for temperature-stable performance, in addition to an RF Choke, used for power supply decoupling.

Both TO-8 and Surface Mount packages are hermetically sealed, and MIL-STD-883 environmental screening is available.

### Product Image

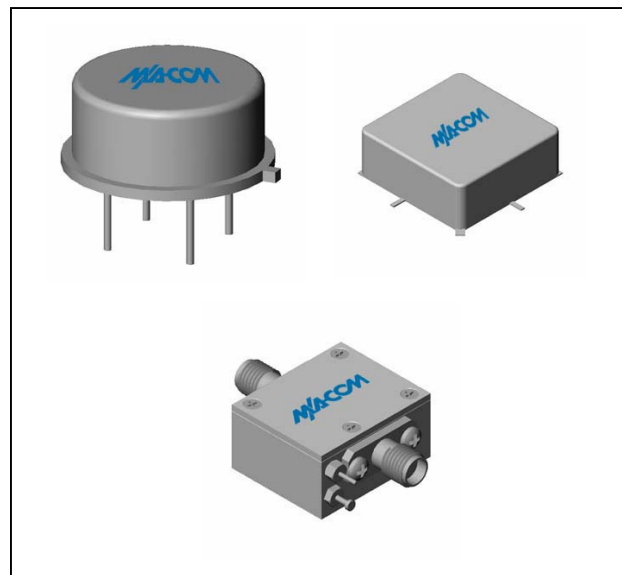

### Ordering Information

| Part Number | Package           |
|-------------|-------------------|
| A29-1       | TO-8              |
| SMA29-1     | Surface Mount     |
| CA29-1      | SMA Connectorized |

### Electrical Specifications: $Z_0 = 50\Omega$ , $V_{CC} = +15 V_{DC}$

| Parameter                          | Units | Typical       | Guaranteed    |                |
|------------------------------------|-------|---------------|---------------|----------------|
|                                    |       | 25°C          | 0° to 50°C    | -54° to +85°C* |
| Frequency                          | MHz   | 10-1600       | 10-1500       | 10-1500        |
| Small Signal Gain (min)            | dB    | 9.0           | 8.5           | 7.5            |
| Gain Flatness (max)                | dB    | ±0.2          | ±0.5          | ±1.0           |
| Reverse Isolation                  | dB    | 14            |               |                |
| Noise Figure (max)                 | dB    | 5.5           | 6.5           | 7.0            |
| Power Output<br>@ 1 dB comp. (min) | dBm   | 22.0          | 20.0          | 19.0           |
| IP3                                | dBm   | +32           |               |                |
| IP2                                | dBm   | +49           |               |                |
| Second Order Harmonic IP           | dBm   | +57           |               |                |
| VSWR Input / Output (max)          |       | 1.6:1 / 1.6:1 | 1.9:1 / 1.9:1 | 2.0:1 / 2.0:1  |
| DC Current @ 15 Volts (max)        | mA    | 90            | 94            | 99             |

### Absolute Maximum Ratings

| Parameter                                 | Absolute Maximum |
|-------------------------------------------|------------------|
| Storage Temperature                       | -62°C to +125°C  |
| Case Temperature                          | +125°C           |
| DC Voltage                                | +17 V            |
| Continuous Input Power                    | 15.5 dBm         |
| Short Term Input power<br>(1 minute max.) | 100 mW           |
| Peak Power (3 µsec max.)                  | 0.5 W            |
| "S" Series Burn-In<br>Temperature (case)  | +125°C           |

### Thermal Data: $V_{CC} = +15 V_{DC}$

| Parameter                                        | Rating  |
|--------------------------------------------------|---------|
| Thermal Resistance $\theta_{jc}$                 | 100°C/W |
| Transistor Power Dissipation $P_d$               | 0.966 W |
| Junction Temperature Rise<br>Above Case $T_{jc}$ | +96°C   |

\* Over temperature performance limits for part number CA29-1, guaranteed from 0°C to +50°C only.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266  
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300  
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macom.com](http://www.macom.com) for additional data sheets and product information.

# Cascadable Amplifier 10 to 1500 MHz


**A29-1/ SMA29-1**

V3


## Typical Performance Curves at +25°C

## Outline Drawing: TO-8 \*


**Gain**

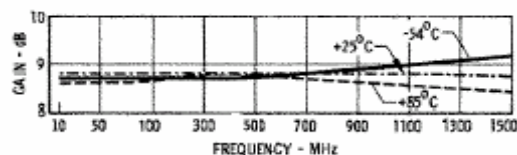

**Noise Figure**

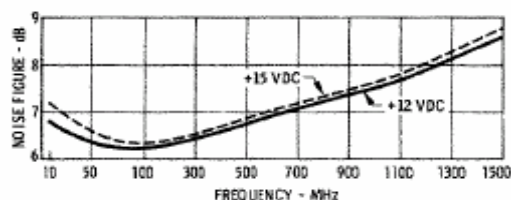


**Power Output\***


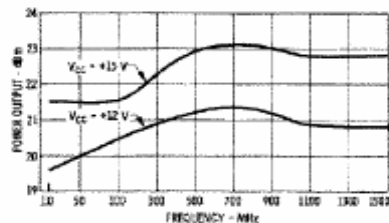


\* at 1 dB Gain Compression


**Intercept Point**

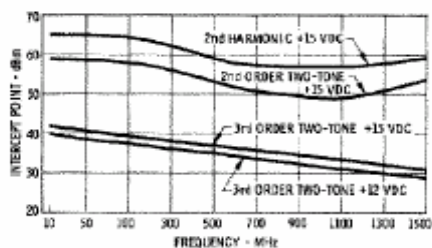


**VSWR**

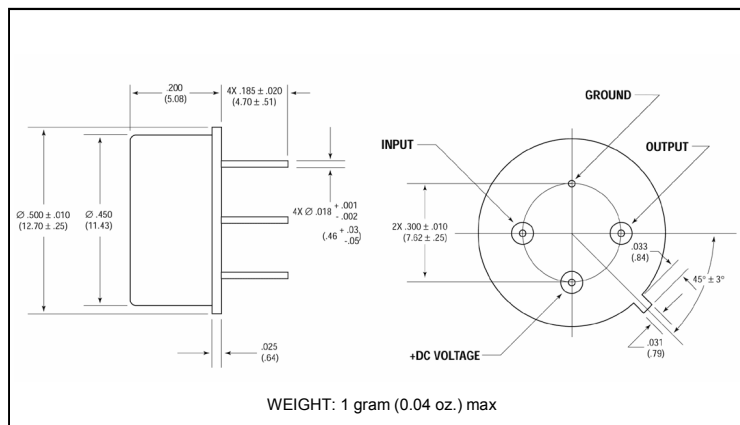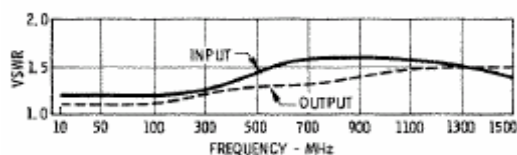

## Outline Drawing: Surface Mount \*

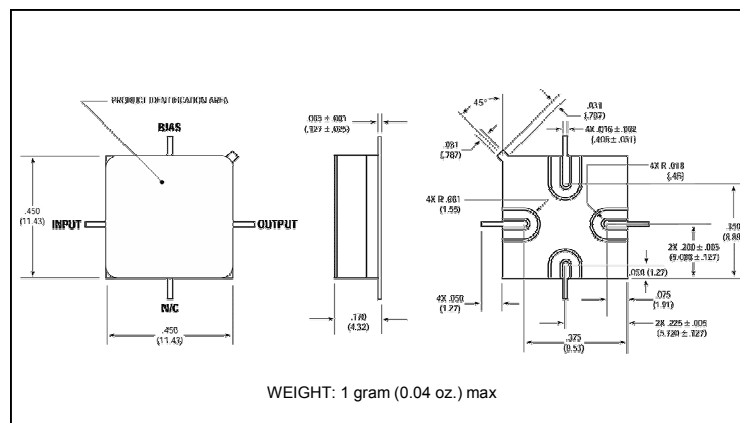

## Outline Drawing: SMA Connectorized \*

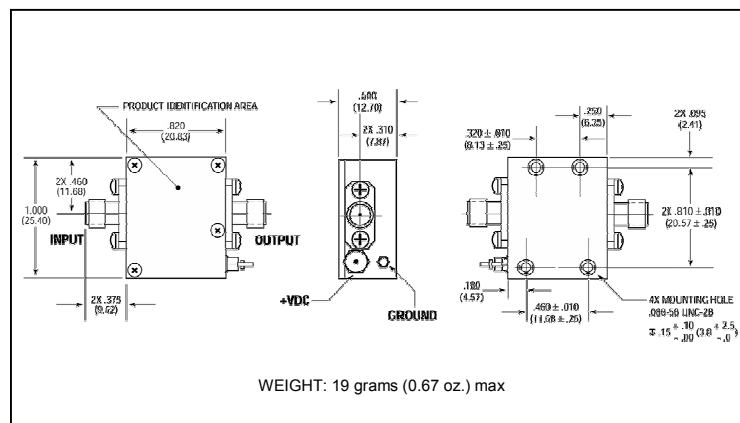

\* Dimensions are inches (millimeters)  $\pm 0.015$  (0.38) unless otherwise specified.