




## 3-1743336-3 Product Details

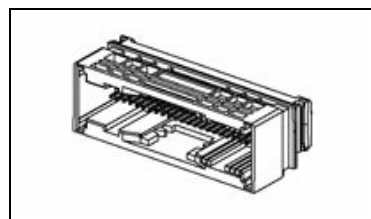

**3-1743336-3**

TE Internal Number: 3-1743336-3

**Active**

### Micro-Power & Power Quadlok System

Always ELV Compliant (Statement of Compliance)

#### Product Highlights:

- Applies To Printed Circuit Board
- Connector
- Connector Assembly
- Connector Style = Header
- 75 Positions

[View all Features](#)

#### Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | 
 [Request Sample](#) | 
 [Find Similar Products](#) | 
 [Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- [AIR BAG 75P HEADER ASSEMBLY \(FA-II\)](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- None Available

#### Product Specifications:

- None Available

#### Application Specifications:

- None Available

#### Instruction Sheets:

- None Available

#### CAD Files:

- None Available

#### Additional Information:

- [Product Line Information](#)

#### Related Products:

- [Tooling](#)

[List all Documents](#)

Feedback

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- [Product Type](#) = Connector
- Connector Type = Connector Assembly
- Sealed = No
- Mount Angle = Right Angle
- Post Type = 0.64 [.025] Square
- Keyed = Yes

#### Termination Features:

- Termination Method to PC Board = Through Hole - Solder

#### Contact Features:

- Contact Type = Tab
- Contact Style = Right-Angle
- [Tab Contacts](#) = Without
- 2.5mm Pin Diameter Contacts = Without
- [Contact Finish](#) = Selective Gold
- Contact Shape = Square
- Contact Base Material = Phosphor Bronze

#### Housing Features:

- Connector Style = Header
- [Centerline, Matrix \(mm \[in\]\)](#) = 2.54 x 5.5 [.100 x .216]
- Header Color = Oyster White
- Housing Material = PBT - GF

#### Configuration Features:

- [Number of Positions](#) = 75
- Fiber Optic Contacts = Without
- Staggered Centerline = Without

#### Industry Standards:

- [RoHS/ELV Compliance](#) = ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was ELV compliant

#### Identification Marking:

- Key ID = D-E

#### Conditions for Usage:

- Applies To = Printed Circuit Board

#### Other:

- Brand = TE Connectivity

