



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**



**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

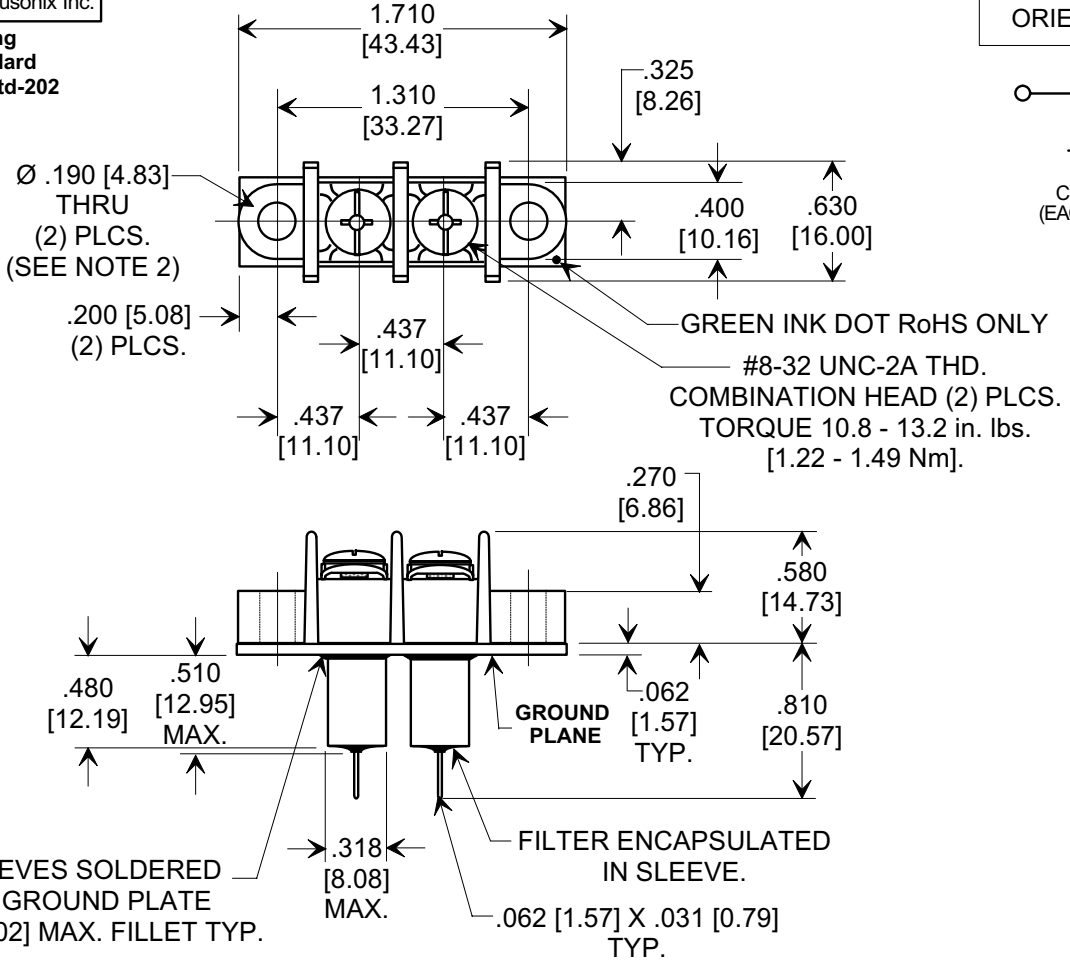

**NOTES:**

1. TUSONIX STANDARD PART NUMBER: 7602-603. TUSONIX RoHS COMPLIANT PART NUMBER: 7602-603 LF. CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. LEAD FINISH: MATTE TIN.
3. PLATE MATERIAL: .062" COPPER ALLOY, MATTE TIN FINISH.
4. PART MARKING: PART NUMBER, DATE CODE AND UL RECOGNITION: WHITE INK. RoHS PART: GREEN INK DOT ON TOP OF GROUND PLATE AS SHOWN.
5. MAX. SOLDERING TEMPERATURE 500°F [260°C].
6. BLOCK MOUNTING: RECOMMENDED MOUNTING SCREWS (# 8 PAN HEAD). TORQUE 4.5 - 5.5 in. Lb. [0.51 - 0.62 Nm].
7. MOLDED MATERIAL: HIGH TEMPERATURE THERMOPLASTIC (PBT), UL RATED 94 V-O.
8. RATED FOR DIRECT CURRENT APPLICATIONS ONLY.
9. U.L. FILE NO: E201344.
10. PARTS TO BE SUPPLIED WITH TERMINAL BLOCK COVER. COVER TO BE INSTALLED BY CUSTOMER.

Cx (pF)	WORKING VOLTAGE -40°C TO +125°C	I <sub>DC</sub>	D.W.V.	I.R. MIN.	TYPICAL NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			
					10 MHz	100 MHz	1 GHz	10 GHz
12,000/27,000	150 VDC	30 Amps	2121 VDC (60 SEC.)	10 G Ω	28	45	70	70

REVISION RECORD	Original Release	TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± N/A 3 PLC. DECIMAL ± .030 [0.76] ANGLES ± N/A	Title <b>"C" FEED - THRU TERMINAL BLOCK 2 POSITION (UL RECOGNIZED)</b>		
	WAS SK 8188-592. S.M. 11-21-05			Drawn S.M. 11-21-05	Scale FULL
	20051104-5-02 NOTE 4 REVISED. ADDED INK DOT. REVISED TORQUE. S.M. 01-23-06			Approved R.C. 11-21-05	
	20060103-1-18			<b>TUSONIX</b> TUCSON, ARIZONA	<b>A</b>

X-2015 Rev-0