



# Models 5RL & 5SFT

## Current Transformer



5 SFT





5 RL

### Features

- Window Diameter 1.56"
- Frequency 50-400 Hz.
- Insulation Level 600 Volt, 10 kV BIL full wave.
- Flexible leads are UL 1015, 105°C., CSA approved. #16 AWG, 24" long.
- Non-standard length to be specified.
- Terminals are brass studs No. 8-32 with one flatwasher, lockwasher and regular nut.
- Approximate weight 1.0 lbs.

- **Application:** With ammeters, wattmeters, and cross current compensation.

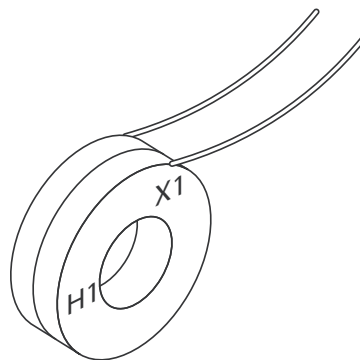

### Specifications

Catalog Number	Current Ratio	Accuracy at 60 Hz	Burden VA at 60 Hz
5**-500	50:5	±2%	1.0
5**-750	75:5	±2%	1.5
5**-101	100:5	±2%	2.0
5**-151	150:5	±1%	5.0
5**-201	200:5	±1%	5.0
5**-251	250:5	±1%	10.0
5**-301	300:5	±1%	12.5
5**-401	400:5	±1%	12.5
5**-501	500:5	±1%	20.0
5**-601	600:5	±1%	25.0
5**-751	750:5	±1%	25.0
5**-801	800:5	±1%	25.0
5**-102	1000:5	±1%	25.0
5**-122	1200:5	±1%	30.5

\*Note: When ordering, prefix Cat No. with model designation required i.e. 5SFT—500, 5RL—500.

