

Description


The HL1321AC/BF/DL/DM and HLP5400 are 1.3 μm band InGaAsP laser diodes with a double heterostructure. They are suitable as light sources for optical fiber communication systems and various types of optical equipment.

Features

- Long wavelength oscillation:
 $\lambda_p = 1270$ to 1330 nm (AC, HLP5400)
- Long wavelength oscillation:
 $\lambda_p = 1290$ to 1330 nm (BF, DL, DM)
- Room temperature
5mW CW operation (AC, HLP5400)
- High speed pulse response: $t_r, t_f \leq 0.5$ ns
- Attached single mode fiber (BF, DL, DM)
- High output:
 $P_f = 1.2$ mW (CW, pulse operation) (BF, DL)
- High output:
 $P_f = 1.5$ mW (CW, pulse operation) (DM)

Fiber Specifications (BF, DL, DM only)

Mode field diameter: 10.0 ± 1.0 μm
Cutoff wavelength: 1.10 to 1.20 μm
Core diameter: 10 μm
External diameter: 125 μm
Jacket diameter: 900 μm
Fiber length: More than 500 mm

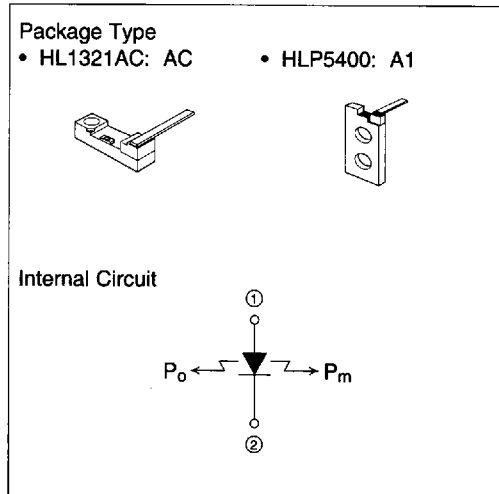


1

HL1321AC/BF/DL/DM, HLP5400

Pin Connections (Bottom view)

• HL1321BF

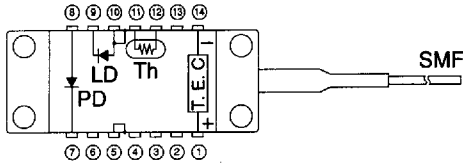


LD: Laser diode
 PD: Photodiode
 Th: Thermistor
 T. E. C.: T. E. cooler
 SMF: Single-mode fiber

- ① T.E.C. anode
- ② N. C.
- ③ N. C.
- ④ N. C.
- ⑤ Case
- ⑥ N. C.
- ⑦ PD cathode
- ⑧ PD anode
- ⑨ LD cathode
- ⑩ LD anode (case)
- ⑪ Thermistor
- ⑫ Thermistor
- ⑬ N. C.
- ⑭ T. E. C. cathode

Package Type
 • HL1321BF: BF

• HL1321DL

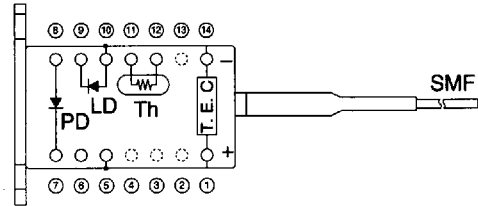


LD: Laser diode
 PD: Photodiode
 Th: Thermistor
 T. E. C.: T. E. cooler
 SMF: Single-mode fiber

- ① T.E.C. anode
- ② —
- ③ —
- ④ —
- ⑤ Case
- ⑥ N. C.
- ⑦ PD cathode
- ⑧ PD anode
- ⑨ LD cathode
- ⑩ LD anode (case)
- ⑪ Thermistor
- ⑫ Thermistor
- ⑬ —
- ⑭ T. E. C. cathode

Package Type
 • HL1321DL: DL

• HL1321DM

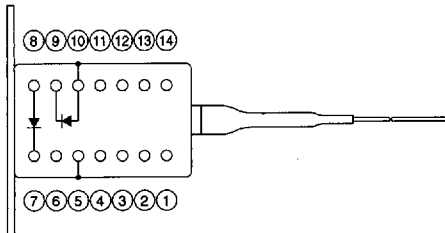

Package Type
 • HL1321DM: DM

- ① N. C.
- ② N. C.
- ③ N. C.
- ④ N. C.
- ⑤ Case
- ⑥ N. C.
- ⑦ PD cathode
- ⑧ PD anode
- ⑨ LD cathode
- ⑩ LD anode (case)
- ⑪ N. C.
- ⑫ N. C.
- ⑬ N. C.
- ⑭ N. C.

4496205 0014341 189

Part

HITACHI

206 1

Hitachi America, Ltd. • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1835 • (415) 589-8300

HL1321AC/BF/DL/DM, HLP5400

Absolute Maximum Ratings ($T_C = 25^\circ\text{C}$)

Item		Symbol	Rated Value	Unit
Optical output power	HL1321AC / HLP5400	P_O	5	mW
Fiber optical output power	HL1321BF/DL	P_f	1.2	mW
	HL1321DM		1.5	
LD reverse voltage		$V_{R(LD)}$	2	V
PD reverse voltage	HL1321BF/DL/DM	$V_{R(PD)}$	15	V
PD forward current		$I_F(PD)$	1	mA
Cooler current	HL1321BF/DL	I_C	1.4	A
Operating temperature	HL1321AC/BF/DL	T_{opr}	0 to + 60	$^\circ\text{C}$
	HL1321DM		0 to + 65	
	HLP5400		0 to + 50	
Storage temperature	HL1321AC	T_{stg}	0 to + 80	$^\circ\text{C}$
	HL1321BF/DL		- 40 to + 70	
	HL1321DM		- 20 to + 70	
	HLP5400		0 to + 60	

Optical and Electrical Characteristics ($T_C = 25^\circ\text{C}$)

Item		Symbol	Min	Typ	Max	Unit	Test Conditions
Threshold current	HL1321AC/ BF/DM/DL	I_{th}	—	30	50	mA	
	HLP5400		—	30	80		
Optical output power	HL1321AC/ HLP5400	P_O	5	—	—	mW	Kink free
			1.5	3.0	—		$I_F = I_{th} + 20 \text{ mA}$
Fiber optical output power	HL1321BF/DL	P_f	1.2	—	—	mW	Kink free
			0.6	—	—		$I_F = I_{th} + 20 \text{ mA}$
	HL1321DM	P_f	1.5	—	—	mW	Kink free
			0.75	—	—		$I_F = I_{th} + 20 \text{ mA}$
Monitor output	HL1321AC/ HLP5400	P_m	1.0	—	—	mW	$I_F = I_{th} + 20 \text{ mA}$
Lasing Wave-length	HL1321AC/ HLP5400	λ_p	1270	1300	1330	nm	$P_O = 3 \text{ mW}$
			1290	1310	1330		$P_f = 0.5 \text{ mW}$
	HL1321DM	λ_p	1290	1310	1330	m	$P_f = 1.2 \text{ mW}$

4496205 0014342 015

HITACHI

Hitachi America, Ltd. • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1835 • (415) 589-8300

Part

1 207

HL1321AC/BF/DL/DM, HLP5400

Optical and Electrical Characteristics ($T_C = 25^\circ\text{C}$) (cont.)

Item		Symbol	Min	Typ	Max	Unit	Test Conditions
Spectral width at half power	HL1321AC/HLP5400	$\Delta\lambda$	—	2	—	nm	$P_O = 3 \text{ mW}$
	HL1321BF/DL		—	2	—		$P_f = 0.5 \text{ mW}$
	HL1321DM		—	2	—		$P_f = 1.2 \text{ mW}$
Beam divergence (parallel)	HL1321AC/HLP5400	θ_{\parallel}	—	30	—	deg.	$P_O = 3\text{mW}$, FWHM
Beam divergence (perpendicular)		θ_{\perp}	—	40	—	deg.	$P_O = 3\text{mW}$, FWHM
PD dark current	HL1321BF/DL/DM	I_{DARK}	—	—	350	nA	$V_R(\text{PD}) = 5 \text{ V}$
Monitor current	HL1321BF/DL	I_S	50	—	—	μA	$V_R(\text{PD}) = 5 \text{ V}$, $P_f = 0.5 \text{ mW}$
	HL1321DM		100	—	—		$V_R(\text{PD}) = 5 \text{ V}$, $P_f = 1.2 \text{ mW}$
PD capacitance	HL1321BF/DL/	C_f	—	10	20	pF	$V_R(\text{PD}) = 5 \text{ V}$, $f = 1 \text{ MHz}$
Photosensitivity saturation bias voltage		$V_{R(S)}$	—	—	2	V	
Cooling capacity	HL1321BF/DL	ΔT	40	—	—	$^\circ\text{C}$	$P_f = 1.0 \text{ mW}$
Cooler current		I_C	—	—	1.4	A	$\Delta T = 40^\circ\text{C}$
Cooler voltage		V_C	—	—	1.8	V	$\Delta T = 40^\circ\text{C}$
Thermistor resistance		R_{TM}	—	10	—	$\text{k}\Omega$	
Rise time		t_r	—	—	0.5	ns	
Fall time		t_f	—	—	0.5	ns	

4496205 0014343 T51

Part

1

HITACHI[®]


208

Hitachi America, Ltd. • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1835 • (415) 589-8300


Typical Characteristic Curves




Optical Output Power vs. Forward Current
(HL1321AC, HLP5400)

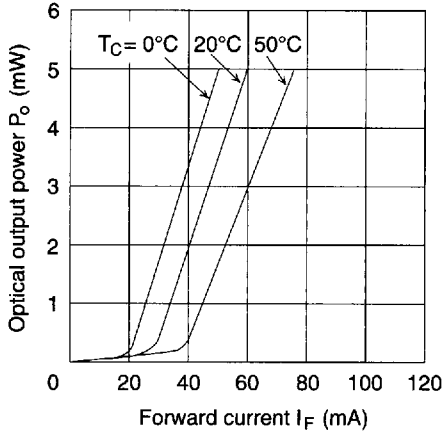


Optical Output Power vs. Forward Current
(HL1321BF, DL, DM)

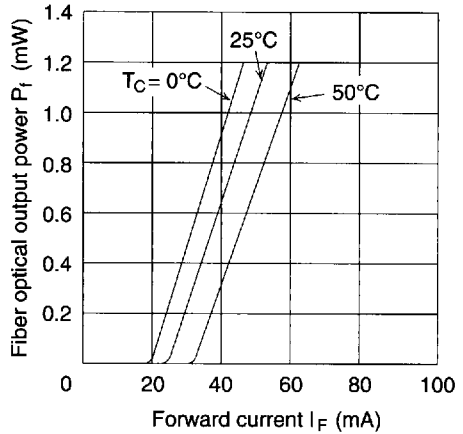

Forward Current vs. Forward Voltage

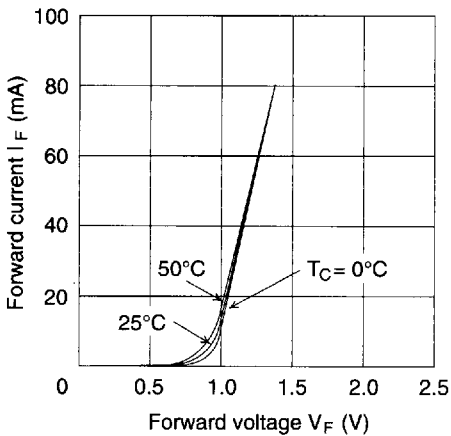


Lasing Wavelength (HL1321AC, HLP5400)

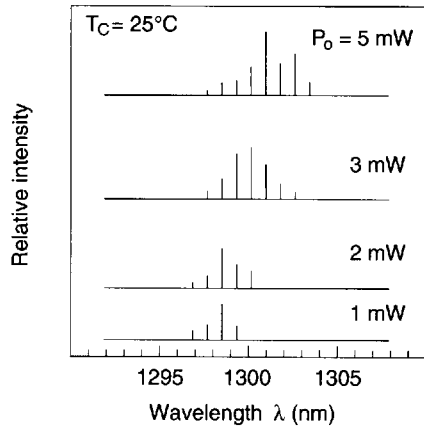


HL1321AC/BF/DL/DM, HLP5400

Typical Characteristic Curves (cont.)


Lasing Wavelength (HL1321BF/DL/DM)

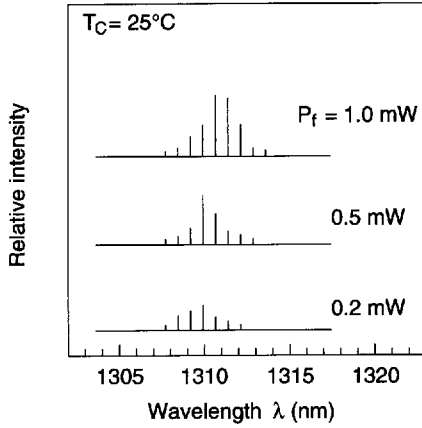

Lasing Wavelength Temperature Dependence (HL1321AC, HLP5400)

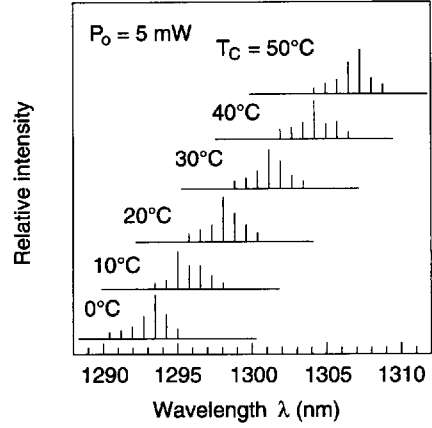


Lasing Wavelength Temperature Dependence (HL1321BF/DL/DM)

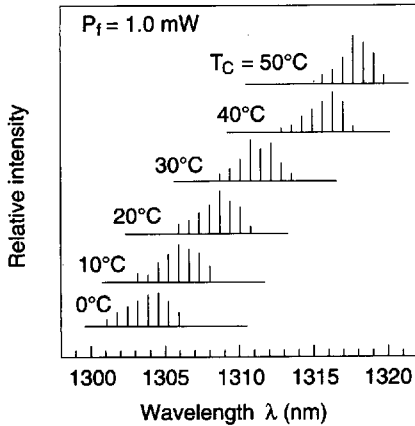


Typical Characteristic Curves (cont.)

1


Far Field Pattern (HL1321AC, HLP5400)

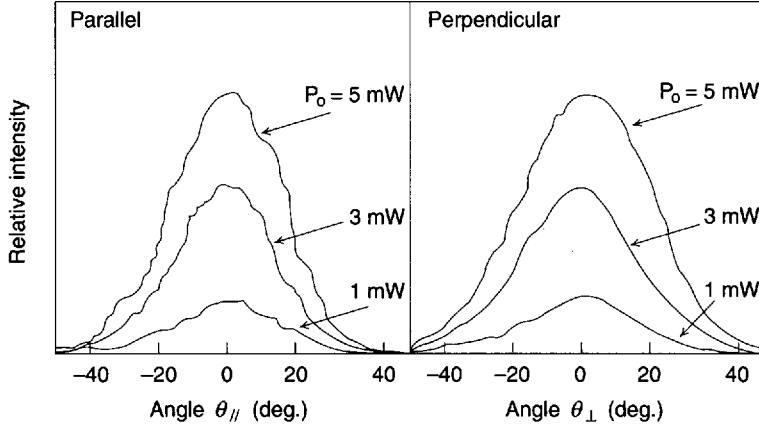

Pulse Response Characteristics

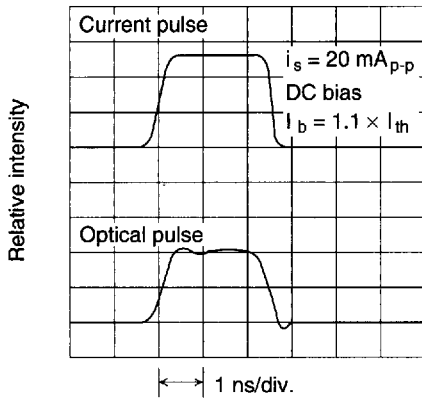


Threshold Current vs. Case Temperature

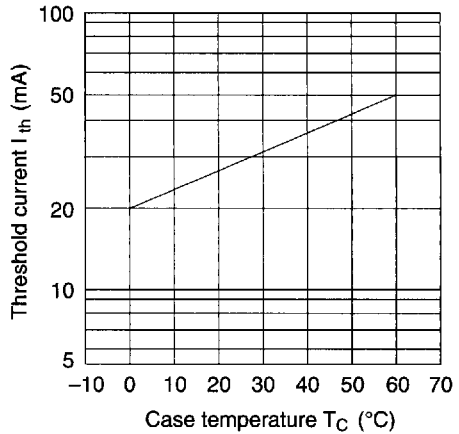


HL1321AC/BF/DL/DM, HLP5400

Typical Characteristic Curves (cont.)


Frequency Response Characteristics
(LD) (HL1321BF)

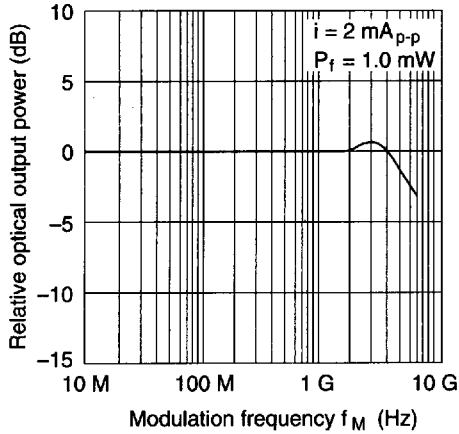


Frequency Response Characteristics
(LD) (HL1321AC, HLP5400)

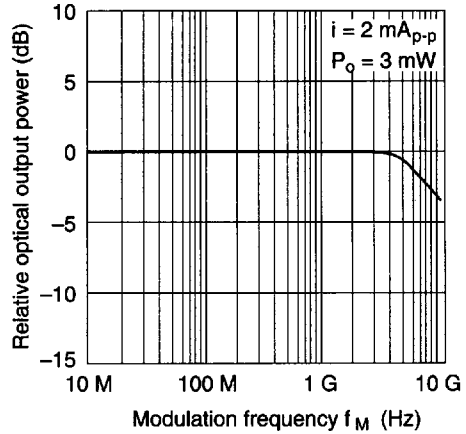

Frequency Response Characteristics
(LD) (HL1321DL)

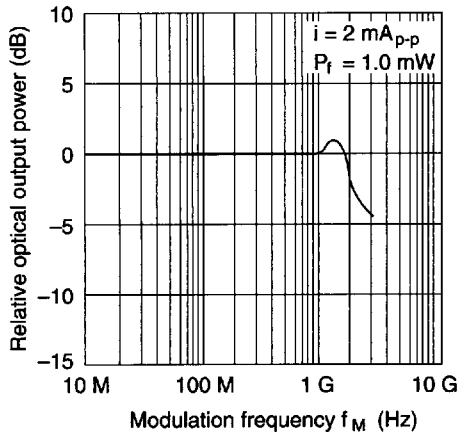

Frequency Response Characteristics
(LD) (HL1321DM)

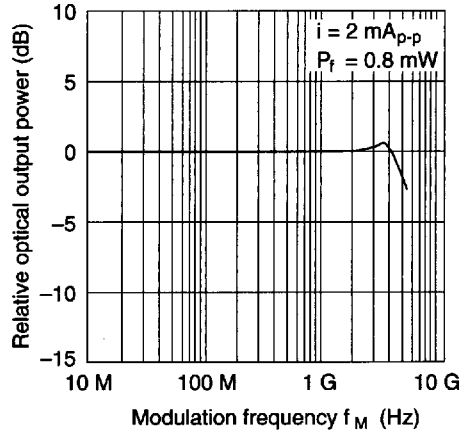

4496205 0014347 6T7

Part





HITACHI[®]

212 1

Hitachi America, Ltd. • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1835 • (415) 589-8300


Typical Characteristic Curves (cont.)

1

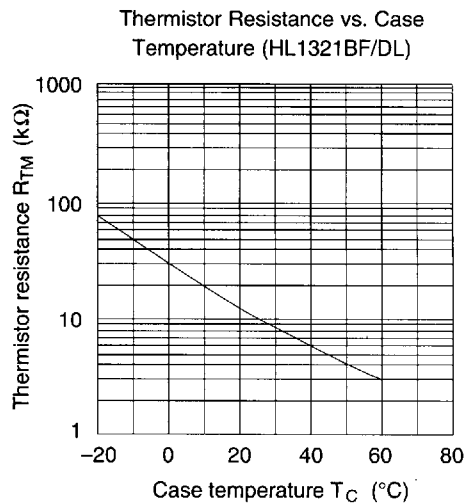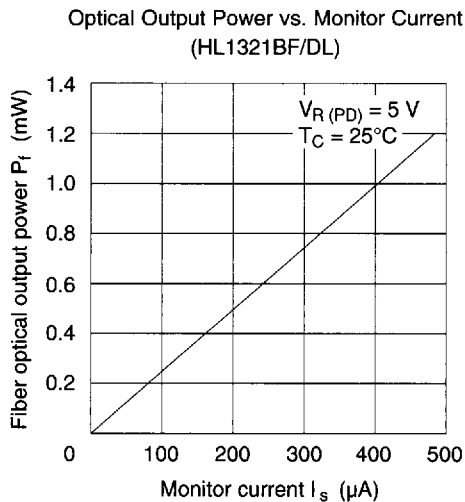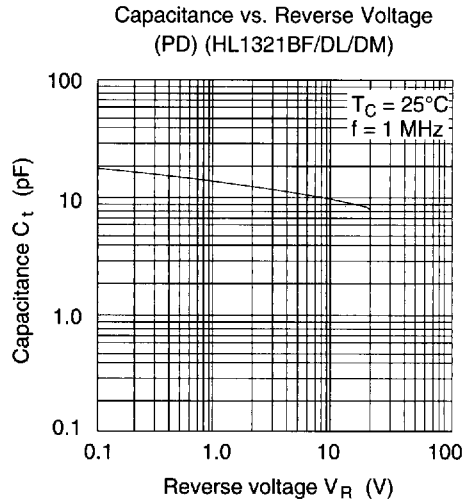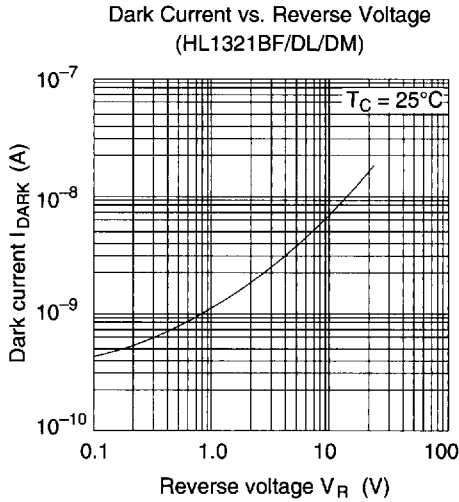

HL1321AC/BF/DL/DM, HLP5400

Typical Characteristic Curves (cont.)

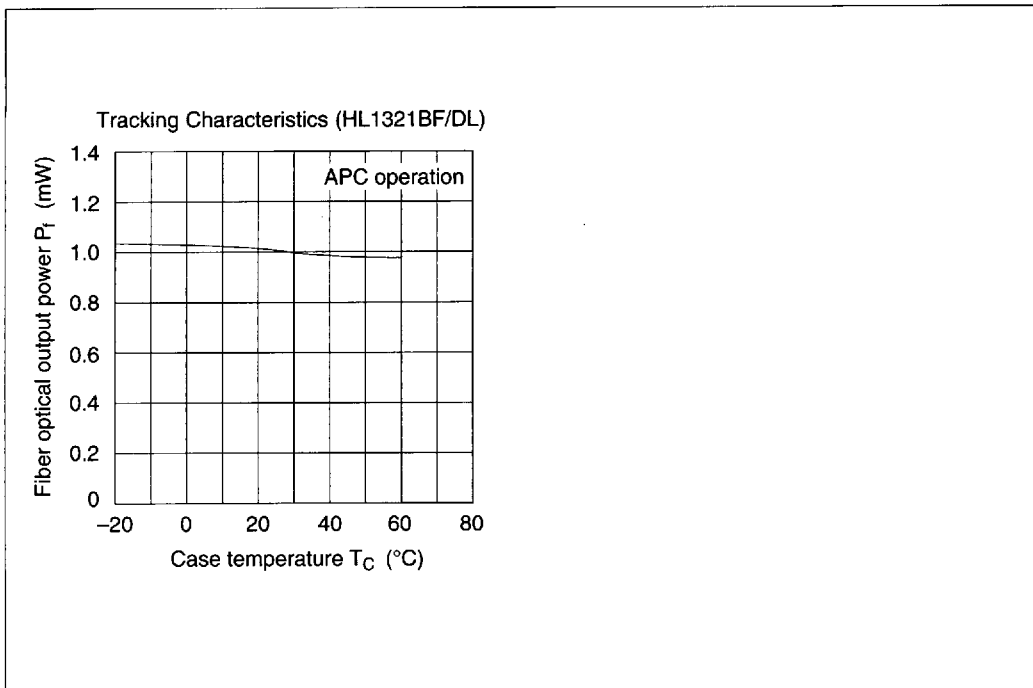

4496205 0014349 47T

Part

214 1

HITACHI[®]

Hitachi America, Ltd. • 2000 Sierra Point Pkwy. • Brisbane, CA 94005-1835 • (415) 589-8300