

Part/Keyword Search



Detailed Drawing



Printer Friendly Datasheet

RN9756 / SRN9756*


* Part number for additional environmental screening.

Performance Data


Frequency	1200.0 - 1700.0 MHz
Gain	27.0 dB Typical 25.0 dB Min
Noise Figure	1.0 dB Typical 1.8 dB Max
P _{1dB}	15.0 dBm Typical 14.0 dBm Min
3 rd Order Intercept	26.0 dBm Typical
2 nd Order Intercept	40.0 dBm Typical
VSWR	1.8/2.0 Input Typ/Max 1.8/2.0 Output Typ/Max
Reverse Isolation	-38.0 dB Typical -36.0 dB Min
Power Supply	5.0 Volts 60.0 mA
Operating Temperature	-55.0 - 85.0 °C

Package Drawing


SM-19 Surface Mount Package

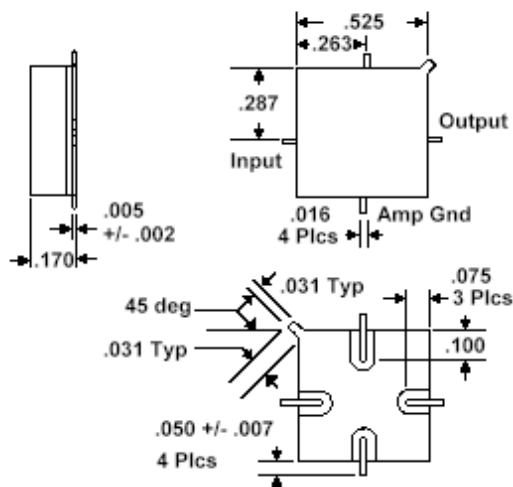

Gain

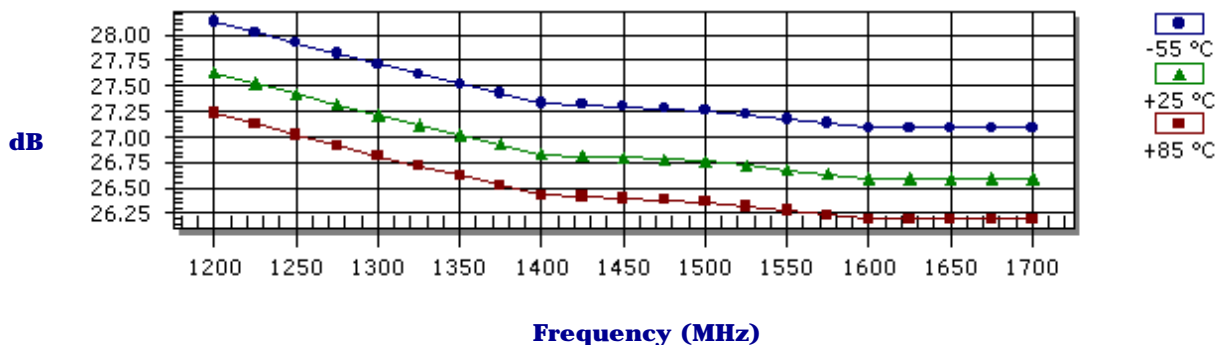

Noise Figure

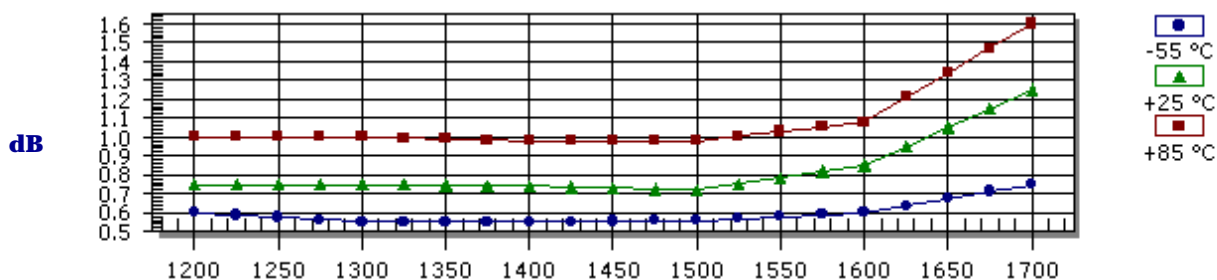

Products

Amplifiers

VCOs

Limiting Amplifiers

Switches

Linearizers

Limiters


Analog Attenuators

Digital Attenuators

Detectors


Frequency (MHz)

P_{1dB} Compression Point

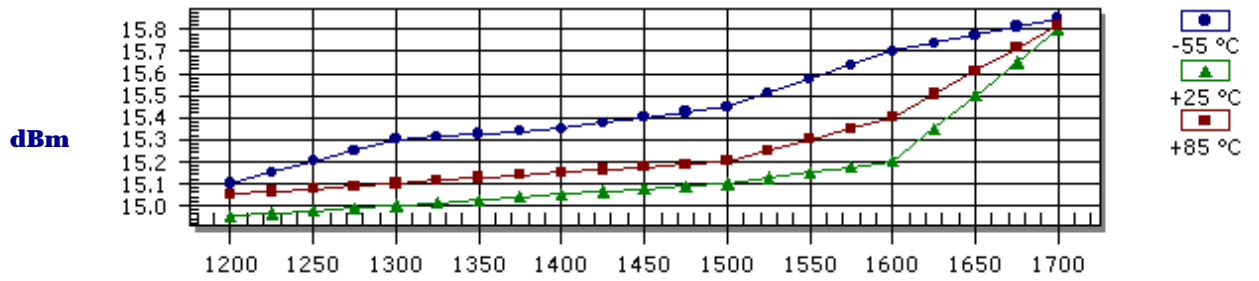


Frequency (MHz)

Reverse Isolation

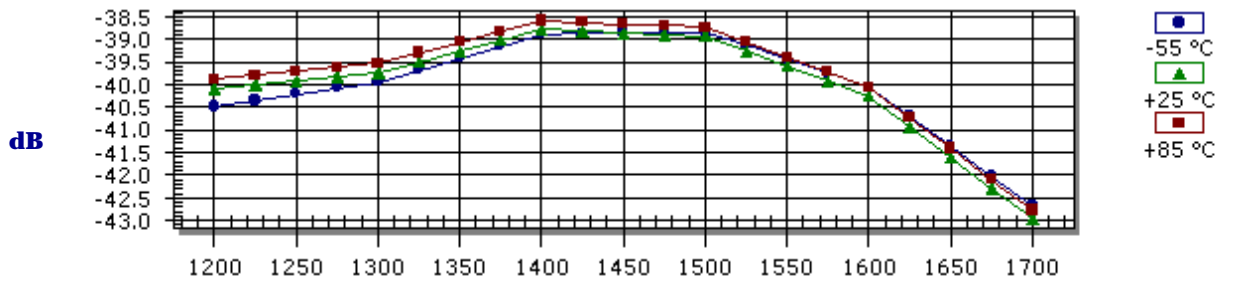


Frequency (MHz)

Input VSWR

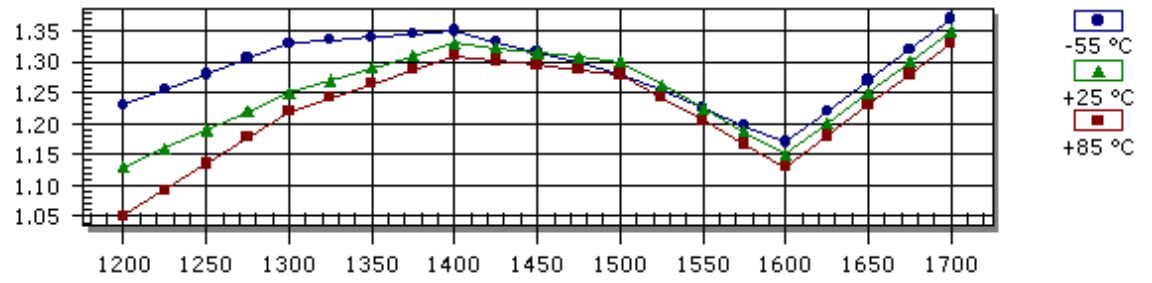

Frequency (MHz)

Output VSWR

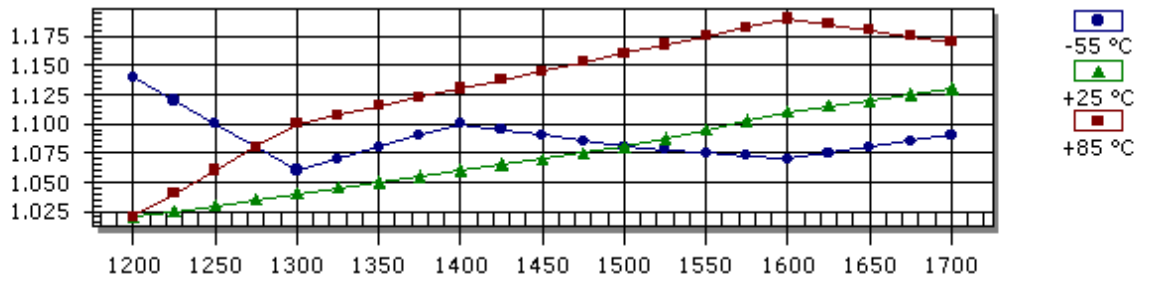

Frequency (MHz)

S-Parameters

Frequency	S11 Mag	S11 Ang	S21 Mag	S21 Ang	S12 Mag	S12 Ang	S22 Mag	S22 Ang
1200.0	0.060	121.00	24.080	-157.00	0.010	116.00	0.010	-42.00
1300.0	0.110	166.00	22.940	176.00	0.010	101.00	0.020	-99.00
1400.0	0.140	163.00	21.960	152.00	0.011	82.00	0.030	-130.00
1500.0	0.130	152.00	21.770	126.00	0.011	53.00	0.040	-153.00
1600.0	0.070	108.00	21.350	99.00	0.010	39.00	0.050	-170.00
1700.0	0.150	-25.00	21.350	69.00	0.007	10.00	0.060	170.00

Absolute Maximum Conditions

Maximum Operating Temperature	-55.0 - 100.0 °C	Maximum Storage Temperature	-62.0 - 125.0 °C
Maximum Case Temperature	125.0 °C	Maximum Supply Voltage	8.0 Volts
Continuous RF Input Power	13.0 dBm	Short Term RF Input Power (1 minute max)	50.0 mW
Maximum Peak Power (3 µsec max)	0.5 W		

Amplifonix | 2707 Black Lake Place | Philadelphia, PA 19154
Tel: 215.464.4000 | FAX: 215.464.4001 | Email: info@amplifonix.com

i2 Technologies US, Inc.

HTML Pages converted to PDF Document

This document contain component information from the manufacturer's website which are not available in a revision controlled document from the manufacturer. To facilitate the addition of these parts into the Electronics Database, we are converting the HTML pages related to that part, from the manufacturer's website into Adobe PDF format. The contents of this document is based on the information provided on the manufacturer's website, therefore the information may have been changed by the manufacturer since this was created.

