


## L 103 200 P.C.B. terminal blocks

► Expert Range - Axial screw clamp connection



Terminal blocks for axial screw clamp connection parallel to P.C.B.  
Single deck block, 2 pins per pole.

Pin 0.8 x 0.9 x 3.7 mm  
.031" x .035" x .145"  
P.C.B. thickness ≤ 2.4 mm .094"  
P.C.B. holes Ø 1.3 mm .051"  
Body : UL94 V0 - PC  
Grey □

**2.5 mm<sup>2</sup> - Spacing 7.62 mm .300"**


### Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0060	100	15.20	1SSA 103 202 R0100
3	0.0090	100	22.80	1SSA 103 203 R0100
4	0.0127	50	30.40	1SSA 103 204 R0100
5	0.0060	50	38.10	1SSA 103 205 R0100
6	0.0179	50	45.70	1SSA 103 206 R0100

Other numbers of poles, consult us


### Technical data

		IEC	UL	CSA
Wire size	Screw			
	Solid wire	0.12 - 2.5 mm <sup>2</sup>	22 - 14 AWG	22 - 14 AWG
	Stranded wire	0.12 - 2.5 mm <sup>2</sup>	22 - 14 AWG	22 - 14 AWG
	With ferrule			
Rated voltage		380 V	300 V	300 V
Rated current		15 A	15 A	20 A
Short-circuit current				
Rated wire size / Gauge		2.5 mm <sup>2</sup>	14 AWG	14 AWG
Storage temperature range		-20 ~ +80 °C		
Insulation resistance		≥ 10 <sup>9</sup> Ω		
Wire stripping length		8 mm / .315"		
Recommended screwdriver		3.5 mm / .138"		
Recommended torque		0.6 Nm / 5.3 lb.in		
Protection		IP 20 / NEMA 1		

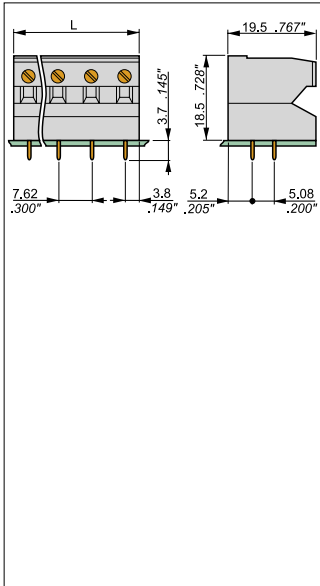

## L 103 300 P.C.B. terminal blocks

► Expert Range - Axial screw clamp connection



Terminal blocks for axial screw clamp connection perpendicular to P.C.B. Small size.  
Single deck block, 2 pins per pole.

Pin 0.8 x 0.9 x 3.7 mm  
.031" x .035" x .145"  
P.C.B. thickness ≤ 2.4 mm .094"  
P.C.B. holes Ø 1.3 mm .051"  
Body : UL94 V0 - PC  
Grey □

**2.5 mm<sup>2</sup> - Spacing 7.62 mm .300"**

### Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0043	100	15.20	1SSA 103 302 R0100
3	0.0065	50	22.80	1SSA 103 303 R0100
4	0.0087	50	30.40	1SSA 103 304 R0100
5	0.0108	50	38.10	1SSA 103 305 R0100
6	0.0130	50	45.70	1SSA 103 306 R0100

Other numbers of poles, consult us

### Technical data

		IEC	UL	CSA
Wire size	Screw			
	Solid wire	0.12 - 2.5 mm <sup>2</sup>	22 - 14 AWG	22 - 14 AWG
	Stranded wire	0.12 - 2.5 mm <sup>2</sup>	22 - 14 AWG	22 - 14 AWG
	With ferrule			
Rated voltage		380 V	300 V	300 V
Rated current		15 A	15 A	20 A
Short-circuit current				
Rated wire size / Gauge		2.5 mm <sup>2</sup>	14 AWG	14 AWG
Storage temperature range		-20 ~ +80 °C		
Insulation resistance		≥ 10 <sup>9</sup> Ω		
Wire stripping length		8 mm / .315"		
Recommended screwdriver		3.5 mm / .138"		
Recommended torque		0.6 Nm / 5.3 lb.in		
Protection		IP 20 / NEMA 1		

