

54F/74F544 Octal Registered Transceiver

General Description

The 'F544 octal transceiver contains two sets of D-type latches for temporary storage of data flowing in either direction. Separate Latch Enable and Output Enable inputs are provided for each register to permit independent control of inputting and outputting in either direction of data flow. The A outputs are guaranteed to sink 24 mA (20 mA Mil) while the B outputs are rated for 64 mA (48 mA Mil). The 'F544 inverts data in both directions.

Features

- 8-bit octal transceiver
- Back-to-back registers for storage
- Separate controls for data flow in each direction
- A outputs sink 24 mA (20 mA Mil), B outputs sink 64 mA (48 mA Mil)
- 300 mil slim PDIP


Ordering Code: See Section 11

Commercial	Military	Package Number	Package Description
74F544SPC		N24C	24-Lead (0.300" Wide) Molded Dual-In-Line
	54F544DM (Note 2)	J24A	24-Lead Ceramic Dual-In-Line
	54F544SDM (Note 2)	J24F	24-Lead (0.300" Wide) Ceramic Dual-In-Line
74F544SC (Note 1)		M24B	24-Lead (0.300" Wide) Molded Small Outline, JEDEC
74F544MSA (Note 1)		MSA24	24-Lead Molded Shrink Small Outline, EIAJ, Type II
	54F544FM (Note 2)	W24C	24-Lead Cerpack
	54F544LM (Note 2)	E28A	24-Lead Ceramic Leadless Chip Carrier, Type C


Note 1: Devices also available in 13" reel. Use suffix = SCX and MSAX.

Note 2: Military grade device with environmental and burn-in processing. Use suffix = DMOB, FMOB and LMOB

Logic Symbols




TL/F/9555-2

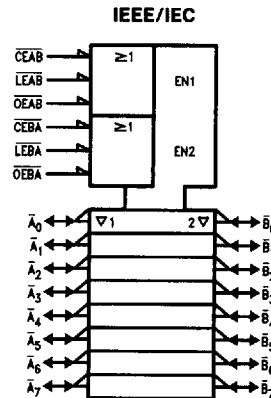


TL/F/9555-1

Connection Diagrams

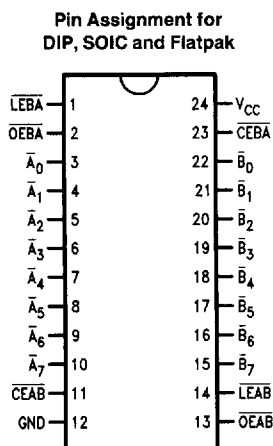

TL/F/9555-3

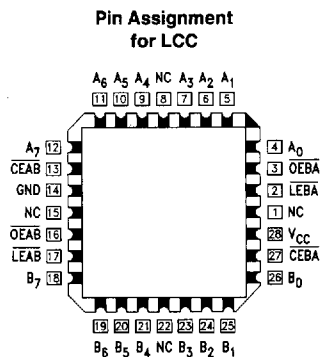

TL/F/9555-4

Unit Loading/Fan Out: See Section 2 for U.L. definitions

Pin Names	Description	54F/74F	
		U.L. HIGH/LOW	Input I _{IH} /I _{IL} Output I _{OH} /I _{OL}
OEAB	A-to-B Output Enable Input (Active LOW)	1.0/1.0	20 μA/ -0.6 mA
OEBA	B-to-A Output Enable Input (Active LOW)	1.0/1.0	20 μA/ -0.6 mA
CEAB	A-to-B Enable Input (Active LOW)	1.0/2.0	20 μA/ -1.2 mA
CEBA	B-to-A Enable Input (Active LOW)	1.0/2.0	20 μA/ -1.2 mA
LEAB	A-to-B Latch Enable Input (Active LOW)	1.0/1.0	20 μA/ -0.6 mA
LEBA	B-to-A Latch Enable Input (Active LOW)	1.0/1.0	20 μA/ -0.6 mA
A ₀ -A ₇	A-to-B Data Inputs or B-to-A TRI-STATE Outputs	3.5/1.083	70 μA/ -650 μA
B ₀ -B ₇	B-to-A Data Inputs or A-to-B TRI-STATE Outputs	150/40(33.3)	-3 mA/24 mA (20 mA)
		3.5/1.083	70 μA/ -650 μA
		600/106.6(80)	-12 mA/64 mA (48 mA)

Functional Description

The 'F544 contains two sets of eight D-type latches, with separate input and output controls for each set. For data flow from A to B, for example, the A-to-B Enable (CEAB) input must be LOW in order to enter data from A₀-A₇ or take data from B₀-B₇, as indicated in the Data I/O Control Table. With CEAB LOW, a LOW signal on the A-to-B Latch Enable (LEAB) input makes the A-to-B latches transparent; a subsequent LOW-to-HIGH transition of the LEAB signal puts the A latches in the storage mode and their outputs no longer change with the A inputs. With CEAB and OEAB both LOW, the TRI-STATE® B output buffers are active and reflect the data present at the output of the A latches. Control of data flow from B to A is similar, but using the CEBA, LEBA and OEBA inputs.

Data I/O Control Table

Inputs			Latch Status	Output Buffers
CEAB	LEAB	OEAB		
H	X	X	Latched	High Z
X	H	X	Latched	—
L	L	X	Transparent	—
X	X	H	—	High Z
L	X	L	—	Driving


H = HIGH Voltage Level

L = LOW Voltage Level

X = Immaterial

A-to-B data flow shown; B-to-A flow control is the same, except using CEBA, LEBA and OEBA

Logic Diagram

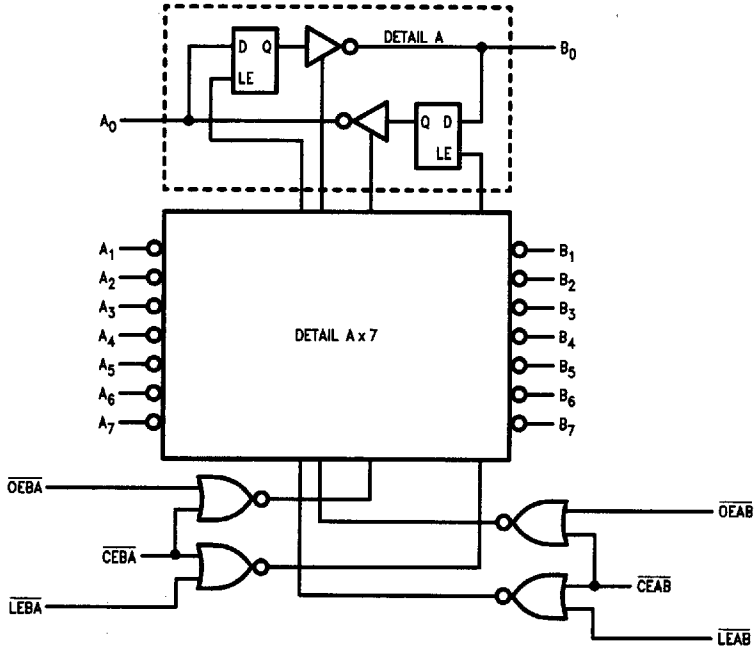

TL/F/9555-5

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays.

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Storage Temperature	-65°C to +150°C
Ambient Temperature under Bias	-55°C to +125°C
Junction Temperature under Bias	-55°C to +175°C
Plastic	-55°C to +150°C
V _{CC} Pin Potential to Ground Pin	-0.5V to +7.0V
Input Voltage (Note 2)	-0.5V to +7.0V
Input Current (Note 2)	-30 mA to +5.0 mA

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

Voltage Applied to Output in HIGH State (with V _{CC} = 0V)	
Standard Output	-0.5V to V _{CC}
TRI-STATE Output	-0.5V to +5.5V
Current Applied to Output in LOW State (Max)	twice the rated I _{OL} (mA)

Recommended Operating Conditions

Free Air Ambient Temperature	
Military	-55°C to +125°C
Commercial	0°C to +70°C
Supply Voltage	
Military	+4.5V to +5.5V
Commercial	+4.5V to +5.5V

DC Electrical Characteristics

Symbol	Parameter	54F/74F			Units	V _{CC}	Conditions
		Min	Typ	Max			
V _{IH}	Input HIGH Voltage	2.0			V		Recognized as a HIGH Signal
V _{IL}	Input LOW Voltage						Recognized as a LOW Signal
V _{CD}	Input Clamp Diode Voltage						
						Min	I _{IN} = -18 mA, (except \bar{A}_n, \bar{B}_n)
V _{OH}	Output HIGH Voltage	54F 10% V _{CC}	2.5				I _{OH} = -1 mA (\bar{A}_n)
		54F 10% V _{CC}	2.4				I _{OH} = -3 mA (\bar{A}_n, \bar{B}_n)
		54F 10% V _{CC}	2.0				I _{OH} = -12 mA (\bar{B}_n)
		74F 10% V _{CC}	2.5				I _{OH} = -1 mA (\bar{A}_n)
		74F 10% V _{CC}	2.4				I _{OH} = -3 mA (\bar{A}_n, \bar{B}_n)
		74F 10% V _{CC}	2.0				I _{OH} = -15 mA (\bar{B}_n)
		74F 5% V _{CC}	2.7				I _{OH} = -1 mA (\bar{A}_n)
		74F 5% V _{CC}	2.7				I _{OH} = -3 mA (\bar{A}_n, \bar{B}_n)
V _{OL}	Output LOW Voltage	54F 10% V _{CC}		0.5			I _{OL} = 20 mA (\bar{A}_n)
		54F 10% V _{CC}		0.55			I _{OL} = 48 mA (\bar{B}_n)
		74F 10% V _{CC}		0.5			I _{OL} = 24 mA (\bar{A}_n)
		74F 10% V _{CC}		0.55			I _{OL} = 64 mA (\bar{B}_n)
I _{IH}	Input HIGH Current	54F		20.0			V _{IN} = 2.7V (except \bar{A}_n, \bar{B}_n)
		74F		5.0	μA	Max	
I _{BVI}	Input HIGH Current Breakdown Test	54F		100			V _{IN} = 7.0V (except \bar{A}_n, \bar{B}_n)
		74F		7.0	μA	Max	
I _{BVIT}	Input HIGH Current Breakdown (I/O)	54F		1.0			V _{IN} = 5.5V (\bar{A}_n, \bar{B}_n)
		74F		0.5	mA	Max	
I _{CEX}	Output HIGH Leakage Current	54F		250			V _{OUT} = V _{CC} (\bar{A}_n, \bar{B}_n)
		74F		250	μA	Max	
V _{ID}	Input Leakage Test	74F	4.75				I _{ID} = 1.9 μA All Other Pins Grounded
I _{OD}	Output Leakage Circuit Current	74F		3.75			V _{IOD} = 150 mV All Other Pins Grounded
I _{IL}	Input LOW Current			-0.6			V _{IN} = 0.5V ($\overline{OEAB}, \overline{OEBA}$)
				-1.2	mA	Max	V _{IN} = 0.5V ($\overline{CEAB}, \overline{CEBA}$)
I _{IH} + I _{OZH}	Output Leakage Current			70			V _{OUT} = 2.7V (\bar{A}_n, \bar{B}_n)
I _{IL} + I _{OZL}	Output Leakage Current			-650			V _{OUT} = 0.5V (\bar{A}_n, \bar{B}_n)

DC Electrical Characteristics (Continued)

Symbol	Parameter	54F/74F			Units	V _{CC}	Conditions
		Min	Typ	Max			
I _{OS}	Output Short-Circuit Current	-60 -100		-150 -225	mA	Max	V _{OUT} = 0V (\bar{A}_n) V _{OUT} = 0V (\bar{B}_n)
I _{ZZ}	Bus Drainage Test			500	μA	0.0V	V _{OUT} = 5.25V (\bar{A}_n, \bar{B}_n)
I _{CCH}	Power Supply Current		70	105	mA	Max	V _O = HIGH
I _{CCL}	Power Supply Current		85	130	mA	Max	V _O = LOW
I _{CCZ}	Power Supply Current		83	125	mA	Max	V _O = HIGH Z

AC Electrical Characteristics: See Section 2 for Waveforms and Load Configurations

Symbol	Parameter	74F			54F		74F		Units	Fig No
		T _A = +25°C V _{CC} = +5.0V C _L = 50 pF			T _A , V _{CC} = Mil C _L = 50 pF		T _A , V _{CC} = Com C _L = 50 pF			
		Min	Typ	Max	Min	Max	Min	Max		
t _{PLH} t _{PHL}	Propagation Delay Transparent Mode \bar{A}_n to \bar{B}_n or \bar{B}_n to \bar{A}_n	3.0 3.0	7.0 5.0	9.5 6.5	3.0 2.5	12.0 8.5	3.0 3.0	10.5 7.5	ns	2-3
t _{PLH} t _{PHL}	Propagation Delay \bar{LEBA} to \bar{A}_n	6.0 4.0	10.0 7.0	13.0 9.5	6.0 4.0	18.0 11.5	6.0 4.0	14.5 10.5	ns	2-3
t _{PLH} t _{PHL}	Propagation Delay \bar{LEAB} to \bar{B}_n	6.0 4.0	10.0 7.0	13.0 9.5	6.0 4.0	18.0 11.5	6.0 4.0	14.5 10.5	ns	2-3
t _{PZH} t _{PZL}	Output Enable Time \bar{OEBA} or \bar{OEAB} to \bar{A}_n or \bar{B}_n \bar{CEBA} or \bar{CEAB} to \bar{A}_n or \bar{B}_n	3.0 4.0	7.0 7.5	9.0 10.5	3.0 4.0	11.0 13.0	3.0 4.0	10.0 12.0	ns	2-5
t _{PHZ} t _{PLZ}	Output Disable Time \bar{OEBA} or \bar{OEAB} to \bar{A}_n or \bar{B}_n \bar{CEBA} or \bar{CEAB} to \bar{A}_n or \bar{B}_n	1.0 2.5	6.0 5.5	8.0 10.5	2.0 2.0	10.0 9.5	1.0 2.5	9.0 11.5		

AC Operating Requirements: See Section 2 for Waveforms

Symbol	Parameter	74F		54F		74F		Units	Fig No
		T _A = +25°C V _{CC} = +5.0V		T _A , V _{CC} = Mil		T _A , V _{CC} = Com			
		Min	Max	Min	Max	Min	Max		
t _s (H) t _s (L)	Setup Time, HIGH or LOW \bar{A}_n or \bar{B}_n to \bar{LEBA} or \bar{LEAB}	3.0 3.0		3.0 3.0		3.0 3.0		ns	2-6
t _h (H) t _h (L)	Hold Time, HIGH or LOW \bar{A}_n or \bar{B}_n to \bar{LEBA} or \bar{LEAB}	3.0 3.0		3.0 3.0		3.0 3.0			
t _w (L)	Latch Enable, B to A Pulse Width, LOW	6.0		9.0		7.5		ns	2-4