

This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	12/16/08	AM

ENGINEERING DATA

ELECTRICAL:

FREQUENCY RANGE: DC to 33 GHz
 VSWR MAX: 1.15:1

MECHANICAL:

INTERFACE PER IEEE 287

MATERIAL:


HOUSING: STAINLESS STEEL
 CONTACTS: BERYLLIUM COPPER
 SUPPORT BEAD: PEI



FINISH:

HOUSING: PASSIVATED
 CONTACTS: GOLD PLATED

NOTES:

- ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

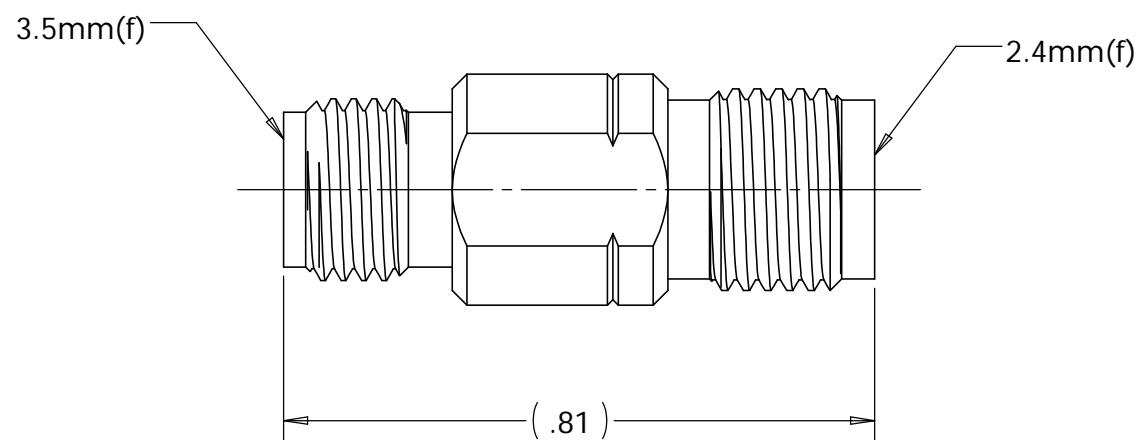

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 12/08/08	 TRU CORPORATION 245 LYNNFIELD STREET, PEABODY, MA 01960 <i>The Custom Interconnect Leader™</i>	
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 63/√	ENG APPR. AM	DATE 12/09/08		TITLE: CONNECTOR, COAXIAL 3.5mm(f) to 2.4mm(f) ADAPTER
MFG APPR.		DATE	SIZE B	DWG. NO. TRU-11204	REV -
OTHER APPR.		DATE	THIRD ANGLE PROJECTION 		
COMMENTS:		CAGE CODE: 92180		SCALE: 4:1	SHEET 1 OF 1