




This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.



Customer drawing

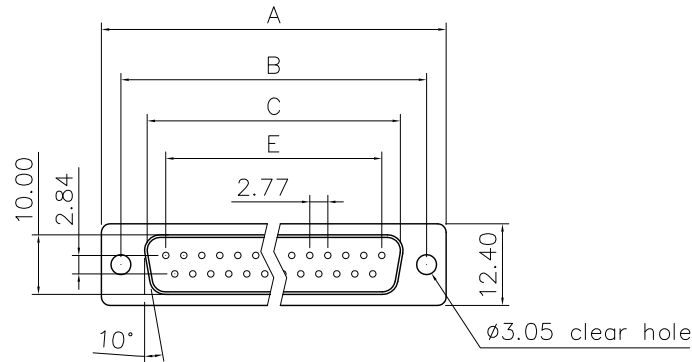

Cover

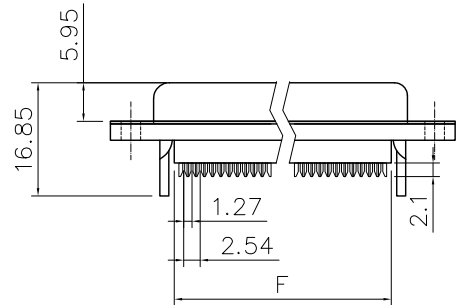

With Insulator Support

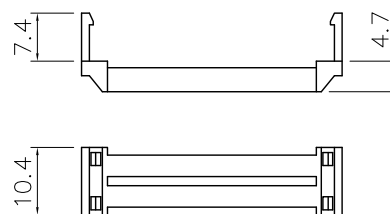

Strain Relief

Dimensions

Positions	A	B	C	E	F
9	30.50	25.00	18.05	11.08	13.10
15	39.00	33.32	26.35	19.39	20.70
25	53.08	47.04	40.95	33.24	33.68
37	69.25	63.50	55.60	49.86	50.30

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	09/01/08	IP
2	HK--	Update the Drawing	01/15/14	IP


D-SUB TECHNICAL DATA

BODY : Glass-Filled Thermoplastic PBT, UL94V-0
CONTACTS : Copper alloy
Gold flash over 50u" nickel on mating area
100u" tin over 50u" nickel on solder area
ELECTRICAL : Voltage rating 250 VAC/Rms 60Hz
Current Rating :3 AMP
Withstanding Voltage >1000 VAC Rms
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max

PRODUCT CODE

L 17D X FR B XX P

L: RoHS Compliance	Contact type: P=Pin
17D: Flash gold contact plating	Configuration: 09,15,25,37
Shell Size:E,A,B,C	Type: B=All plastic
Flat ribbon cable type	

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL	DATE
U.S.	METRIC	DRAWN	DATE
.X +/-	0.50	Felix Liu	01/15/14
.XX +/-	0.30	CHECKED	Tony Tang
.XXX +/-	0.20	CHECKED	01/15/14
FRACTIONS +/-			
ANGLES +/-	5°		
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :	
REMOVE SHARP EDGES		ANGLE OF PROJECTION	
DIMENSIONS			
U.S.	INCHES		
METRIC	MM		

Amphenol		Amphenol East Asia Limited	
TITLE		IDC Flat cable,DFR series	
SIZE	DRAWING NO.	REV.	
A4	C L17DXFRBXXP	2	
SCALE	NONE	SHEET 1	OF 1