
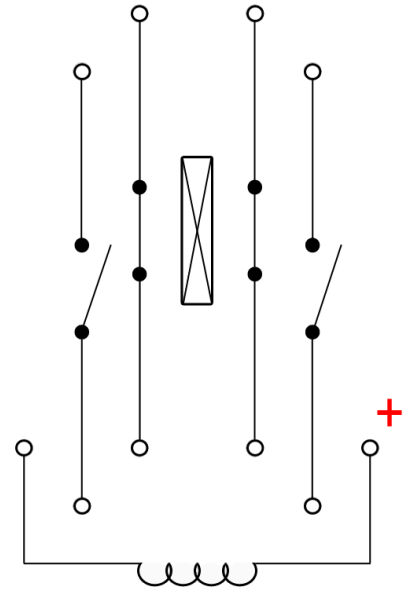


Part Number: CUPC2A2B106
Magnetic Reed Relay - Two Form A - Two Form B - 6 VDC
Product Data Sheet

DIMENSIONS

CIRCUIT DIAGRAM

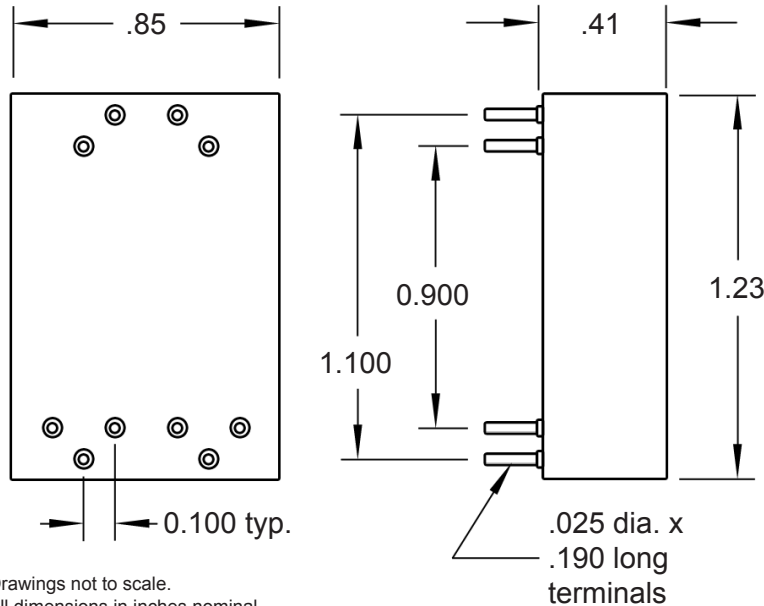

Drawings not to scale.
 All dimensions in inches nominal.

TERMINALS / TOLERANCE

FEATURES

Diameter: 0.025
 Length: 0.190

Tolerance: .XXX = $\pm .010$
 .XX = $\pm .020$

- Resistant to Ambient Environmental Conditions
- Material : Plastic
- Mechanical Stress Resistant
- Antivibration Feature
- Internal Magnetic Shield

SPECIFICATION

Maximum Switching Power	VA / Watts	10
Maximum Switching Current	Amps AC/DC	0.75
Maximum Switching Voltage	Volts AC/DC	200
Breakdown Voltage	Volts AC	300
Coil Resistance (+/- 10% @25°C)	Ohms	75
Nominal Coil Voltage	VDC	6
Maximum Coil Voltage	VDC	7
Pull-in Voltage MAX	VDC	4.2
Drop-out Voltage MIN	VDC	0.4
Dielectric	coil / case	N/A
	coil / cont	2000 VAC
	cont / cont	300 VAC

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405