
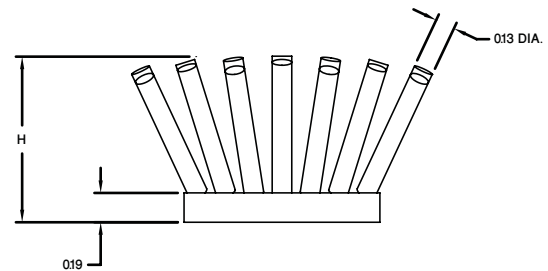


Flared Aluminum Pin Fin Heat Sinks

- Designed for natural convection cooling
- Generate exceptional cooling power
- Forged from highly conductive aluminum
- Lapped to achieve exceptional base surface finish and flatness
- Overall height can be customized to any dimension between 0.7" to 1.5"
- Single or multiple pins can be removed to meet application-specific requirements
- Secondary operations available (e.g. through holes, threads)
- Plating options: Anodize (black/clear), Electroless Nickel
- RoHS compliant

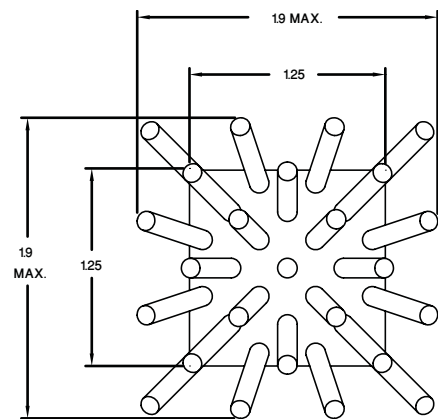

P/N	Length in(mm)	Width in(mm)	Height in(mm)	Weight lbs(g)	# of pins	TR (°C/W) Natural Convection (0 LFM)
3-121207G	1.25(31.8)	1.25(31.8)	0.70(17.8)	0.0438(19.9)	25	13.72
3-121208G	1.25(31.8)	1.25(31.8)	0.80(20.3)	0.0468(21.2)	25	12.41
3-121209G	1.25(31.8)	1.25(31.8)	0.90(22.9)	0.0498(22.6)	25	11.36
3-121210G	1.25(31.8)	1.25(31.8)	1.00(25.4)	0.0528(23.9)	25	10.50
3-121212G	1.25(31.8)	1.25(31.8)	1.20(30.5)	0.0587(26.6)	25	9.16
3-121215G	1.25(31.8)	1.25(31.8)	1.50(38.1)	0.0677(30.7)	25	7.75

Please see Disclaimer at www.coolinnovations.com