

Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance *	33		mH
DCR		3.5	Ω
Current		0.3	A _{RMS}
Leakage Inductance *		0.9	μ H
SRF	150		kHz

Rated Voltage 250 VAC

Hipot (Isolation) 2500 VAC


Insulation Resistance 100M Ω

Temperature Rise 60°C Max.


Operating Temperature Range -25°C to +60°C

* Inductance tested at 100mV_{RMS} and 100 kHz

Schematic Diagram

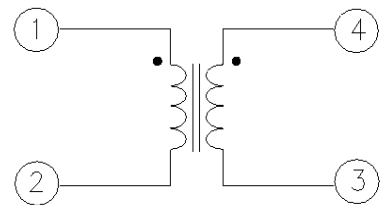

Physical Dimensions
inches (mm)

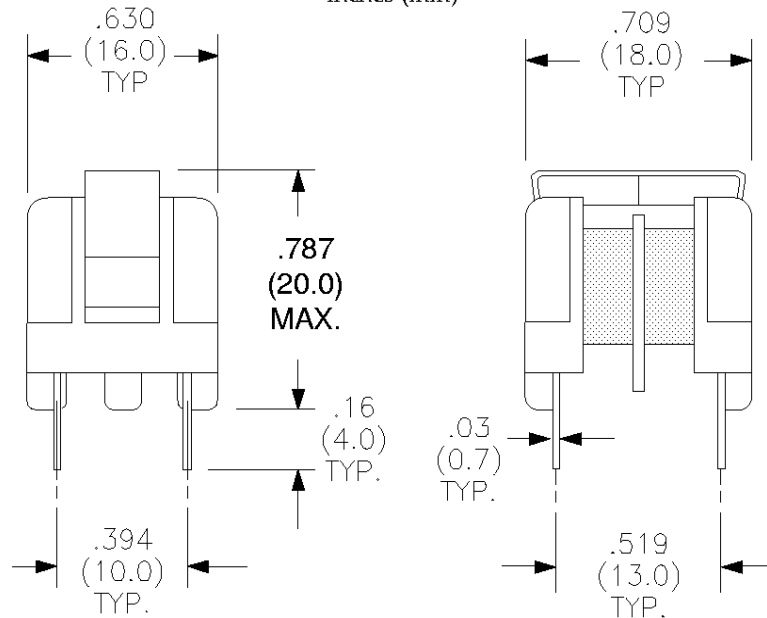

RHOMBUS P/N: **L-287**

CUST P/N:

NAME:

DATE: **10/21/97**

SHEET: 1 OF 1