

TLP1032(F), TLP1033A(F)

Domestic electrical appliances such as VTRs and CD players

Office equipment such as photocopiers, printers and fax machines


Vending machines

Position detectors

The TLP1032(F)/TLP1033A(F) is a high-withstanding-voltage photo-interrupter for digital output. The device combines a high-optical-output GaAs infrared LED with a high-sensitivity, high-gain Si photo-IC. The photo-IC, which supports a wide range of systems (3.3 V to 12 V), enables the device to consume less power than conventional devices. The device also features a narrow slit width and high resolution.

The short lead package allows automatic mounting.

- Designed for direct mounting on printed circuit boards (positioning pins included)
- The short lead package allows automatic mounting:
 - Lead length of 3.4 ± 0.3 mm
- Permissible board thickness: 1.6 mm or less
- Gap: 5 mm
- Resolution: Slit width of 0.5 mm
- Digital output (open-collector)
 - TLP1032(F) : Low-level output at shielding
 - TLP1033A(F): High-level output at shielding
- Direct connection to logic IC
- Power supply voltage: $V_{CC} = 2.7 \text{ V} \sim 15 \text{ V}$
- High-speed response
- Detector impermeable to visible light
- Package material: Polybutylene-terephthalate (UL94V-0, black)

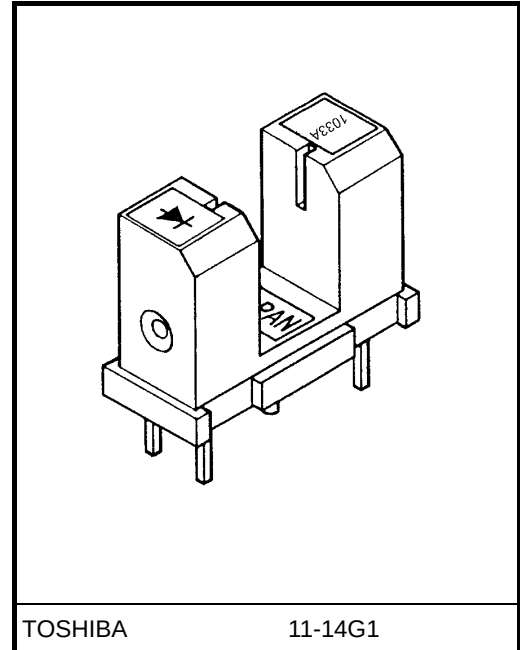

Weight: 0.6 g (typ.)

Absolute Maximum Ratings (Ta = 25°C)

Characteristic			Symbol	Rating	Unit
LED	Forward current		I _F	50	mA
	Forward current derating	(Ta > 25°C)	ΔI _F /°C	−0.33	mA/°C
		(Ta > 85°C)		−2	
	Reverse voltage		V _R	5	V
Detector	Supply voltage		V _{CC}	15	V
	Output voltage		V _O	15	V
	Low-level output current (Ta = T _{opr})		I _{OL}	16	mA
Operating temperature			T _{opr}	−30~95	°C
Storage temperature			T _{stg}	−40~100	°C
Soldering temperature (5 s) (Note 1)			T _{sol}	260	°C

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.

Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

Note 1: Soldering is performed 1.5 mm from the bottom of the package.

Operating Ranges

Characteristic	Symbol	Min	Typ.	Max	Unit
LED forward current	I_F	8 (Note 2)	—	20	mA
Supply voltage	V_{CC}	2.7	3.3	13.2	V
Output voltage	V_O	—	—	13.2	V
Low-level output current	I_{OL}	—	—	16	mA
Operating temperature	T _{opr}	-25	—	95	°C

Note 2: The value 8 mA allows for a 50% optical fluctuation in the LED. The initial value of the threshold input current is 4 mA or less.

Electrical and Optical Characteristics

(unless otherwise specified: Ta = -30~95°C, VCC = 2.7~15 V)


Characteristic		Symbol	Test Conditions		Min	Typ.	Max	Unit
LED	Forward voltage	V _F	I _F = 10 mA, Ta = 25°C		1.00	1.15	1.30	V
	Reverse current	I _R	V _R = 5 V, Ta = 25°C		—	—	10	μA
	Peak emission wavelength	λ _P	I _F = 15 mA, Ta = 25°C		—	940	—	nm
Detector	Operating supply voltage	V _{CC}	—		2.7	—	15	V
	Low-level supply current	I _{CCL}	I _F = *1, Ta = 25°C		—	—	1.6	mA
			I _F = *1		—	—	2.0	
	High-level supply current	I _{CCH}	I _F = *2, Ta = 25°C		—	—	1.1	mA
			I _F = *2		—	—	1.2	
	Low-level output voltage	V _{OL}	I _{OL} = 16 mA, I _F = *1 Ta = 25°C		—	0.05	0.3	V
			I _{OL} = 16 mA, I _F = *1		—	—	0.4	
High-level output current	I _{OH}	I _F = *2, V _O = 15 V		—	—	6.3	μA	
Peak sensitivity wavelength	λ _P	Ta = 25°C		—	900	—	nm	
Propagation characteristics	L → H threshold input current	I _{FLH}	Ta = 25°C	TLP1032(F)	—	—	3	mA
					—	—	4	
	H → L threshold input current	I _{FHL}	Ta = 25°C	TLP1033A(F)	—	—	3	mA
					—	—	4	
	Hysteresis	I _{FHL} /I _{FLH}	—	TLP1032(F)	—	0.67	—	—
				TLP1033A(F)	—	1.5	—	
	Propagation delay time (L → H)	t _{pLH}	V _{CC} = 3.3 V I _F = 15 mA R _L = 10 kΩ Ta = 25°C	TLP1032(F)	—	—	9	μs
				TLP1033A(F)	—	—	15	
	Propagation delay time (H → L)	t _{pHL}		TLP1032(F)	—	—	15	
				TLP1033A(F)	—	—	9	
	Rise time	t _r		TLP1032(F)	—	0.02	0.5	
				TLP1033A(F)	—	0.8	3	
	Fall time	t _f		TLP1032(F)	—	0.8	3	
				TLP1033A(F)	—	0.02	0.5	

*1 0 mA for the TLP1032(F); 15 mA for the TLP1033A(F).


*2 15 mA for the TLP1032(F); 0 mA for the TLP1033A(F).

Note 3: The switching time measurement circuit and waveform are as follows:


TLP1032(F)

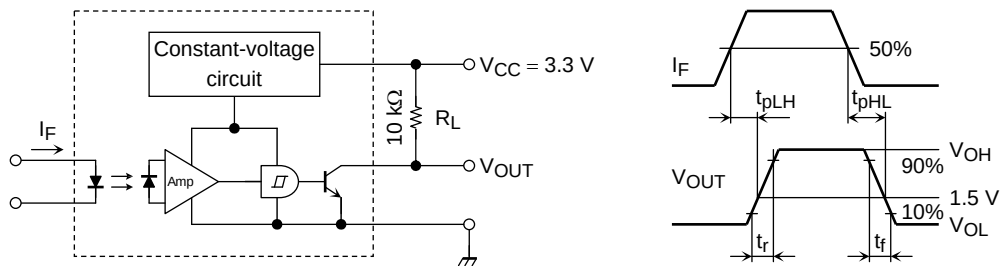

TLP1033A(F)

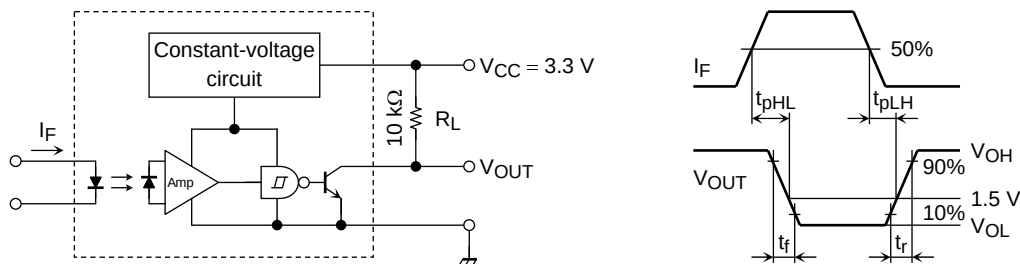

Markings

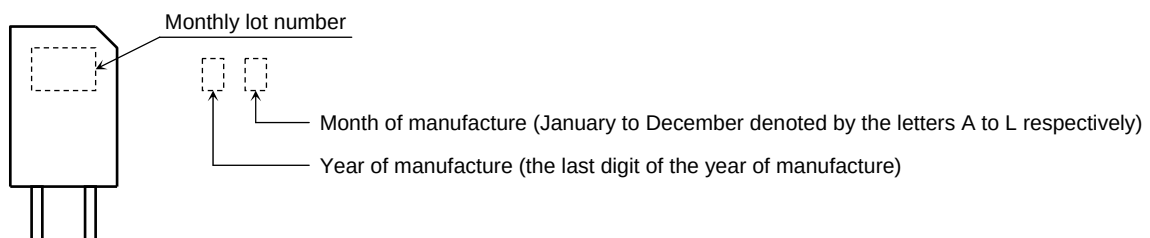

Precautions


- When removing flux with chemicals after soldering, clean only the soldered part of the leads. Do not immerse the entire package in the cleaning solvent. Chemical residue on the LED emitter or the photodetector inside the photo-IC case may adversely affect the optical characteristics of the device and may drastically reduce the threshold input current.
- The case is made of polybutylene-terephthalate. Oil or chemicals may cause the package to melt or crack. Care should be taken regarding the environment in which the device is to be installed.
- Mount the device on a level surface.
- Output fluctuates for 100 μs after power-on while the internal circuit stabilizes.
- To stabilize the power line, insert a bypass capacitor of up to 0.01 μF between V_{CC} and GND, close to the device.
- The threshold input current increases over time due to current flowing in the infrared LED. The design of circuits that are to incorporate the device must take into account the change in threshold input current over time. The change in threshold input current is equal to the reciprocal of the change in LED infrared optical output.

$$\frac{I_{FHL}(t)}{I_{FHL}(0)} = \left(\frac{P_O(t)}{P_O(0)} \right)^{-1}$$

- Choose a high-quality shutter material that is impermeable to light. If the material is of inferior quality, light from the LED may pass through the shutter, causing the device to malfunction.

Package Dimensions: TOSHIBA 11-14G1


Unit: mm

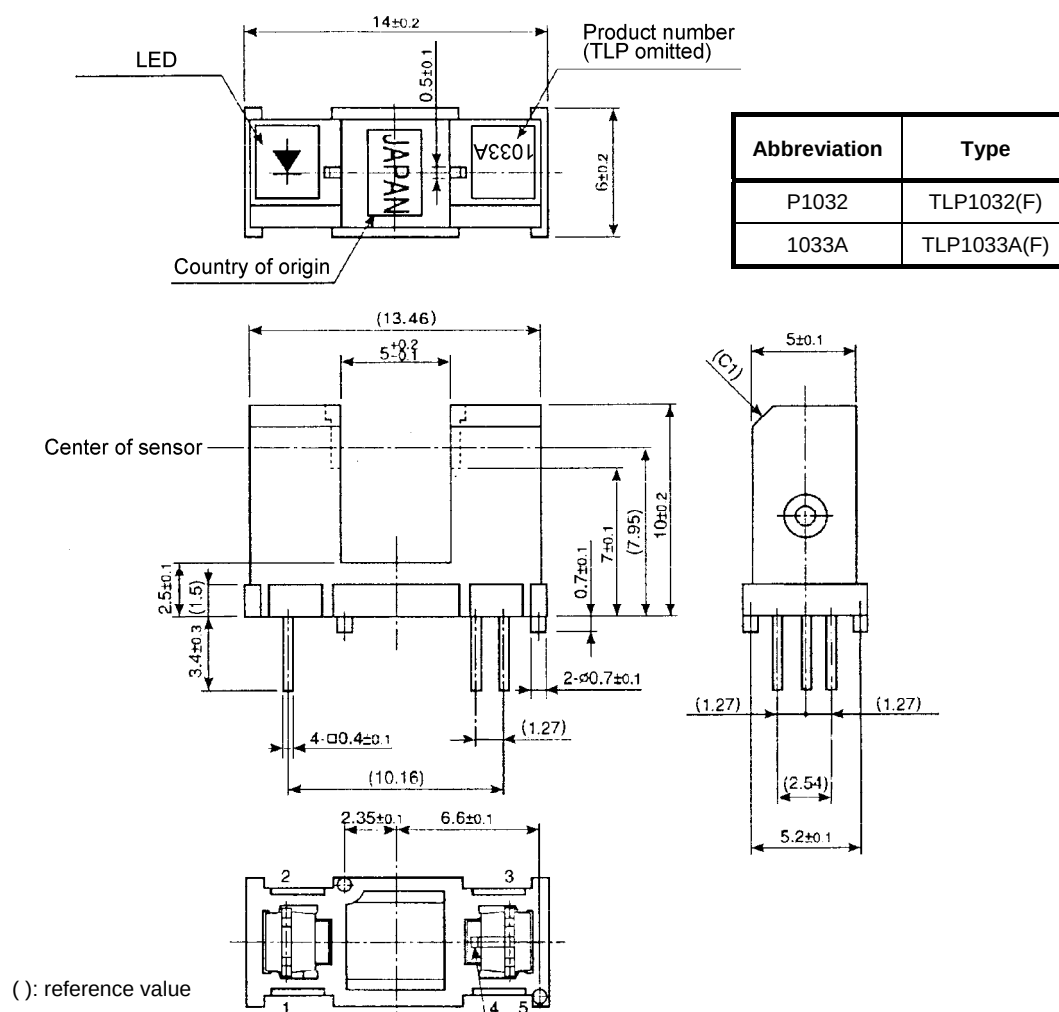


Weight: 0.6 g (typ.)

Pin Connections







TLP1032(F)




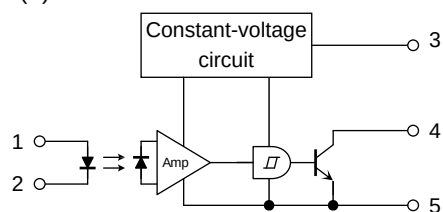


TLP1033A(F)

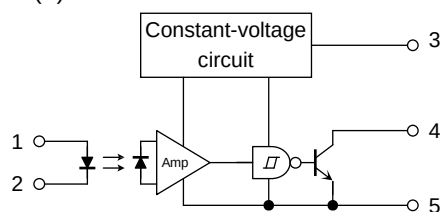


- 1: Anode
- 2: Cathode
- 3: VCC
- 4: OUT
- 5: GND

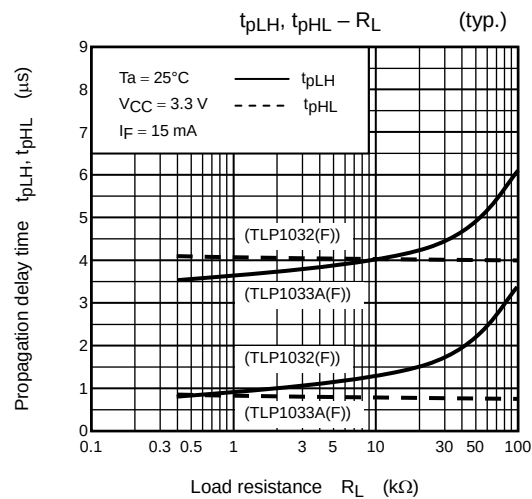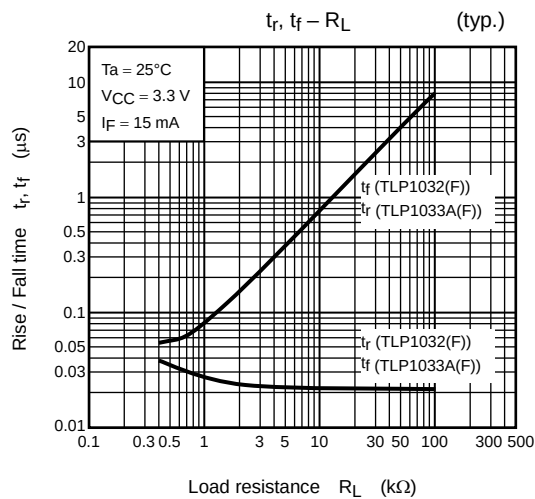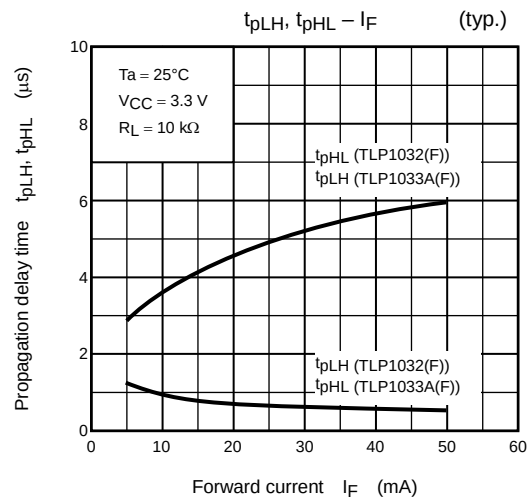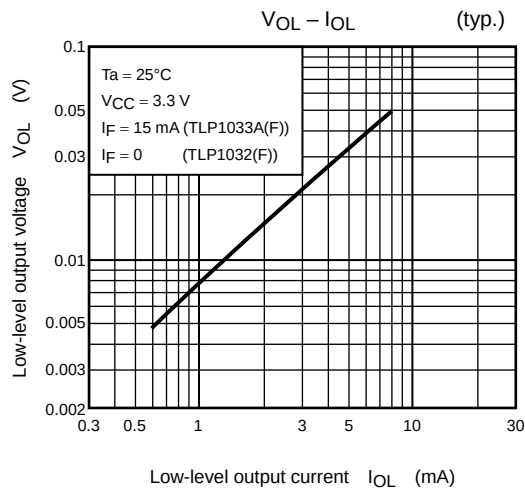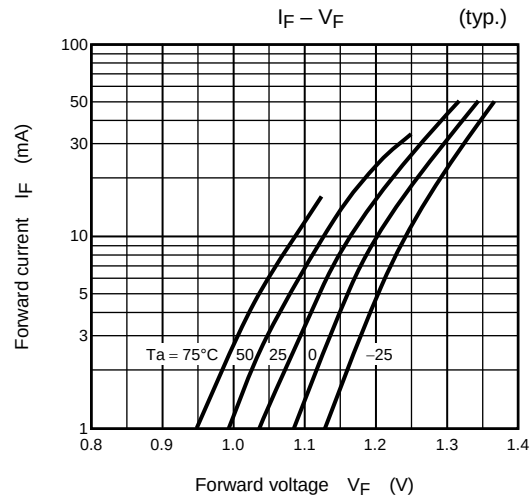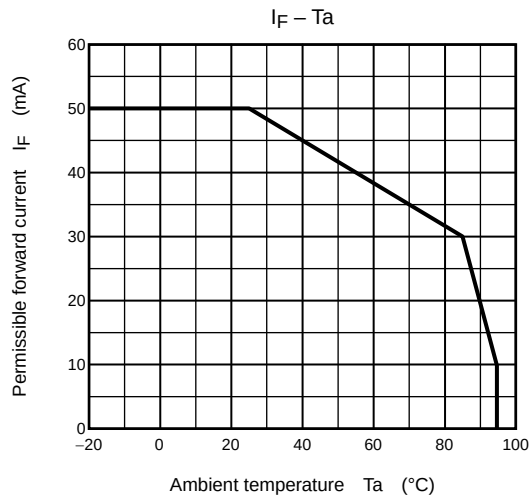

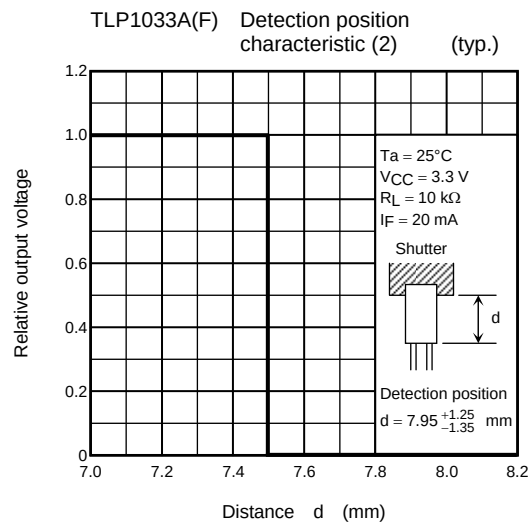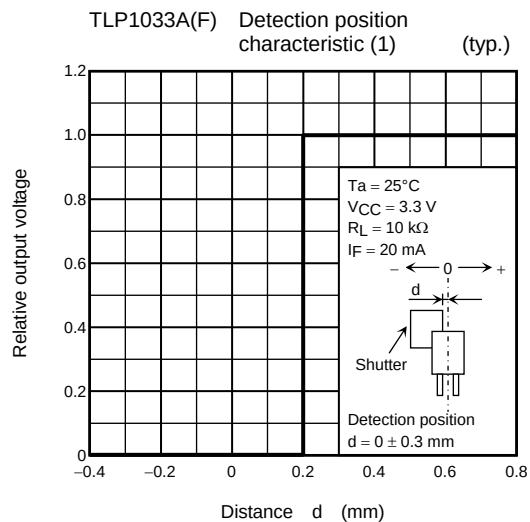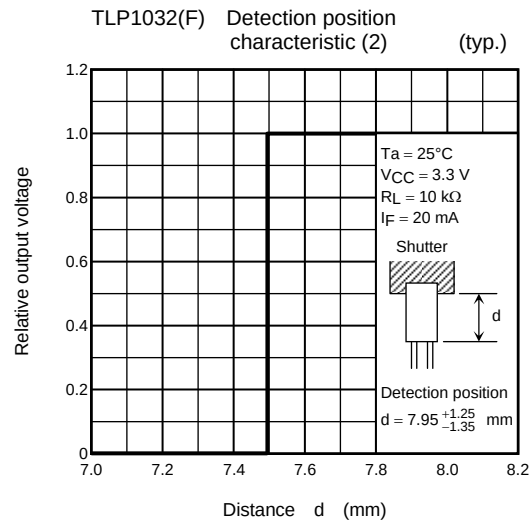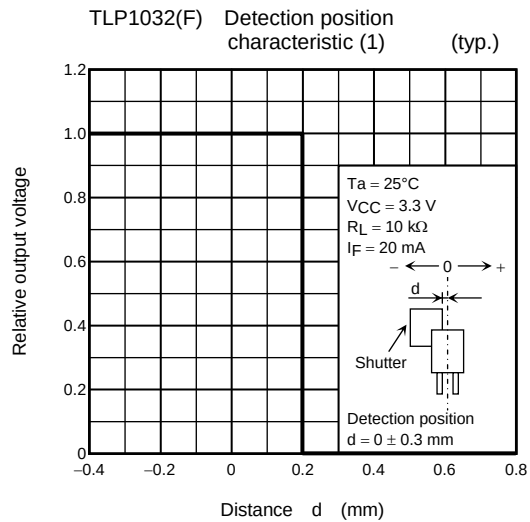

Relative Positioning of Shutter and Device

For normal operation, position the shutter and the device as shown in the figure below. Take into account the detection direction characteristic and switching time of the device in determining the shutter slit width and pitch.

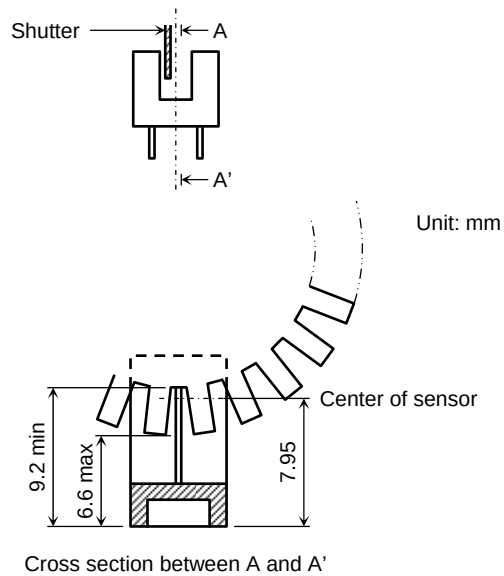

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before creating and producing designs and using, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application that Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact ("Unintended Use"). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- GaAs (Gallium Arsenide) is used in Product. GaAs is harmful to humans if consumed or absorbed, whether in the form of dust or vapor. Handle with care and do not break, cut, crush, grind, dissolve chemically or otherwise expose GaAs in Product.
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.