


Model 150019



Mixers Image Rejection

Applications

- Wideband Sweeping Receivers
- Spectrum Analyzers
- Surveillance Receivers
- Wideband Test Instrumentation
- Starved LO Systems

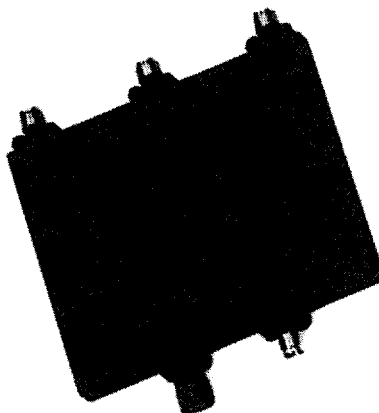

Features

- 30 to 240 MHz IF Available
- Military Grade
- Excellent Image Suppression
- Low Conversion Loss
- Stainless Steel Connectors
- Biased Versions Available

Electrical Specifications

Model Number	Frequency GHz	Isolation LO-RF dB Min/Typ	Convers. Loss dB Max/Typ
150019-60	12.4-18.0	11/17	10.5/8.5
IF Input ¹ MHz	RF VSWR Max/Typ: 1	LO VSWR Max/Typ :1	Image Reject @ IF dB Max/Typ
40-80	2.5/1.7	3.0/1.8	13/18

Notes: Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications. **Electrical and Mechanical Specifications subject to change without notice.** ¹ Specifications are for 60 MHz IF center frequency. Other IF center frequencies are available from 30 to 240 MHz. LO Power: +7 dBm typical. Biased versions also available.

Outline Drawing

