


SPECIFICATIONS

Rating: 100V AC 1A Max Or 12V DC 2A Max
 Insulation Resistance: 50Megohms Min At 500V DC
 Dielectric Strength: 500V AC/1 Minute
 Cover: EVA+PE-LL
 Shell: ABS(PA-757)
 Metal Shield: Brass Nickel Plated
 Housing: PA6+GF
 Contact: Brass Silver Plated
 RoHS Compliant

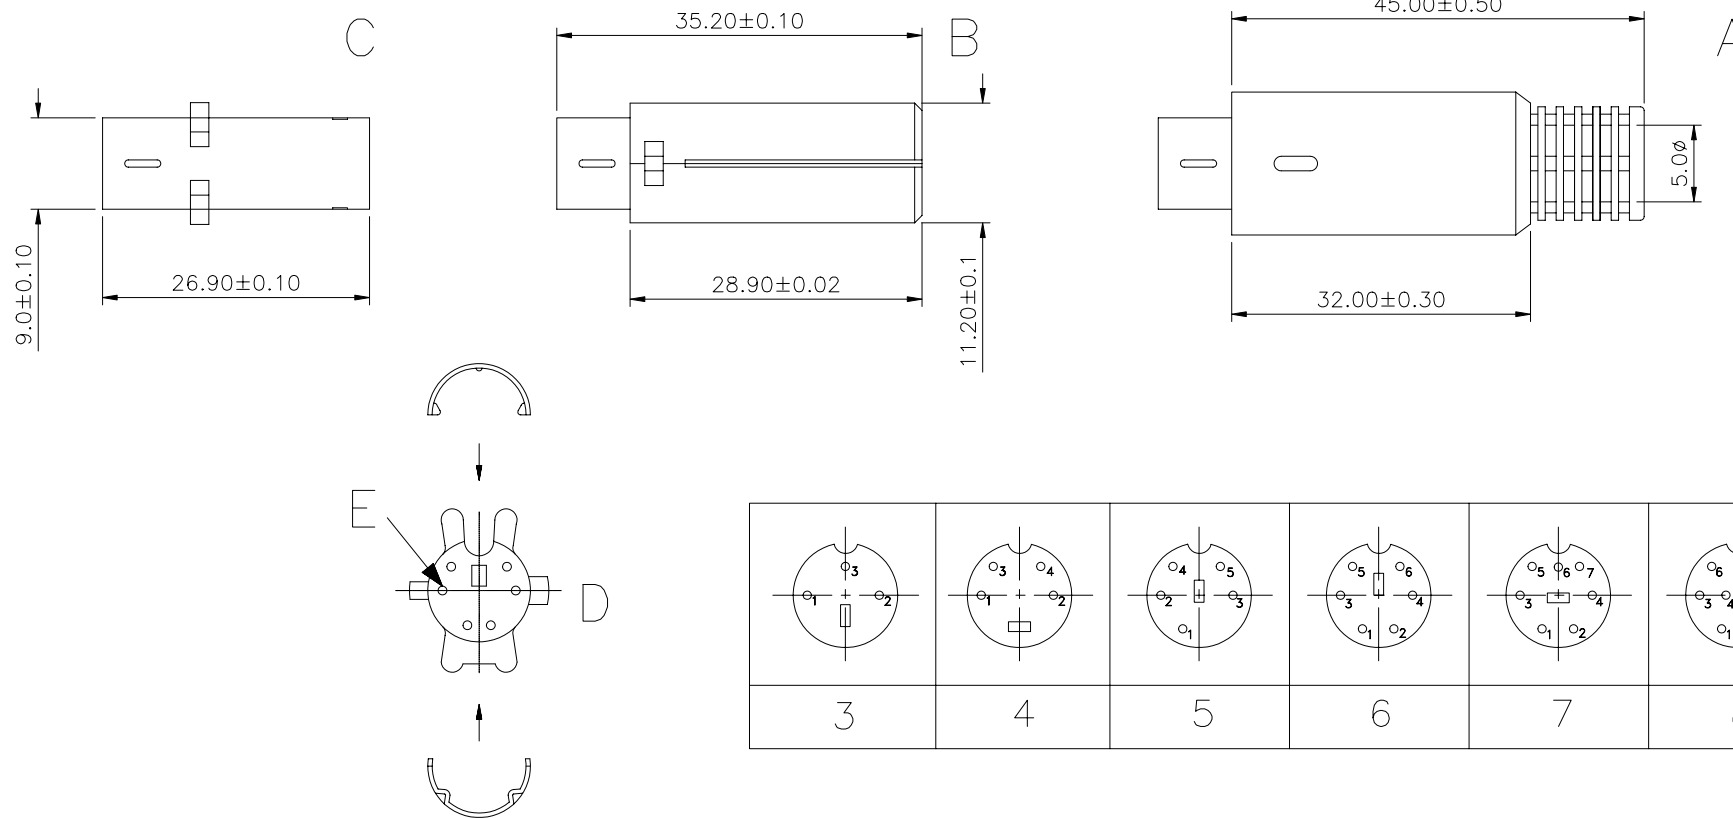

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
PART No. MDAXXP-H		MEI							
DRAWING No. MDAXXP-H		EMILY							
SCALE NONE		REV. 6		CYS	UNIT mm		BO NEW RELEASE	EMILY	09/17/2008
							NO. REV.	CHK	DATE
							REVISIONS		