



Raychem

TE Internal #: 7090833001

Hook Up Wire, Spec 99M, 600V Voltage Rating, Red Wire Color, 12AWG Wire Size, 3.31mm<sup>2</sup> Wire Size, Operating Temperature Range -65 – 125 °C

[View on TE.com >](#)

Wire & Cable > Hook Up Wire



Cable Type: **Spec 99M**

Voltage Rating: **600 V**

Wire Color: **Red**

Insulation Material: **Radiation-Crosslinked, Modified Polyester**

Conductor Material: **Tin-Plated Copper**

**Features**

**Product Type Features**

Product Type	Cable
Product Classification	Cable - Spec 99 & 100
Cable Style	Primary
Cable Type	Spec 99M

**Configuration Features**

Number of Conductors	1
Number of Strands	37

**Electrical Characteristics**

Voltage Rating	600 V
----------------	-------

**Body Features**

Wire Color	Red
Insulation Material	Radiation-Crosslinked, Modified Polyester
Conductor Material	Tin-Plated Copper

**Dimensions**

Wire Diameter	2.48 mm[.098 in]
Overall Outside Diameter	2.7 mm[.1063 in]
Conductor Diameter	2.23 mm[.088 in]



Cable Insulation Thickness	.2 mm[.008 in]
Strand Size	28 AWG
Wire Size	3.31 mm <sup>2</sup>

**Usage Conditions**

Operating Temperature Range	-65 – 125 °C
-----------------------------	--------------

**Other**

Wire Source	United Kingdom
-------------	----------------

**Product Compliance**

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209) Does not contain REACH SVHC
Halogen Content	Out of Scope - excluded from Halogen requirements
Solder Process Capability	Not applicable for solder process capability

**Product Compliance Disclaimer**


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

**Compatible Parts**



TE Model / Part # 650076-000  
D-436-38


### Customers Also Bought

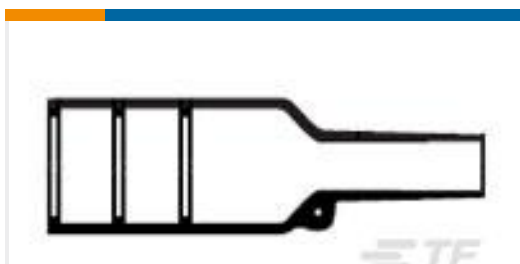


TE Model / Part #874333-000  
202K142-100/180-0




TE Model / Part #D87851-000  
HX-SCE LOW FIRE HAZARD SLEEVES

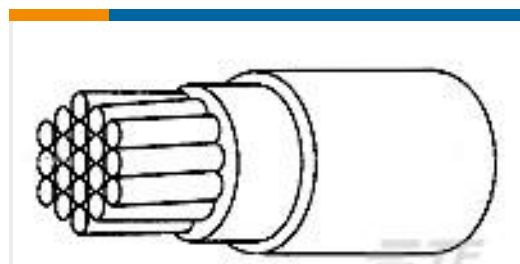


TE Model / Part #9040813001  
99M0111-12-6

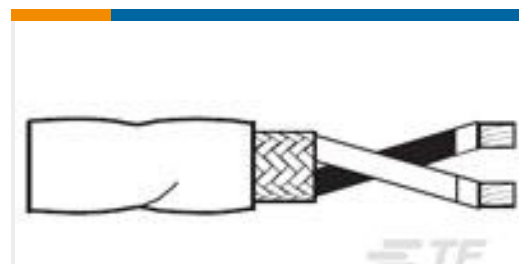

TE Model / Part #7220453001  
99M1121-22-2/6-0

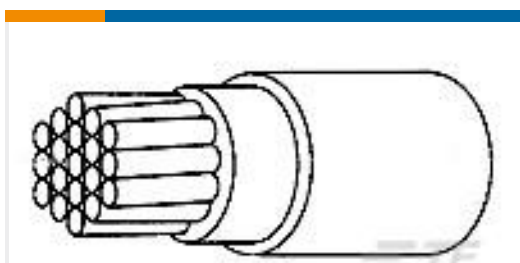


TE Model / Part #4589973001  
99M0111-16-2

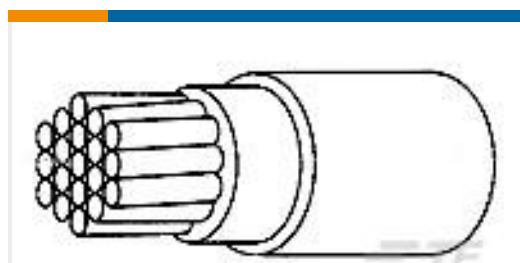


TE Model / Part #9687053001  
99M0111-12-0



TE Model / Part #HC2246  
TAPER PIN WG

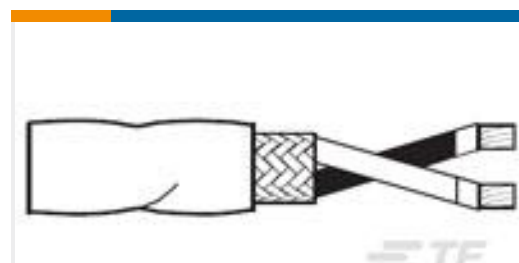

TE Model / Part #4112813001  
99M1121-20-2/6-0

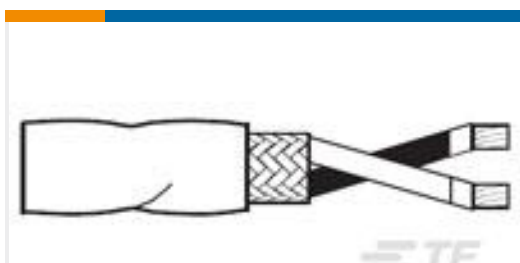

TE Model / Part #8811853001  
99M1121-24-0/9-0

### Documents

#### Product Drawings

[99M0111-12-2](#)

English

#### Datasheets & Catalog Pages

[1654025\\_Sec9\\_Type99M](#)

English

#### Raychem Wire and Cable Quick Reference Guide

English

99M0111-12-2

Hook Up Wire, Spec 99M, 600V Voltage Rating, Red Wire Color, 12AWG Wire Size,  
3.31mm<sup>2</sup> Wire Size, Operating Temperature Range -65 – 125 °C

