




3-188728-3 Product Details

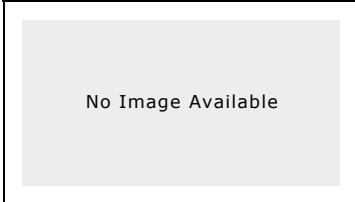

3-188728-3

PCB Mounted Jacks - Single Port, Multi-port and Stacked

Not reviewed for RoHS Compliance

Product Highlights:

- Connector
- Preloaded
- Single Port Configuration
- 1 x 1 Jack Configuration
- Jack Type = RJ45

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

TE Internal Number: 3-188728-3

Superseded

[Add to My Part List](#)



[Request Sample](#)



[Find Similar Products](#)



[Buy Product](#)

[Search for Replacement Parts](#)

Documentation & Additional Information

Product Drawings:

- [Modular Jack 8 pos. Bottom Entry for PCB \(PDF, English\)](#)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Type = Connector
- Jack Type = RJ45
- PCB Mounting Orientation = Bottom Entry (Vertical)
- PCB Mount Style = Through Hole
- Performance Category = Cat 3
- LED = Without
- Grounding Options = Without
- Panel Stops = Without
- Keyed = No
- Profile = Standard
- Color = Black
- Latch Style = Standard

Mechanical Attachment:

- Panel Mount Retention = With
- Flanged = No

Termination Features:

- Termination Method to PC Board = Solder

Dimensions:

- Height (mm [in]) = 12.00 [0.472]
- PCB Tail Length (mm [in]) = 2.79 [0.110]
- PCB Thickness, Recommended (mm [in]) = 1.57 [0.062]

Body Features:

- Inverted Jack Face = No

Contact Features:

- Solder Tail Contact Plating = Tin-Lead over Nickel
- Contact Plating, Mating Area, Material = Gold (50)
- Contact Base Material = Phosphor Bronze

Housing Features:

- Housing Material = High Temperature Nylon

Configuration Features:

- Preloaded = Yes
- Port Configuration = Single
- Jack Configuration = 1 x 1
- Number of Positions = 8
- Shielded = No
- Number of Contacts Loaded = 8

Industry Standards:

- RoHS/ELV Compliance = Not reviewed for ELV/RoHS compliance
- Lead Free Solder Processes = Not reviewed for lead free solder process
- UL Flammability Rating = UL 94-HB

Packaging Features:

- Packaging Method = Loose Piece
- Packaging Quantity = 500/Box

Product Availability:

- Region = Asia, North America

Other:

- Brand = AMP
- Comment = True positioning of the solder tines may be affected by bulk packaging. Solder stop could be loosened during transport.

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

