

HIGH FREQUENCY CURRENT TRANSFORMERS

- * Operating frequency: 20kHz.- 100kHz.
- * Totally encapsulated in UL approved DAP plastic cup.
- * With or without wound primary turns.
- * Loading resistor inserted upon request.
- * Built to UL, MIL, or any other specification required.

P/N	PRI PEAK CURRENT AMPS.		PEAK OUTPUT VOLTAGE		RATED TERMINATING RESISTANCE OHM	TERMINATING RESISTOR RATING (W)		TURNS RATIO	DCR MAX. OHMS	L(MIN) @20kHz., 1VOLT mH	FIG.
	NOM	MAX	NOM	MAX		NOM	MAX				
5600	3	14	2.94	13.5	30	0.3	6.5	30:1	0.30	2.0	1
5601	5	23	4.94	22.5	50	0.5	10.7	50:1	0.50	7.0	1
5602	10	46	9.94	45.5	100	1	21.2	100:1	1.20	29	1
5603	20	92	19.9	91.5	200	2	42.3	200:1	2.0	117	1
5604	40	175	39.9	175	400	4	77	400:1	5.0	399	2
5605	60	192	59.9	192	600	6	61.5	600:1	9.0	898	2
5606	80	198	79.9	198	800	8	49.0	800:1	15	1597	2
5607	2	9	1.94	9.11	20	0.2	4.6	20CT:1	0.20	1	1
5608	4	18	3.94	18	40	0.4	8.6	40CT:1	0.40	4	1
5609	10	46	9.94	45.5	100	1	21.2	100CT:1	1.20	29	1
5610	20	92	19.9	91.5	200	2	42.3	200CT:1	2.00	117	1
5611	50	174	49.9	174	500	5	60.6	500CT:1	7.5	624	2
5612	80	198	79.9	198	800	8	49.0	800CT:1	15	1597	2
5613	100	196	99.9	196	1000	10	38.4	1000CT:1	24.5	2496	2

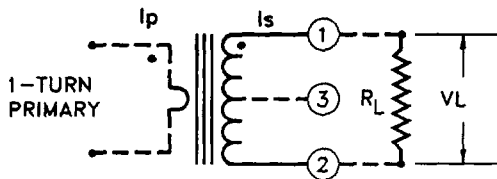


FIG. 1

NOTE:

UNLESS OTHERWISE REQUESTED, THE ONE-TURN PRIMARY, THE LOADING RESISTOR AND THE CENTER-PIN ON NON-CENTER-TAPPED SECONDARIES ARE NOT INCLUDED.

FIG. 2

