

AH2114/AH2114C DPST Analog Switch

General Description



The AH2114 is a DPST analog switch circuit comprised of two junction FET switches and their associated driver. The AH2114 is designed to fulfill a wide variety of high level analog switching applications including multiplexers, A to D Converters, integrators, and choppers. Design features include:

- Low ON resistance, typically 75 Ω
- High OFF resistance, typically 10¹¹ Ω

- Large output voltage swing, typically $\pm 10V$
- Input signals in excess of 40 MHz
- Turn-ON and turn-OFF times typically 1 μs

The AH2114 is guaranteed over the temperature range -55°C to +125°C whereas the AH2114C is guaranteed over the temperature range 0°C to +85°C.

Schematic and Connection Diagrams

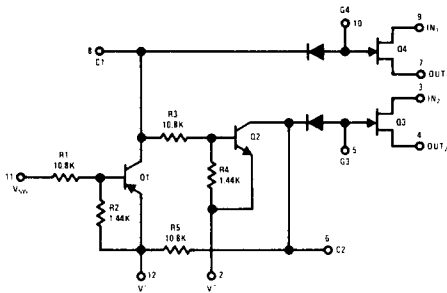

Circuit is shown with V_{GS} logic "1."

Order Number AH2114G or AH2114CG
See Package H12C

AC Test Circuit and Waveforms





FIGURE 1.





FIGURE 2.

Absolute Maximum Ratings

Vplus Supply Voltage	+25V
Vminus Supply Voltage	-25V
Vplus- Vminus Differential Voltage	40V
Logic Input Voltage	25V
Power Dissipation (Note 3)	1.36W
Operating Temperature Range	
AH2114	-55°C to +125°C
AH2114C	0°C to +85°C
Storage Temperature Range	-65°C to +125°C
Lead Temperature (Soldering, 10 sec)	300°C

Electrical Characteristics (Notes 1 and 2)

PARAMETER	CONDITIONS	AH2114			AH2114C			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
Static Drain-Source "On" Resistance	$I_D = 1.0 \text{ mA}, V_{GS} = 0V, T_A = 25^\circ\text{C}$	75	100		75	125		Ω
	$I_D = 1.0 \text{ mA}, V_{GS} = 0V$			150		160		Ω
Drain-Gate Leakage Current	$V_{DS} = 20V, V_{GS} = -7V, T_A = 25^\circ\text{C}$	0.2	1.0		0.2	5.0		nA
			60			60		nA
FET Gate-Source Breakdown Voltage	$I_G = 1.0 \mu\text{A}$ $V_{DS} = 0V$	35			35			V
Drain-Gate Capacitance	$V_{DG} = 20V, I_S = 0$ $f = 1.0 \text{ MHz}, T_A = 25^\circ\text{C}$	4.0	5.0		4.0	5.0		pF
Source-Gate Capacitance	$V_{DG} = 20V, I_D = 0$ $f = 1.0 \text{ MHz}, T_A = 25^\circ\text{C}$	4.0	5.0		4.0	5.0		pF
Input 1 Turn-ON Time	$V_{IN1} = 10V, T_A = 25^\circ\text{C}$ (See Figure 1)	35	60		35	60		ns
Input 2 Turn-ON Time	$V_{IN2} = 10V, T_A = 25^\circ\text{C}$ (See Figure 1)	1.2	1.5		1.2	1.2		μs
Input 1 Turn-OFF Time	$V_{IN1} = 10V, T_A = 25^\circ\text{C}$ (See Figure 1)	0.6	0.75		0.6	0.75		μs
Input 2 Turn-OFF Time	$V_{IN2} = 10V, T_A = 25^\circ\text{C}$ (See Figure 1)	50	80		50	80		ns
DC Voltage Range	$T_A = 25^\circ\text{C}$ (See Figure 2)	± 9.0	± 10.0		± 9.0	± 10.0		V
AC Voltage Range	$T_A = 25^\circ\text{C}$ (See Figure 2)	± 9.0	± 10.0		± 9.0	± 10.0		V

Note 1: Unless otherwise specified these specifications apply for pin 12 connected to +15V, pin 2 connected to -15V, -55°C to 125°C for the AH2114, and 0°C to 85°C for the AH2114C.

Note 2: All typical values are for $T_A = 25^\circ\text{C}$.

Note 3: Derate linearly at 100°C/W above 25°C.