


SRID2.5-F/Q

- 3x2 Connections



Phoenix Mecano Brand

Technical Data


Wire sizes		Insulating Material	
Solid min	0.2 mm ²	Material	PA 6.6
Solid max	4.0 mm ²	Flammability Class	UL 94 V-2
Stranded (flexible) min	0.2mm ²	Temperatures	
Stranded (flexible) max	4.0 mm ²	Working Temperature	-40 - 105 °C
Stranded with Ferrule min	0.2 mm ²	Dimensions	
Stranded with Ferrule max	2.5 mm ²	Stripped Length	7.0 mm
Clamping Range min	0.2mm ²	Width	5.0 mm
Clamping Range max	4.0 mm ²	Length	84.8 mm
		Height TS35 x 7.5	58.3 mm
		Height TS32	62.8 mm

Electrical Data


General

Cross Connection Channels	3
---------------------------	---

Colours

	BEIGE, similar RAL 1019
---	-------------------------

Connection Diagram

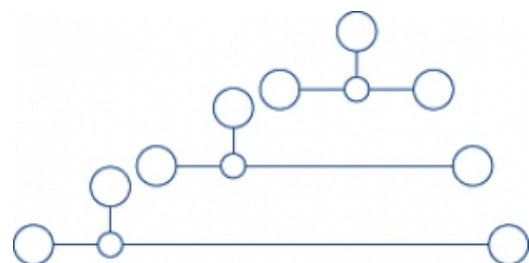

Order Data

Article Designation	Article Number	PU
SRID2.5-F/Q-BEIGE	42269.2	50

Accessoires

Article Designation	Article Number	PU
End Plate AP2.5/ID	492699.2	20
Uninsulated Wire-End Ferrule H2.5/12	492224.0	1000
Cross-Connection uninsulated Q3	492423.0	50
End Plate AP1.5-4	492738.2	50
Cross-Connection uninsulated Q10	492425.0	20
End Stopn ES35/K/ST	492828.0	50
Socket Plug STB8.5/2.3	492075.0	50
Test Plug PS2.3	492007.0	20
Quick Labelling PSB5/50	494600.7	500

Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage	300 V	300 V	250 V
Rated Current	20 A	20 A	24 A
Rated Wire Size	AWG 22-14	AWG 22-14	2.5 mm ²
Rated Impulse Voltage			4 V
Pollution Degree			3