


SPECIFICATION:
 Contact Current Rating : 1 Amperes
 Dielectric Withstanding Voltage : AC 750V For 1 Minute
 Insulation Resistance: 1000 Megohms Minimum
 Contact Resistance : 30 Milliohms Maximum
 Total Mating Force:3.0kgf Max.
 Total Unmating Force:0.5kgf
 Operating Temperature : -55°C To +85°C
 Contact : Copper Alloy,T=0.25mm
 Selective Au Plated On Mating Area
 Insulator :High Temperature Thermoplastic With G.F.
 UL 94 V-0 Rated,Black
 Shell : Spcc,T=0.30mm

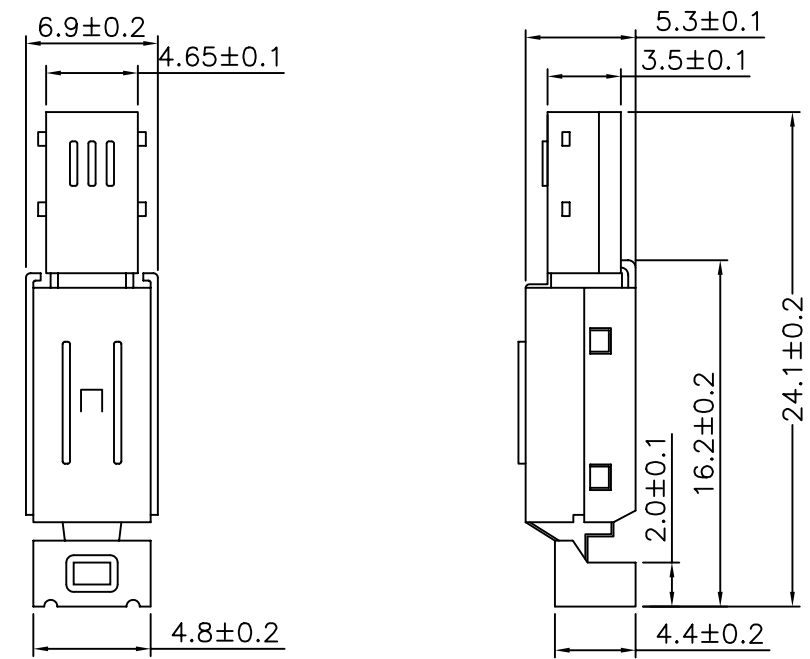

AUK A NUMBER OF AUK GROUP
太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

DRAWING No.
 MSB4BPS

APPROVED BY MEI
 CHECKED BY RAN
 DRAWING BY HZF

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

SCALE NONE REV. A UNIT mm

AREA	REVISIONS	CHK	DATE