


# HD74HC147 ● 10-to-4-line Priority Encoder

The HD74HC147 features priority encoding of the inputs to ensure that only the highest order data line is encoded. Nine input lines are encoded to a four line BCD output. The implied decimal zero condition requires no input condition as zero is encoded when all nine data lines are at a high logic level. All data inputs and outputs are active at the low logic level.

## FEATURES

- High Speed Operation:  $t_{pd}=14.5\text{ns typ. } (C_L=50\text{pF})$
- High Output Current: Fanout of 10 LSTTL Loads
- Wide Operating Voltage:  $V_{CC}=2\sim 6\text{V}$
- Low Input Current:  $1\mu\text{A max.}$
- Low Quiescent Supply Current:  $I_{CC}(\text{static})=4\mu\text{A max. } (T_A=25^\circ\text{C})$

## PIN ARRANGEMENT

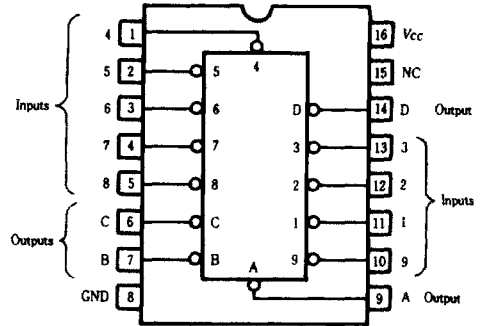

(Top View)

## FUNCTION TABLE

Inputs									Outputs			
1	2	3	4	5	6	7	8	9	D	C	B	A
H	H	H	H	H	H	H	H	H	H	H	H	H
x	x	x	x	x	x	x	x	L	L	L	H	H
x	x	x	x	x	x	x	L	H	L	H	H	H
x	x	x	x	x	x	L	H	H	H	L	L	L
x	x	x	x	L	H	H	H	H	H	L	L	H
x	x	x	L	H	H	H	H	H	H	L	H	L
x	x	L	H	H	H	H	H	H	H	H	L	L
x	L	H	H	H	H	H	H	H	H	H	L	H
L	H	H	H	H	H	H	H	H	H	H	H	L

## DC CHARACTERISTICS

Item	Symbol	$V_{CC}(\text{V})$	Test Conditions	$T_A=25^\circ\text{C}$			$T_A=-40\sim+85^\circ\text{C}$		Unit		
				min	typ	max	min	max			
Input Voltage	$V_{IH}$	2.0	$V_{in}=V_{IH}$ or $V_{IL}$	1.5	—	—	1.5	—	V		
		4.5		3.15	—	—	3.15	—			
		6.0		4.2	—	—	4.2	—			
	$V_{IL}$	2.0		—	—	0.5	—	0.5	V		
		4.5		—	—	1.35	—	1.35			
		6.0		—	—	1.8	—	1.8			
Output Voltage	$V_{OH}$	2.0	$V_{in}=V_{IH}$ or $V_{IL}$	$I_{OH}=-20\mu\text{A}$	1.9	2.0	—	1.9	—	V	
		4.5			4.4	4.5	—	4.4	—		
		6.0			5.9	6.0	—	5.9	—		
	$V_{OL}$	4.5		$I_{OL}=20\mu\text{A}$	4.18	—	—	4.13	—	V	
		6.0			5.68	—	—	5.63	—		
		2.0			$I_{OL}=4\text{mA}$	—	0.0	0.1	—		0.1
		4.5				—	0.0	0.1	—		0.1
		6.0				—	0.0	0.1	—		0.1
		4.5			$I_{OL}=5.2\text{mA}$	—	—	0.26	—		0.33
6.0	—	—	0.26	—		0.33					
Input Current	$I_{in}$	6.0	$V_{in}=V_{CC}$ or GND	—	—	$\pm 0.1$	—	$\pm 1.0$	$\mu\text{A}$		
Quiescent Supply Current	$I_{CC}$	6.0	$V_{in}=V_{CC}$ or GND, $I_{in}=0\mu\text{A}$	—	—	4.0	—	40	$\mu\text{A}$		

**■ AC CHARACTERISTICS** ( $C_L=50\text{pF}$ , Input  $t_r=t_f=6\text{ns}$ )

Item	Symbol	$V_{CC}(V)$	Test Conditions	$T_a=25^\circ\text{C}$			$T_a=-40\sim+85^\circ\text{C}$		Unit
				min	typ	max	min	max	
Propagation Delay Time	$t_{PLH}$	2.0		—	—	220	—	275	ns
		4.5		—	15	44	—	55	
		6.0		—	—	37	—	47	
	$t_{PHL}$	2.0		—	—	220	—	275	ns
		4.5		—	14	44	—	55	
		6.0		—	—	37	—	47	
Output Rise/Fall Time	$t_{TLH}$	2.0	—	—	75	—	95	ns	
		4.5	—	5	15	—	19		
	$t_{THL}$	6.0	—	—	13	—	16		
Input Capacitance	$C_{i_1}$	—		—	5	10	—	10	pF