
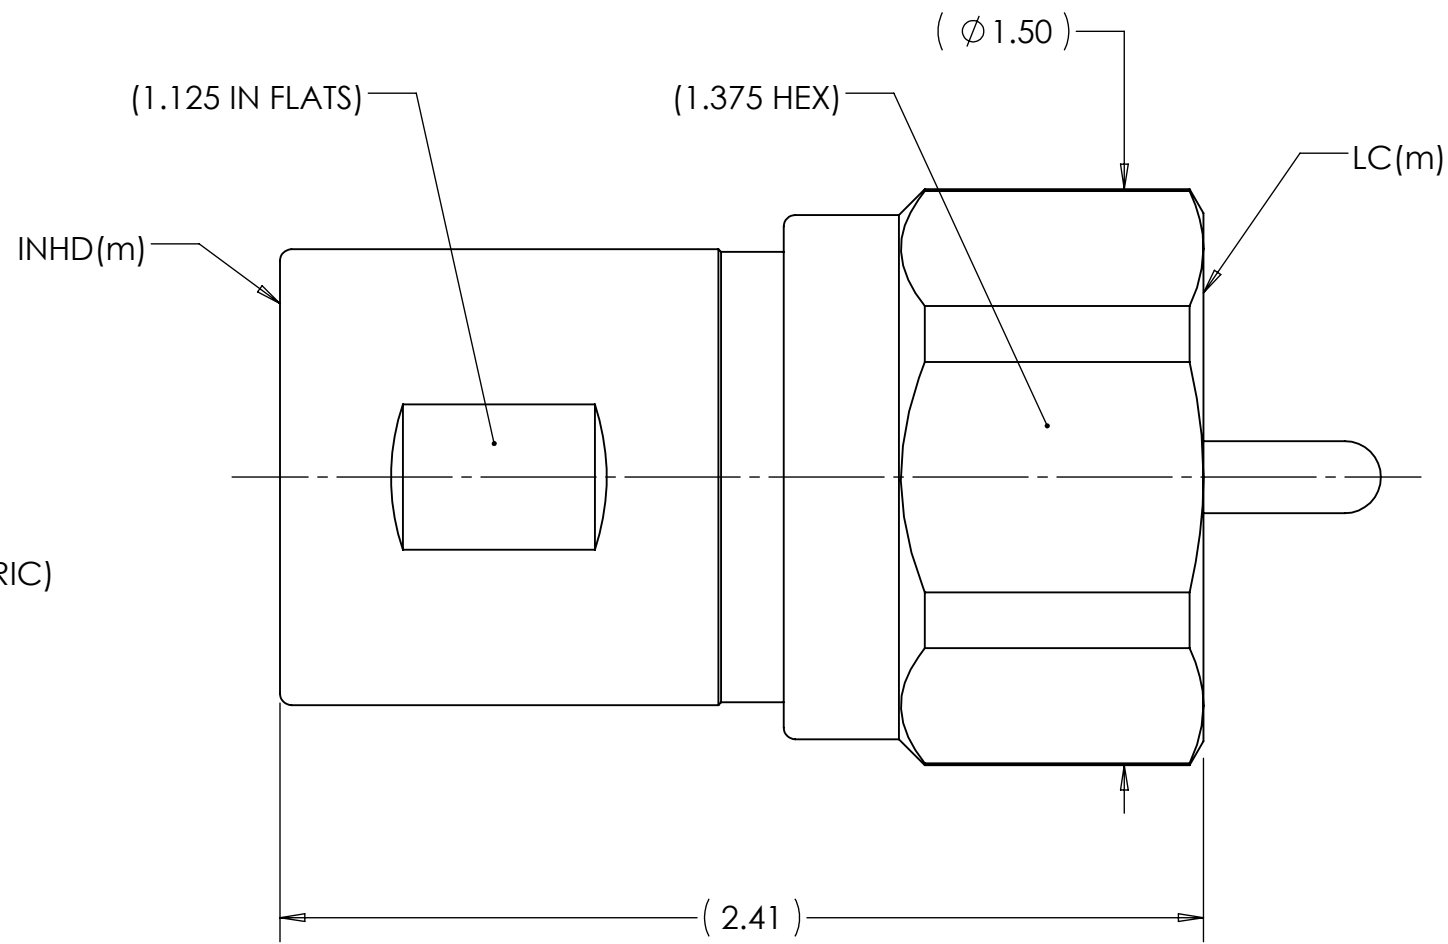


This document, including the design, configuration and mechanical features revealed herein are the sole, confidential and proprietary property of TRU Corporation. Reproduction or use thereof, in whole or part, is prohibited without the prior written consent of TRU Corporation.

REV.	DESCRIPTION	DATE	APPROVED
-	ORIGINAL ISSUE	08/19/15	AM

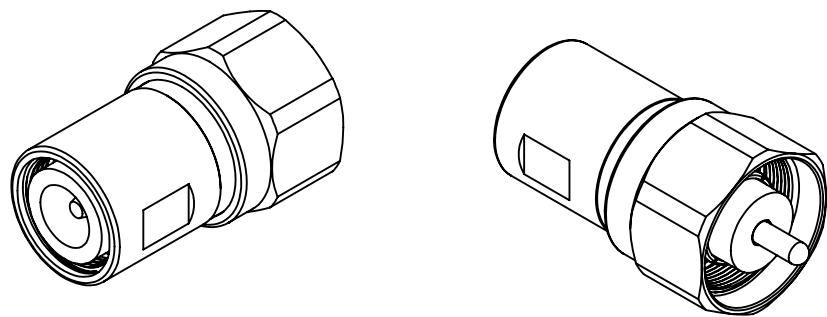

ENGINEERING DATA


ELECTRICAL:
 IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: DC to 1 GHz

MECHANICAL:
 INTERFACE: LC(m) per MIL-STD-348 FIG 315-1 (PTFE DIELECTRIC)
 INHD(m) per TRU SPEC

MATERIAL:
 CONTACT: BRASS
 INSULATORS: PTFE
 CONTACT FINGERS: BERYLLIUM COPPER
 HOUSING & COUPLING NUT: STAINLESS STEEL
 O-RING: NEOPRENE

FINISH:
 CONTACT: GOLD PLATED
 CONTACT FINGERS: SILVER PLATED
 HOUSING & COUPLING NUT: PASSIVATED

- NOTES:**
- UNLESS OTHERWISE SPECIFIED; ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 - INHD(m) MATES WITH TRU HIGH POWER TEST CABLE ASSEMBLY.

MATERIAL	DO NOT SCALE DRAWING	DRAWN AM	DATE 08/19/15	 TRU Corporation 245 Lynnfield St, Peabody, MA 01960
	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES	ENG APPR. AM	DATE 08/19/15	
COMMENTS:	TOLERANCES: FRACTIONS: ±1/64 .XX : ±.01 .XXX: ±.005 ANGLES: ±1/2° MACHINED SURFACES: 63/√	MFG APPR.	DATE	TITLE: CONNECTOR, COAXIAL LC(m) REPLACEABLE CONNECTOR
		OTHER APPR.	DATE	
surface area: sq inch	weight: 0.48 lbs	THIRD ANGLE PROJECTION		SIZE B DWG. NO. TRU-10873 REV -
				CAGE CODE: 92180 SCALE: 2:1 SHEET 1 OF 1