


Coil Characteristics


COIL CODE	DC							
	A	B	D	E	F	G	H	J
Nominal coil voltage	6	12	26,5	28	36	48	74	110
Maximum pick-up voltage at 25°C	3,3	6,5	13,5	13,5	16,7	24	34,7	50
Maximum pick-up voltage at 125°C	4,5	9	18	18	23	36	48	70
Maximum hold voltage at 125°C	2,3	4,5	7	7	10	12	21	30
Minimum drop-out voltage at -70°C	0,25	0,5	1,2	1,5	2	2,4	4	5,5
Coil resistance (ohms $\pm$ 10% at 25° C)	23	90	440	500	825	1400	3500	5000
Max coil transient suppression (where applicable) VDC	-42	-42	-42	-42	-100	-100	-100	-154

OTHER VOLTAGES AVAILABLE FROM FACTORY ON REQUEST

Circuit Diagram

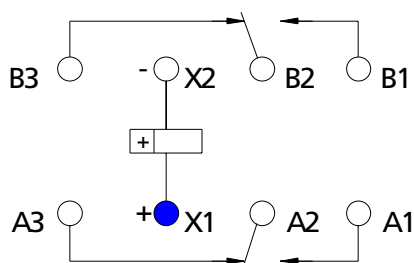

E205

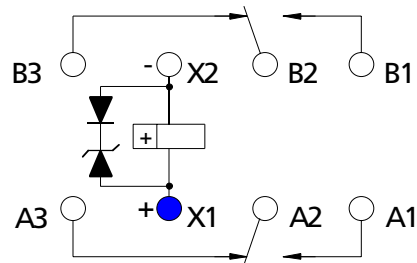


ES205

OPTIONAL INTERNAL
VOLTAGE SUPPRESSOR


■ Mounting styles

DIMENSIONS ARE IN MM (IN.)
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS $\pm 0,25$ [.010]

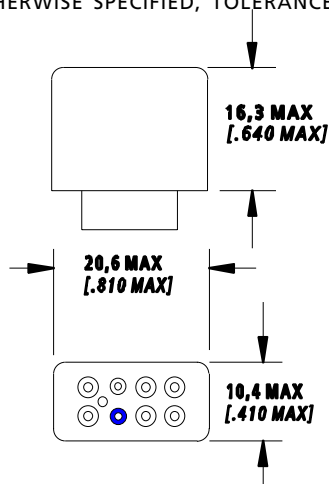


STYLE 1

NO MOUNT

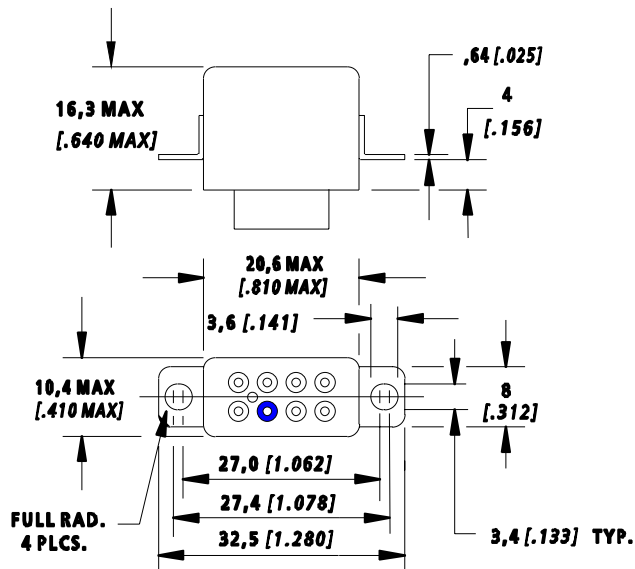


STYLE 2

RAISED VERTICAL FLANGE MOUNT

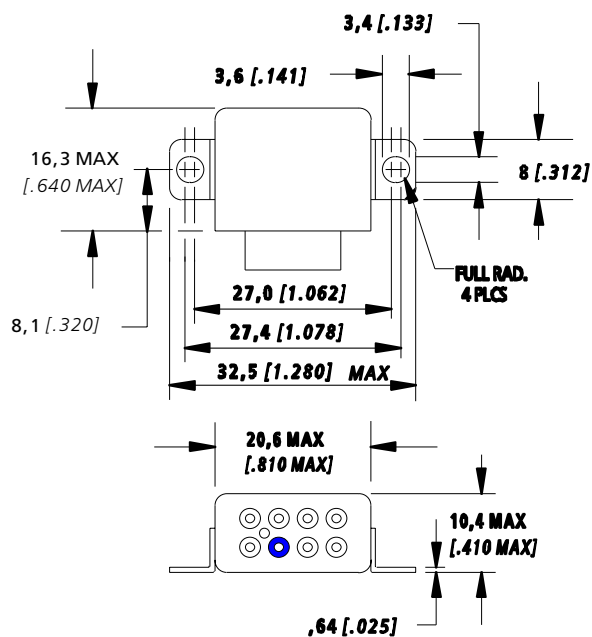

STYLE 3

HORIZONTAL FLANGE MOUNT

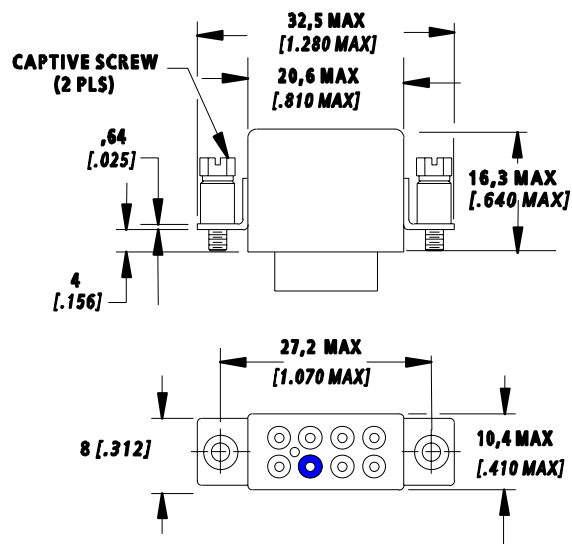


STYLE 8: M3 CAPTIVE SCREWS

STYLE C: #4-40 UNC CAPTIVE SCREWS

RAISED VERTICAL FLANGE MOUNT
WITH CAPTIVE HARDWARE

DIMENSIONS ARE IN MM (IN.)


UNLESS OTHERWISE SPECIFIED, TOLERANCE IS $\pm 0,25$ [.010]

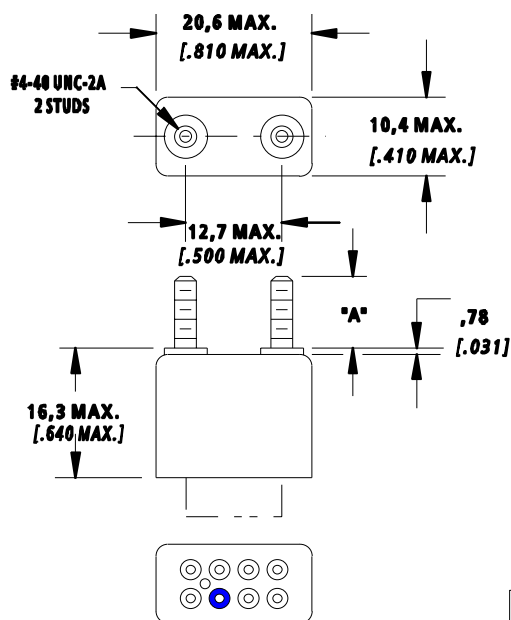

STYLE	DIM "A"
M	9,5 [.375]
R	6,35 [.250]


Termination styles

DIMENSIONS ARE IN MM (IN.)
UNLESS OTHERWISE SPECIFIED, TOLERANCE IS $\pm 0,25$ [.010]

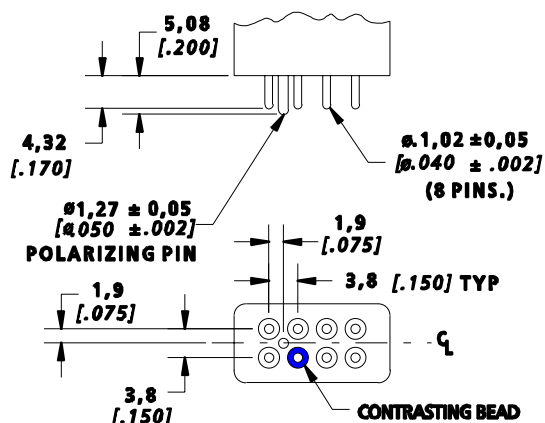


SOLDER PIN

STYLE A: TIN PLATED
STYLE B: SOLDER DIPPED

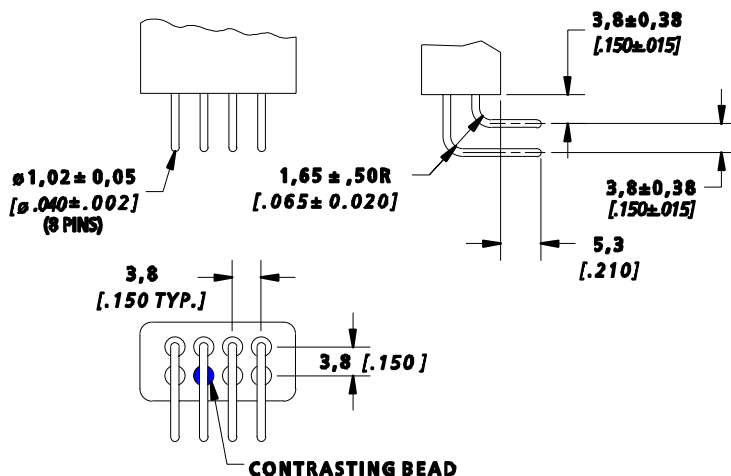


90° SOLDER PIN

STYLE D: TIN PLATED
STYLE E: SOLDER DIPPED

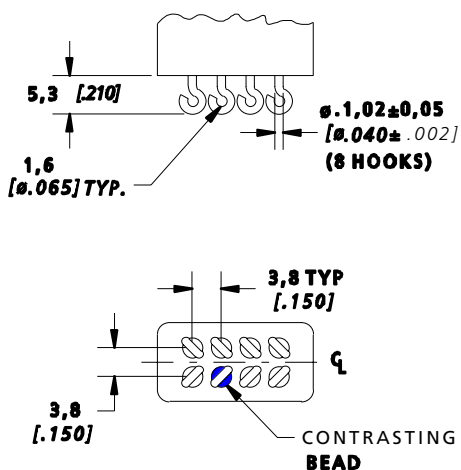

SOLDER HOOK

STYLE H: TIN PLATED
STYLE J: SOLDER DIPPED

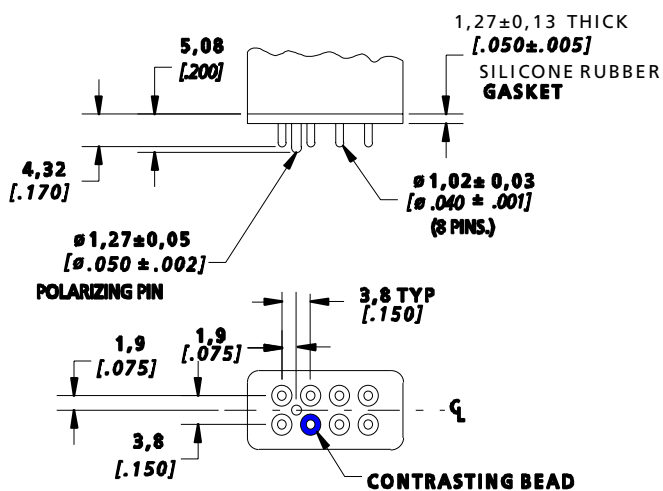

PLUG IN

STYLE M: GOLD PLATED WITH TIN
PLATED POLARIZING PIN