


**SPECIFICATIONS:**  
 Current Rating: 3A AMP  
 Dielectric Voltage: 500V AC For 1 Minute  
 Contact Resistance: 30 Milliohms Max.  
 Insulator Resistance: 5000 Megohms Min.  
 Insulator: PBT+30% Glass Filled  
 UL 94V-0,  
 Contact : Phosphor Bronze Or Brass  
 Gold Flash Over Nickel Or Tin

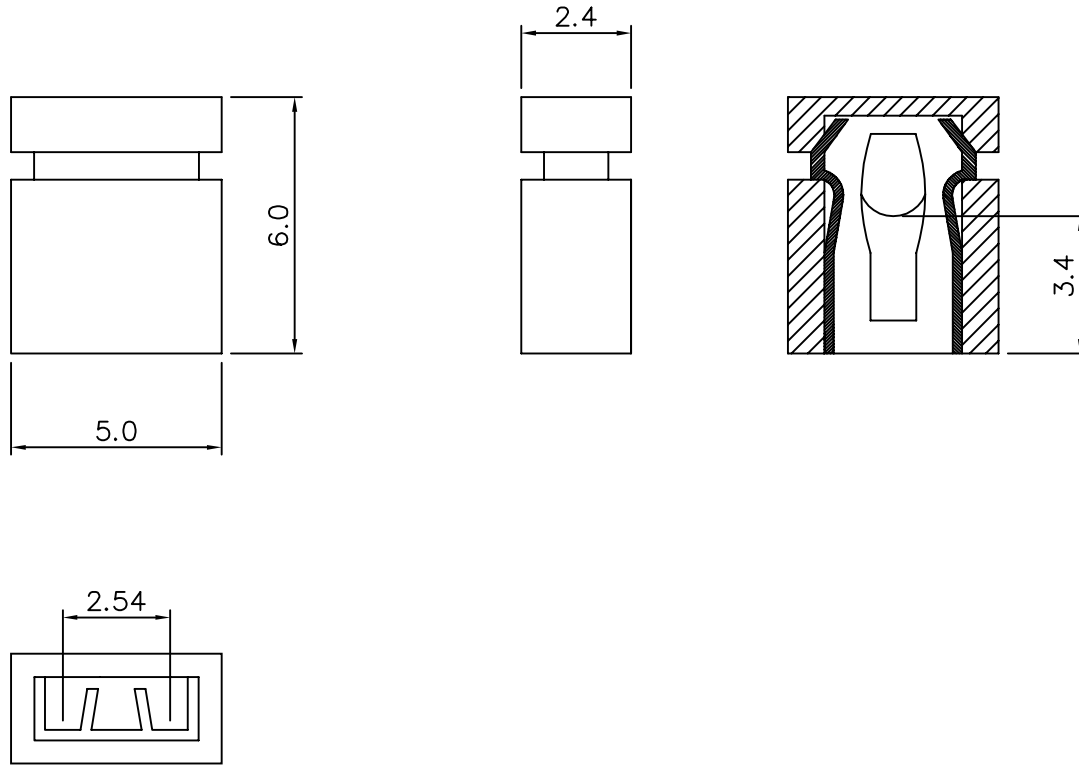

**AUK** A NUMBER OF AUK GROUP  
 太聯事業股份有限公司  
 AUK CONTRACTORS CO., LTD.

DRAWING No.  
 JA6-GE

APPROVED BY  
 MEI  
 CHECKED BY  
 RAN  
 DRAWING BY  
 HZF

UNLESS OTHERWISE SPECIFIED  
 TOLERANCES ARE  
 .X ±0.38  
 .XX ±0.25  
 .XXX

SCALE NONE REV. A UNIT mm

AREA REVISIONS CHK DATE