


SECTION A-A
SCALE 10:1

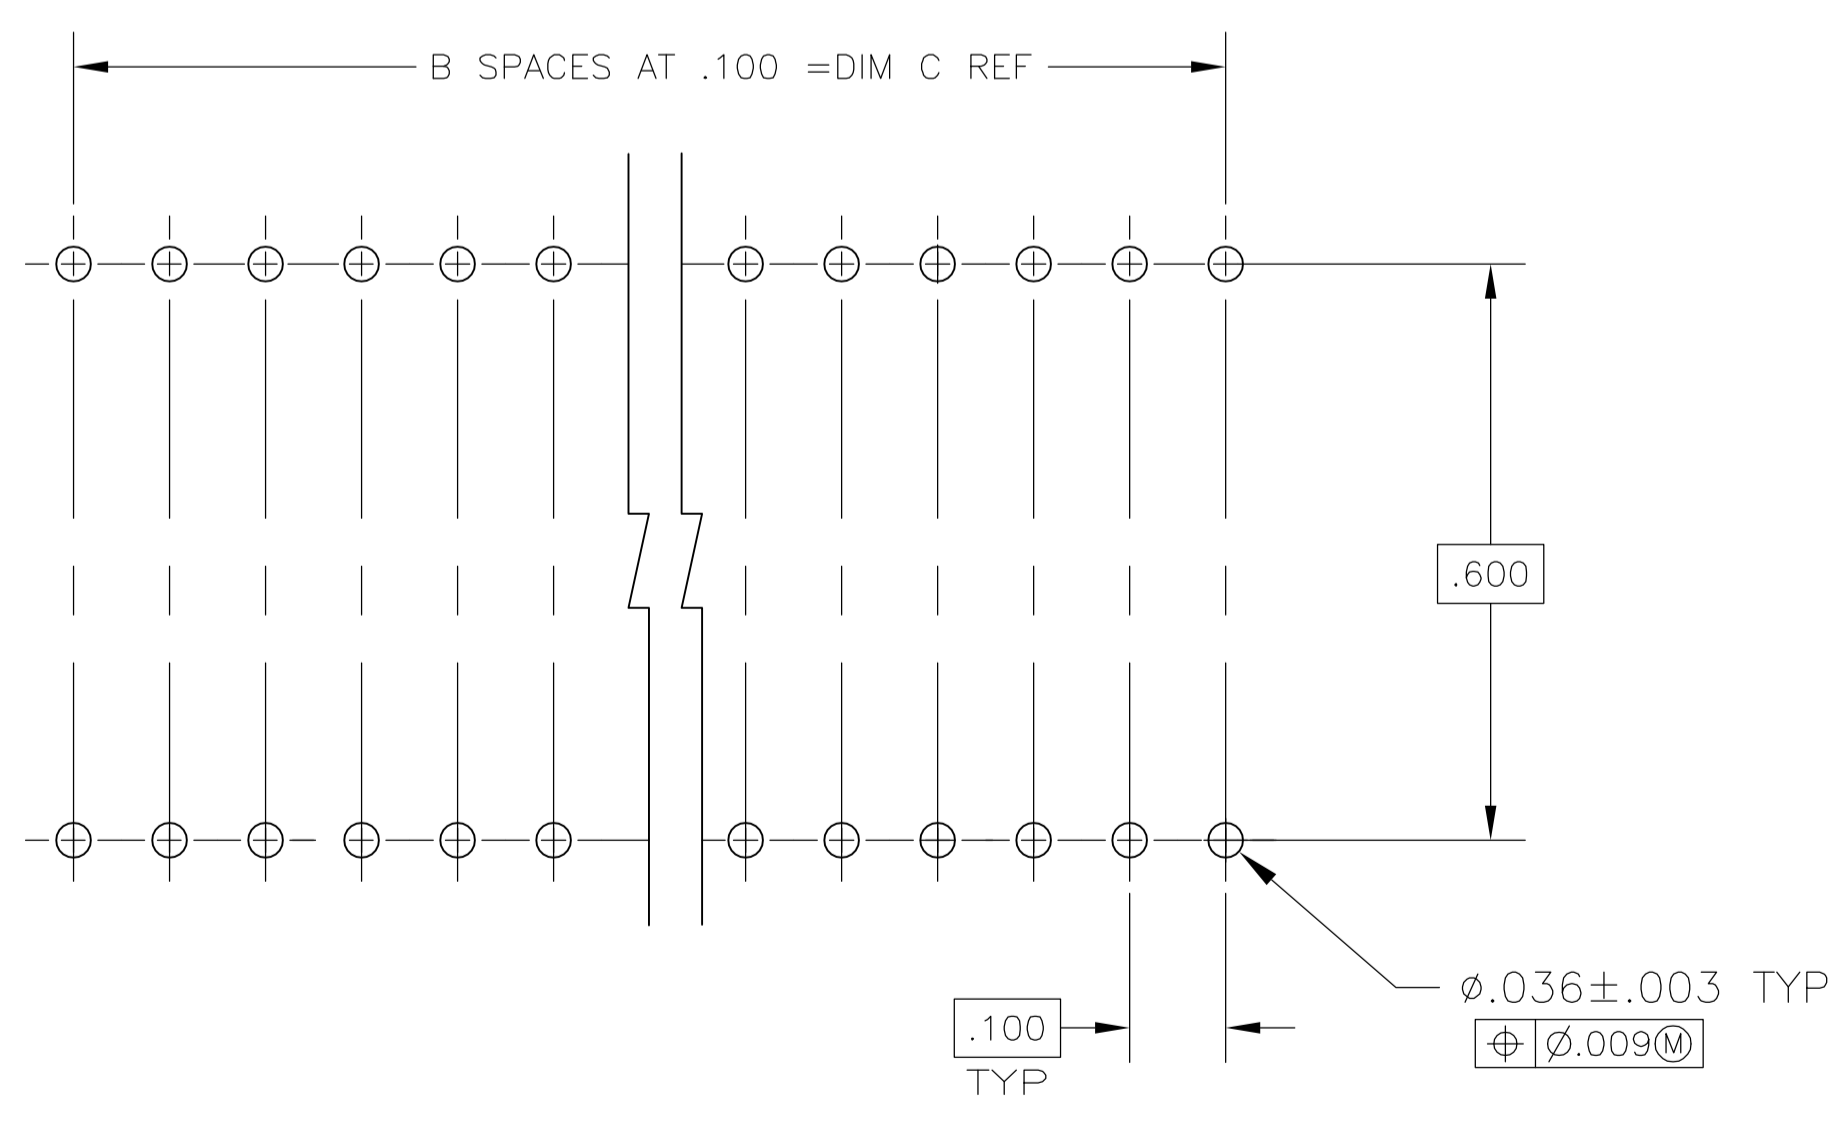

RECOMMENDED MOUNTING HOLE PATTERN
SCALE 4:1

- 1 RECEPTACLE ACCEPTS A .008-.014 THICK I.C. LEAD.
- 2 TUBE LOADED FOR AUTOMATIC INSERTION.
- 3 BECU CONTACT - PLATED WITH TWO .000030 MIN THIK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 4 PHOS. BRZ CONTACT - PLATED WITH TWO .000015 MIN THK. GOLD STRIPES IN CONTACT AREA WITH TIN ON CONTACT LEGS, BALANCE OF CONTACT NICKEL PLATED.
- 5 GLASS FILLED THERMOPLASTIC, 94V-0, BLACK

3	2.300	23	2.395	48	1-1825376-4
3	1.900	19	1.995	40	1-1825376-3
3	1.300	13	1.395	28	1-1825376-2
3	1.100	11	1.195	24	1-1825376-1
4	2.300	23	2.395	48	1825376-4
4	1.900	19	1.995	40	1825376-3
4	1.300	13	1.395	28	1825376-2
4	1.100	11	1.195	24	1825376-1
CONTACT & FINISH	DIM C	B SPCS	DIM A	POSITION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN 9139 S.VISWESWARA 22APR05
 CHK K.WRIGHT
 APVD

tyco Electronics
 Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME: DIP SOCKET ASSY, LADDER, DIPLOMATE, RET. LEAD .600 CL, LEAD FREE

PRODUCT SPEC: 108-1066
 APPLICATION SPEC: 114-1049

SIZE: A1
 CASE CODE: 00779
 DRAWING NO: C=1825376

RESTRICTED TO: -

MATERIAL: SEE TABLE
 FINISH: SEE TABLE

WEIGHT: -
 CUSTOMER DRAWING

SCALE: 5:1
 SHEET: 1 OF 1
 REV: A