



| | | |
|-------------------|------|---------------|
| CUSTOMER TERMINAL | RoHS | LEAD(Pb)-FREE |
| Sn100% | Yes | Yes |




ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

| PARAMETER | TEST CONDITIONS | VALUE |
|--------------------|--|----------------|
| D.C. RESISTANCE | 2-4 @20°C | 5.5 mOhms max. |
| D.C. RESISTANCE | 3-5 @20°C | 5.5 mOhms max. |
| D.C. RESISTANCE | 7-10 @20°C | 9.5 mOhms max. |
| D.C. RESISTANCE | 8-11 @20°C | 9.5 mOhms max. |
| D.C. RESISTANCE | 1-6 @20°C | 110 mOhms max. |
| INDUCTANCE | 2-5 tie(3+4), 10kHz, 1.0VAC, Ls | 100.0uH ±20% |
| LEAKAGE INDUCTANCE | 2-5 tie(3+4, 7+8+10+11+1+6), 100kHz, 100mVAC, Ls | 0.300uH max. |
| DIELECTRIC | 2-7 tie(1+2+3, 8+10), 2250VDC, 1 second | - |
| TURNS RATIO | (3-5):(2-4) | 1:1, ±1% |
| TURNS RATIO | (3-5):(7-10) | 1:1, ±1% |
| TURNS RATIO | (3-5):(8-11) | 1:1, ±1% |
| TURNS RATIO | (3-5):(1-6) | 1:1, ±1% |

GENERAL SPECIFICATIONS:
OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

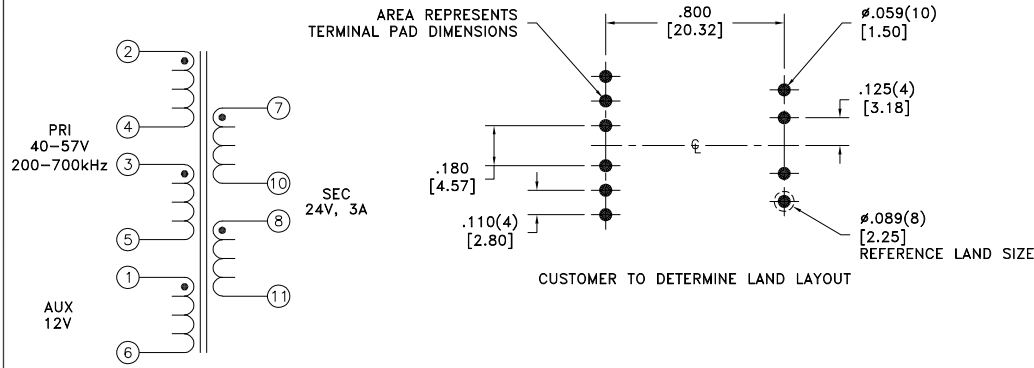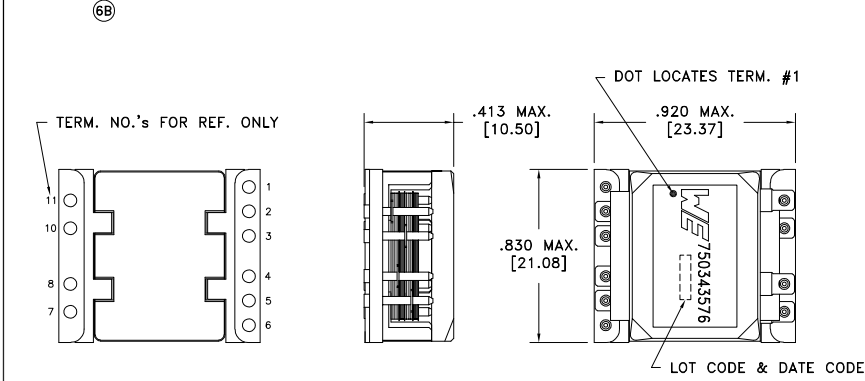

| REV. | DATE | Packaging Specifications |
|------|------|---------------------------------------|
| | | Method: Tape & Reel |
| | | PKG-0871 |
| | | www.we-online.com/midcom |
| 6B | 3/20 | |
| 6A | 7/17 | SEE REVISION SHEET FOR REVISION LEVEL |



Tolerances unless otherwise specified:
Angles: ±1° Decimals: ±.005 [.13]
Fractions: ±1/64 Footprint: ±.005 [.13]

This drawing is dual dimensioned. Dimensions in brackets are in millimeters.

DRAWING TITLE
750343576

eiSos p/n: 750343576

PART NO.
750343576

compliant RoHS

SPECIFICATION SHEET 1 OF 1