



# ZRI1.5/4

- 5 Connections

## Technical Data

Wire sizes		Insulating Material	
Solid min	0.5 mm <sup>2</sup>	Material	PA 6.6
Solid max	2.5 mm <sup>2</sup>	Flammability Class	UL 94 V-0
Stranded (flexible) min	0.5mm <sup>2</sup>	Temperatures	
Stranded (flexible) max	2.5 mm <sup>2</sup>	Working Temperature	-40 - 120 °C
Stranded with Ferrule min	0.5 mm <sup>2</sup>	Dimensions	
Stranded with Ferrule max	1.5 mm <sup>2</sup>	Width	5.1 mm
		Length	82.0 mm
		Height TS35 x 7.5	40.5 mm

## Electrical Data


### General

Cross Connection Channels	1
---------------------------	---

## Colours

BEIGE, similar RAL 1019

## Connection Diagram

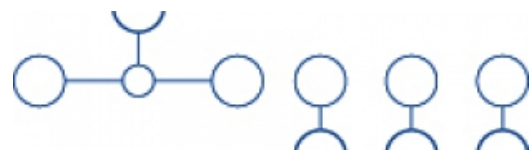

## Order Data

Article Designation	Article Number	PU
ZRI1.5/4-BEIGE	43533.2	100

## Accessoires

Article Designation	Article Number	PU
End Plate ZAP/TW ZRI1.5/4	493747.2	20
Labelling Adapters ZBA2	493786.2	50
Labelling Adapters ZBA2/Z	493787.2	50
Potential Distribution Strip ZPL1.5	493738.2	100
Potential Distribution Strip ZPL1.5-PE	493743.2	100
Cross-Connection insulated ZQI2.5/2	493710.8	50
Cross-Connection insulated ZQI2.5/0.5/99	493719.8	1
End Stopn ZES35	493748.2	50
Test Adapter ZTA1.5	4917034.2	10
Quick Labelling PSB5/50	494600.7	500

## Ratings

Ratings	CSA	CSAus	IEC
Rated Voltage	300 V	300 V	400 V
Rated Current	12.5 A	12.5 A	17.5 A
Rated Wire Size	AWG 26-14	AWG 26-14	1.5 mm <sup>2</sup>
Rated Impulse Voltage			4 V
Pollution Degree			3