


Transformer

Turns Ratio PRI : SEC 1:2CT \pm 1%

Schematic

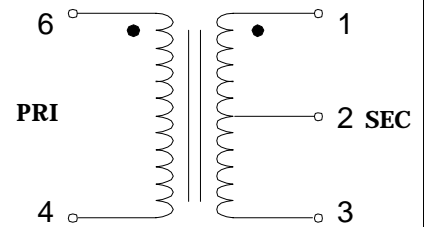


PARAMETER ¹	Min.	Typ.	Max.	Units
Inductance Pins 6-4 1kHz, 1.0 VAC	22			mH
Leakage Inductance Pins 6-4 Short (1+3), 10kHz, 100mAAC			6.0	μ H
Interwinding Capacitance Pins 6-1 10kHz, 1.0 VAC		20	30	mH
DC Resistance Pins 1-5	2.88	3.20	3.52	Ω
DC Resistance Pins 10-6	5.85	6.5	7.15	Ω
Dielectric Rating 5 -4, 5-10	1500			V _{RMS}

Designed to meet the supplementary insulation requirements of UL1950 for a working voltage of 250V

Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C

Dimensions in Inches (mm)

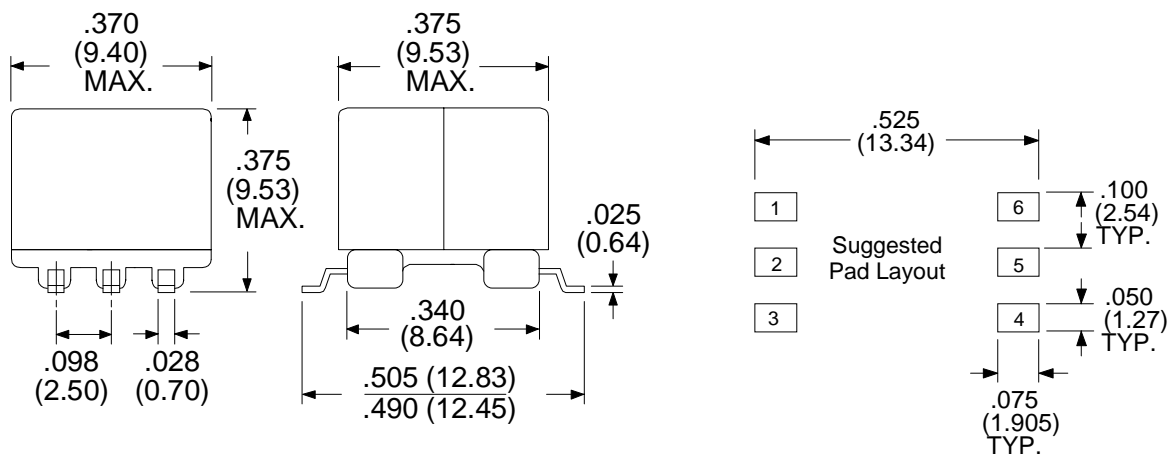

RHOMBUS P/N: **T-1449**

CUST P/N:

NAME:

DATE: **06/6/01**

SHEET: 1 of 1