

product: DELPHI PN 12158104

material: CUNISI

surface: F.SN

material thickness: 0,38 mm

cross section [mm²]: 0,5 | 0,75 | 1,0

strip length: 4,50 mm

cable type: FLRY-B

insulation \varnothing [mm]: 1,40 - 2,10

seal: DPN 15324974 (0,5)
DPN 15324976

VERSION I

Uncontrolled
Copy
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height \pm 0,05	width \pm 0,10	height \pm 0,10	width \pm 0,10	height \pm tol.	width \pm tol.
FLRY-B	0,5	16 x 0,21	1,50	80	1,35	2,20	4,20	4,10		
FLRY-B	0,75	24 x 0,21	1,80	120	1,45	2,25	4,30	4,10		
FLRY-B	1,0	32 x 0,21	2,00	160	1,55	2,25	4,40	4,15		

core:
C-2.15-3.5-19
DPN 10713698

insulation:
IS-4.00-3.0-12-X GD 66,5
DPN 10713788

anvil:
ASR-2.15-4.00-7.6-2.7-1.2
DPN 10714007

two piece anvil:
AC-2.15-3.75
DPN 10764091
AI-4.00-4.0-1.2
DPN 10806013

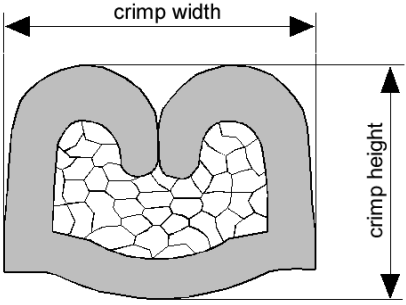


DELPHI PN 12158104



cable:
 $0,50 \text{ mm}^2 = 16 \times 0,21 \text{ mm}$

crimp height:
1,35 mm

crimp width:
2,20 mm

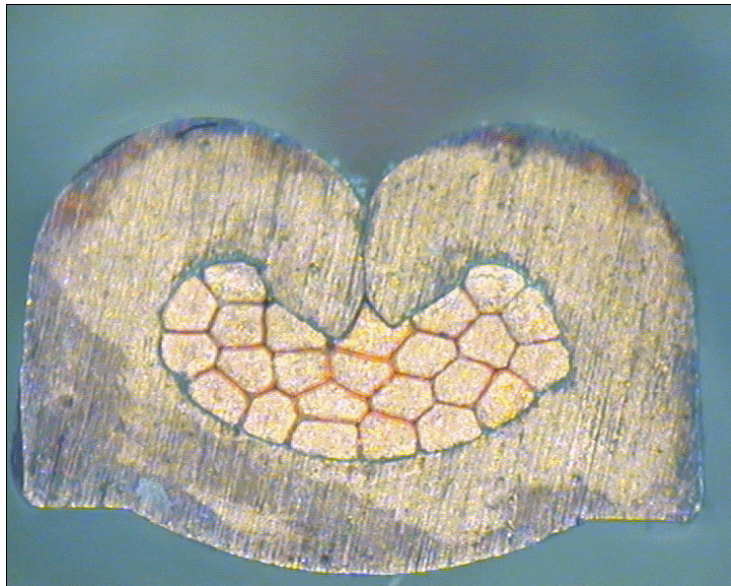

cable:
 $0,75 \text{ mm}^2 = 24 \times 0,21 \text{ mm}$

crimp height:
1,45 mm

crimp width:
2,25 mm



cable:
 $1,00 \text{ mm}^2 = 32 \times 0,21 \text{ mm}$

crimp height:
1,55 mm

crimp width:
2,25 mm