

## SINGLE SUPPLY DUAL AMPLIFIER

### ■ GENERAL DESCRIPTION

The **NJM12904** is single-supply dual operational amplifier, which can operate from 2V supply. The features are low offset voltage, low bias current, and drive TTL or DTL circuit directly.

The package lineup is DIP, SIP, DMP and others compact so that the **NJM12904** is suitable for audio for low voltage operation and any other kind of signal amplifier.


### ■ FEATURES

- Operating Voltage (+2V to +14V)
- Input Offset Voltage (5mV max.)
- Slew Rate (0.7V/ $\mu$ s typ.)
- Operating Current (0.7mA typ.)
- Bipolar Technology
- Package Outline

NJM12904D : DIP8  
 NJM12904E : EMP8  
 NJM12904R : VSP8  
 NJM12904L : SIP8

NJM12904M : DMP8  
 NJM12904V : SSOP8  
 NJM12904RB1 : TVSP8

### ■ PACKAGE OUTLINE



NJM12904D



NJM12904M



NJM12904E




NJM12904V



NJM12904R




NJM12904RB1




NJM12904L

### ■ PIN CONFIGURATION

( Top View )



NJM12904D, NJM12904M  
 NJM12904E, NJM12904V  
 NJM12904R, NJM12904RB1

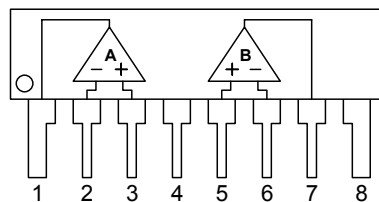


NJM12904L

### PIN FUNCTION

1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. GND
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V<sup>+</sup>

### ■ EQUIVALENT CIRCUIT (1/2Shown)

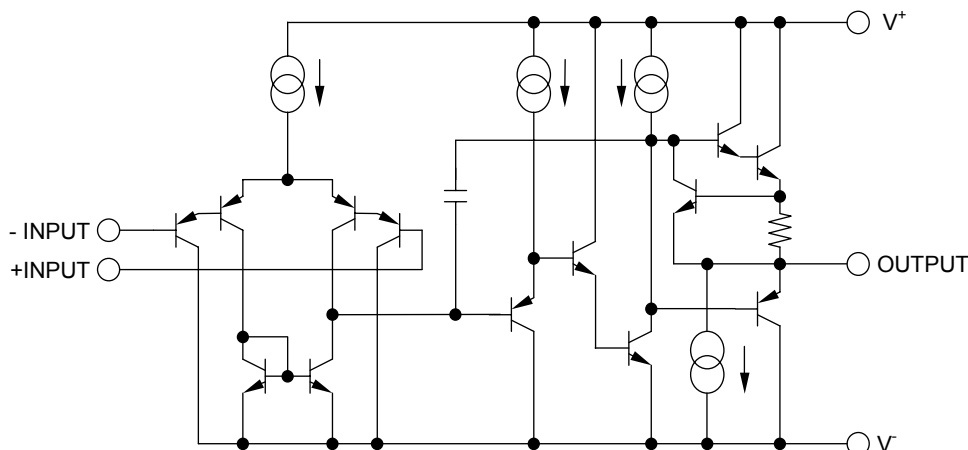

**■ ABSOLUTE MAXIMUM RATING**

(Ta=25°C)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	15	V
Differential Input Voltage	V <sub>ID</sub>	14	V
Input Voltage	V <sub>IC</sub>	- 0.3 to +14	V
Power Dissipation	P <sub>D</sub>	(DIP8) 500 (DMP8) 300 (EMP8) 300 (SSOP8) 250 (VSP8) 320 (TVSP8) 320 (SIP8) 800	mW
Operating Temperature Range	T <sub>opr</sub>	- 40 to +85	°C
Storage Temperature Range	T <sub>stg</sub>	- 50 to +125	°C

**■ ELECTRICAL CHARACTERISTICS ( V<sup>+</sup>=5V, Ta=25°C)**


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V <sub>opr</sub>		2	-	14	V
Input Offset Voltage	V <sub>IO</sub>	R <sub>S</sub> =0Ω	-	1	5	mV
Input Offset Current	I <sub>IO</sub>		-	5	50	nA
Input Bias Current	I <sub>B</sub>		-	20	150	nA
Large Signal Voltage Swing	A <sub>V</sub>	R <sub>L</sub> ≥2kΩ	-	100	-	dB
Maximum Output Voltage Range	V <sub>OM</sub>	R <sub>L</sub> =2kΩ	3.5	-	-	V
Input Common Mode Voltage Range	V <sub>ICM</sub>		0 to 3.5	-	-	V
Common Mode Rejection Ratio	CMR		-	85	-	dB
Supply Voltage Rejection Ratio	SVR		-	100	-	dB
Output Source Current	I <sub>SOURCE</sub>	V <sub>IN</sub> <sup>+</sup> =1V, V <sub>IN</sub> <sup>-</sup> =0V	20	40	-	mA
Output Sink Current	I <sub>SINK</sub>	V <sub>IN</sub> <sup>+</sup> =0V, V <sub>IN</sub> <sup>-</sup> =1V	8	20	-	mA
Channel Separation	CS	f=1k to 20kHz	-	120	-	dB
Operating Current	I <sub>CC</sub>	R <sub>L</sub> =∞	-	0.7	1.2	mA
Slew Rate	SR		-	0.7	-	V/μs
Gain Bandwidth Product	GB		-	1.5	-	MHz

## ■ TYPICAL CHARACTERISTICS


Operating Current vs. Supply Voltage  
( $T_a=25^\circ\text{C}$ )

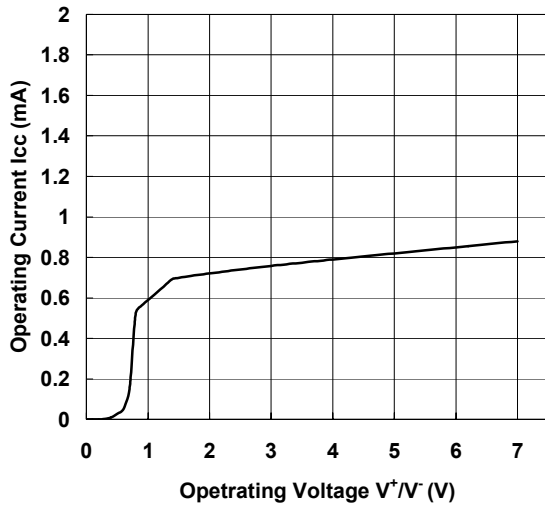


Input Offset Voltage vs. Operating Voltage  
( $T_a=25^\circ\text{C}$ )

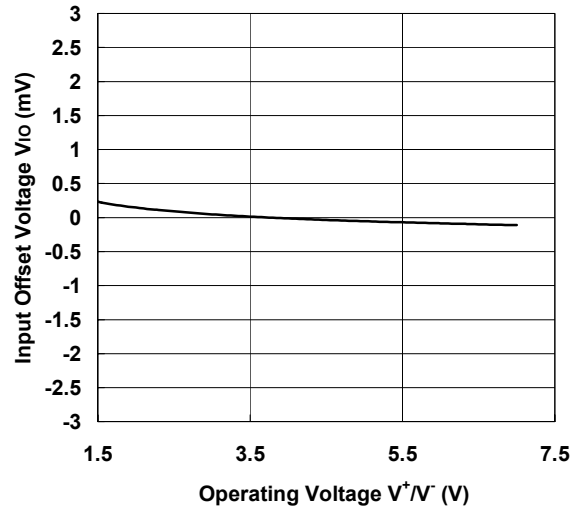


Input Bias Current vs. Operating Voltage  
( $T_a=25^\circ\text{C}$ )

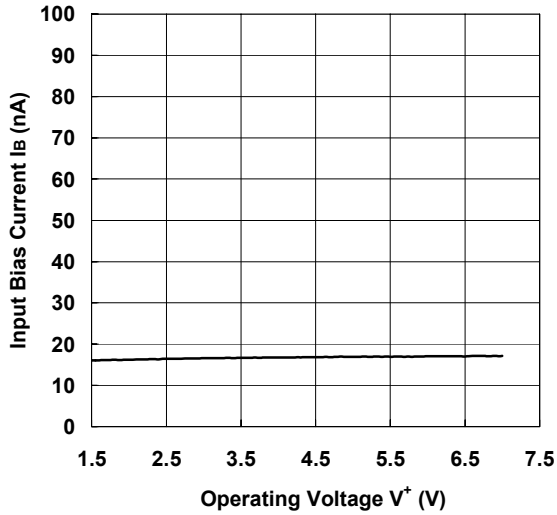

Maximum Output Voltage Swing  
( $T_a=25^\circ\text{C}$ )

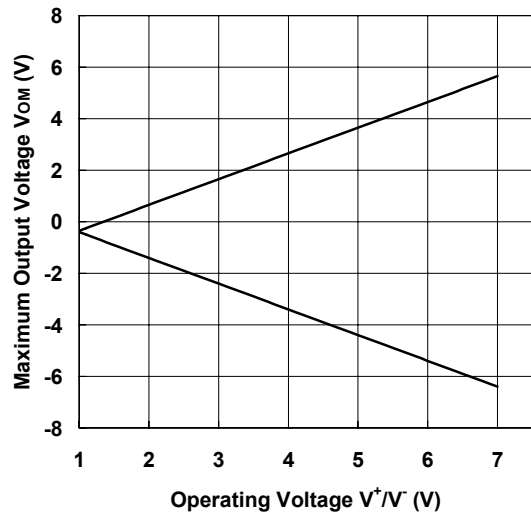


Input Offset Voltage vs. Input Voltage  
( $V^+=5\text{V}, T_a=25^\circ\text{C}$ )

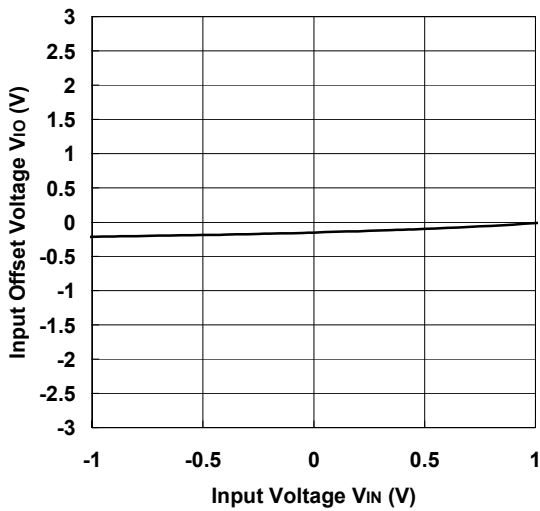


■ TYPICAL CHARACTERISTICS


Maximum Output Voltage vs. Load Resistance (Ta=25°C)

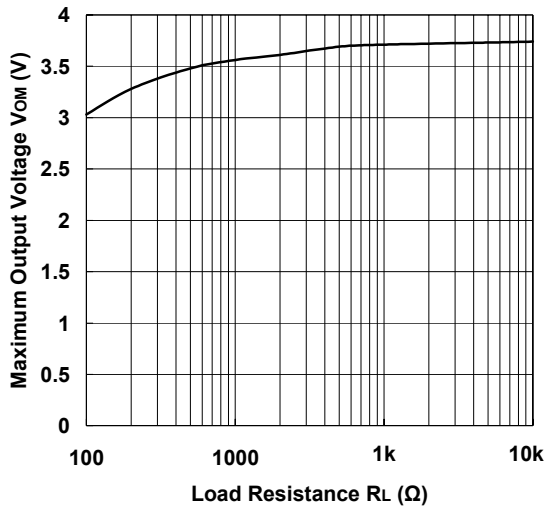


Maximum Output Voltage vs. Frequency (Ta=25°C)

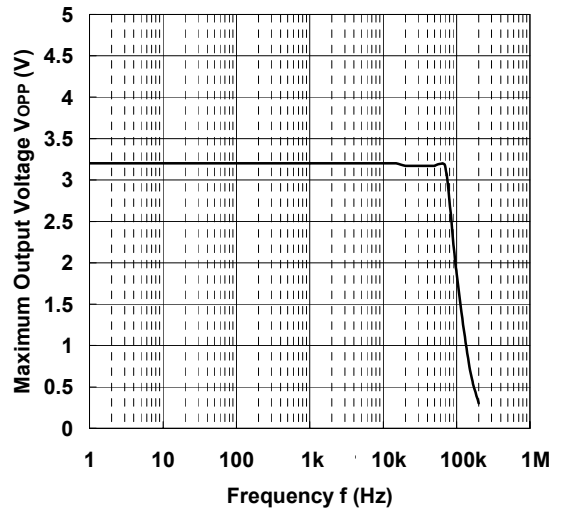


Output Voltage vs. Output Sink Current (Ta=25°C)

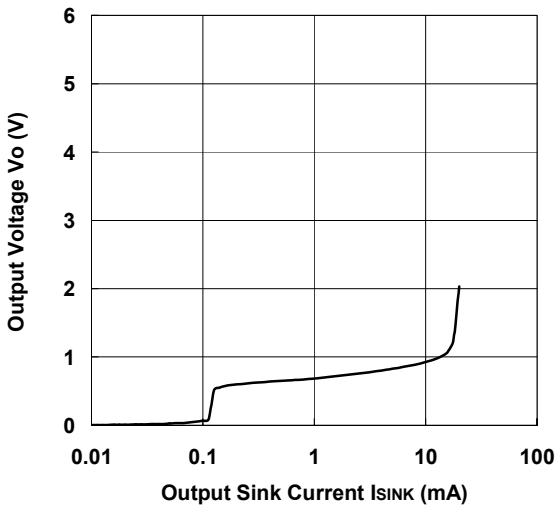


Output Voltage vs. Output Source Current (Ta=25°C)

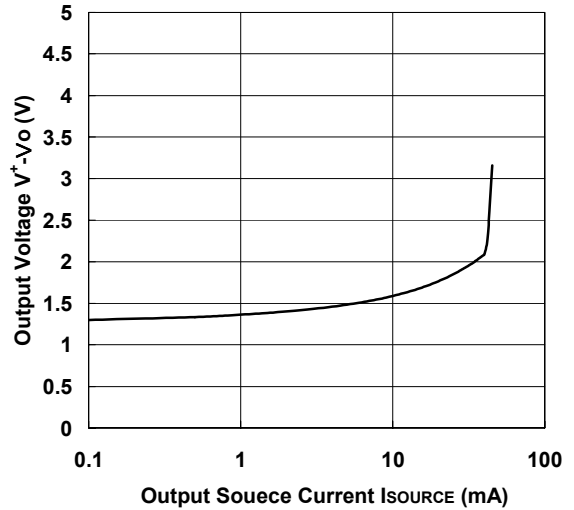

Voltage Gain vs. Operating Voltage (Ta=25°C, RL=2kΩ)

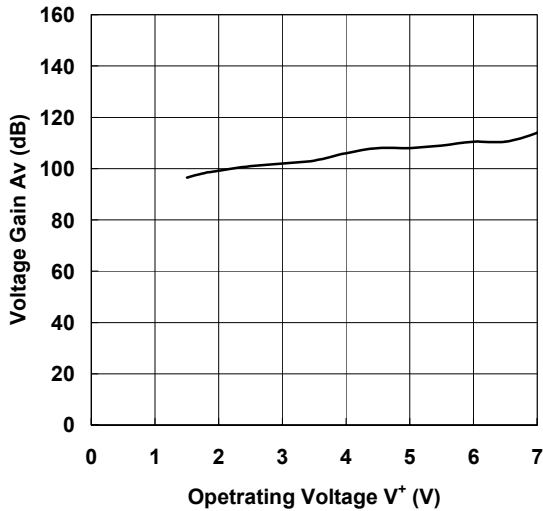


Voltage Gain/Phase vs. Frequency (Ta=25°C)

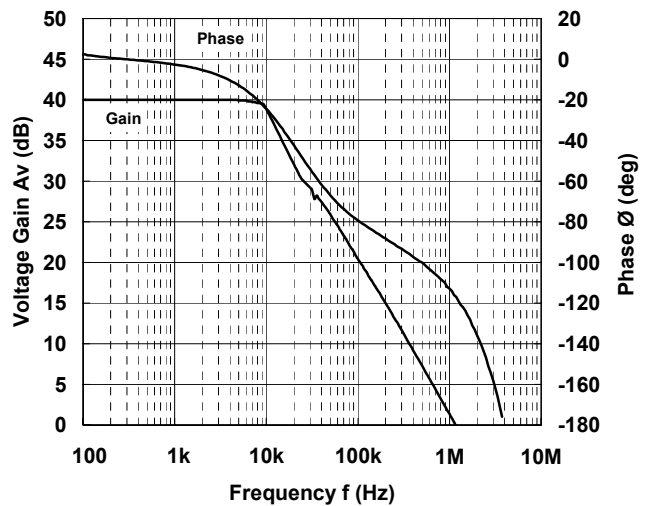


■ TYPICAL CHARACTERISTICS


Slew Rate (Rise)

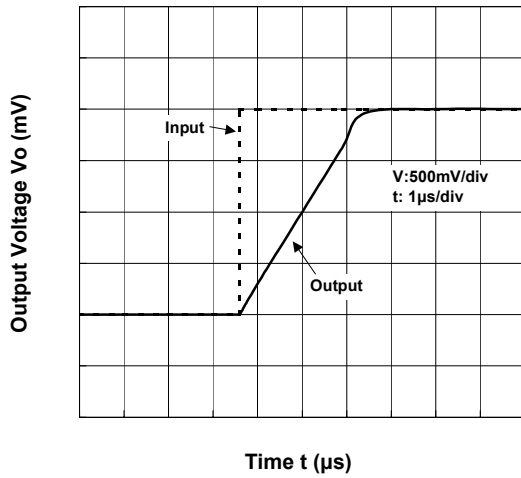


Slew Rate (Fall)

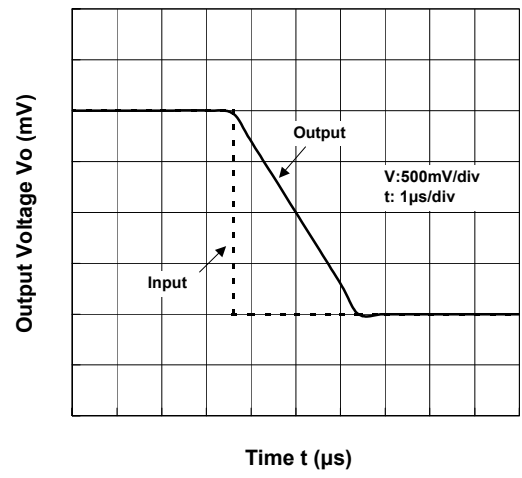


Operating Current vs. Ambient Temp.

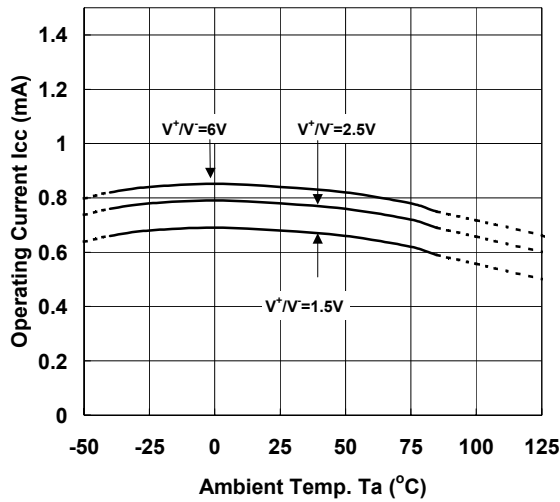


Input Offset Voltage vs. Ambient Temp.

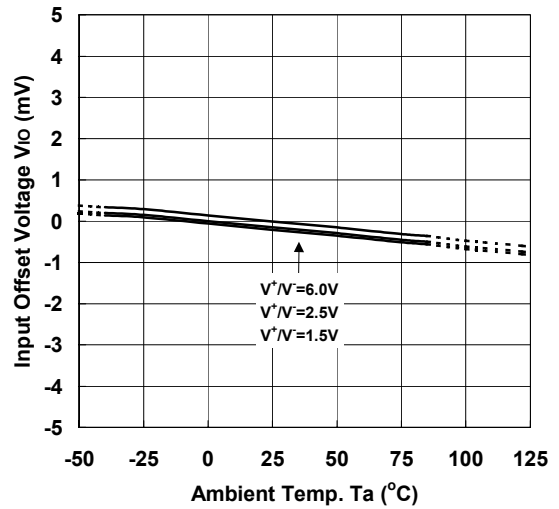

Input Bias Current vs. Ambient Temp.

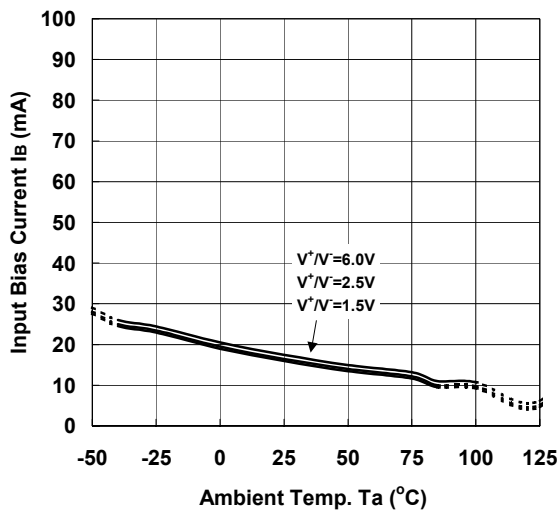


Maximum Output Voltage vs. Ambient Temp.

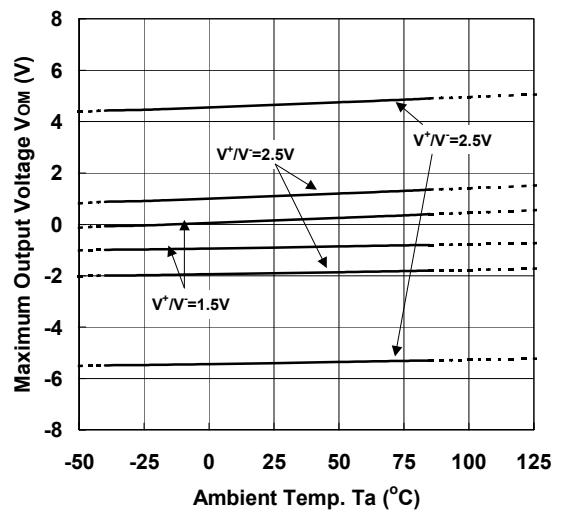


## TYPICAL CHARACTERISTICS


Output Sink Current vs. Ambient Temp.

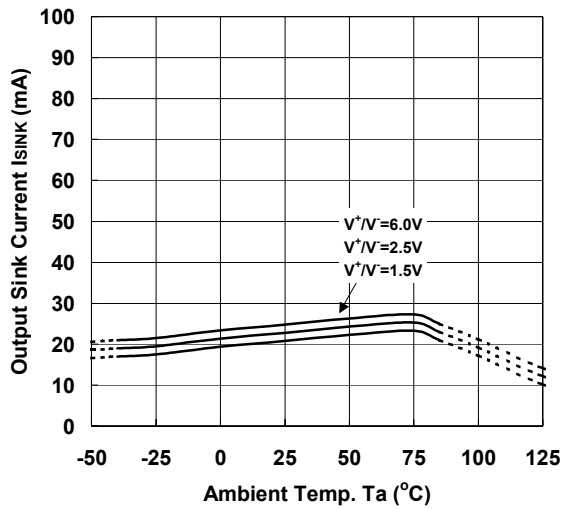


Output Source Current vs. Ambient Temp.

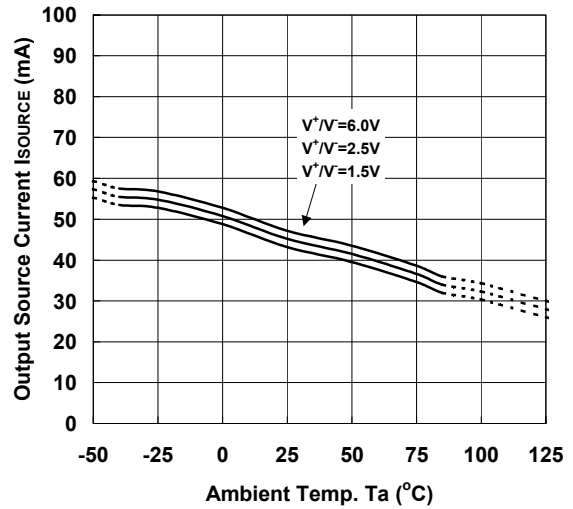


Voltage Gain vs. Ambient Temp.

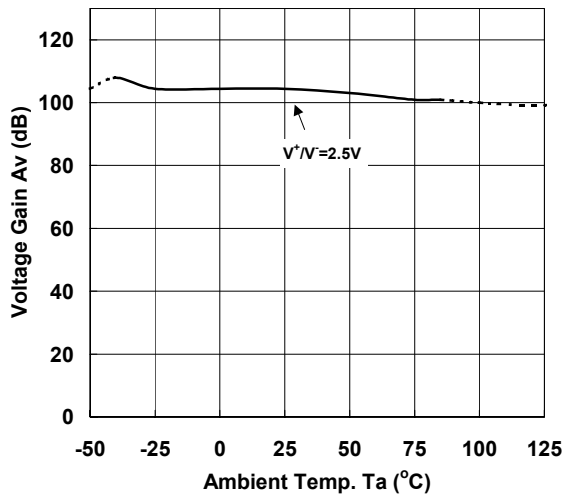

Common Mode Rejection Ratio vs. Ambient Temp.

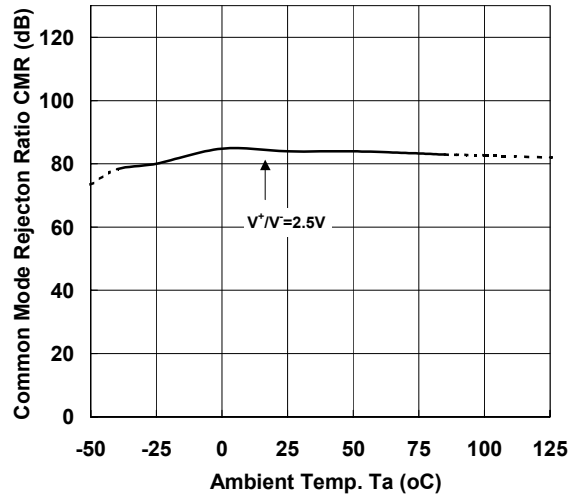

Supply Voltage Rejection Ratio vs. Ambient Temp.

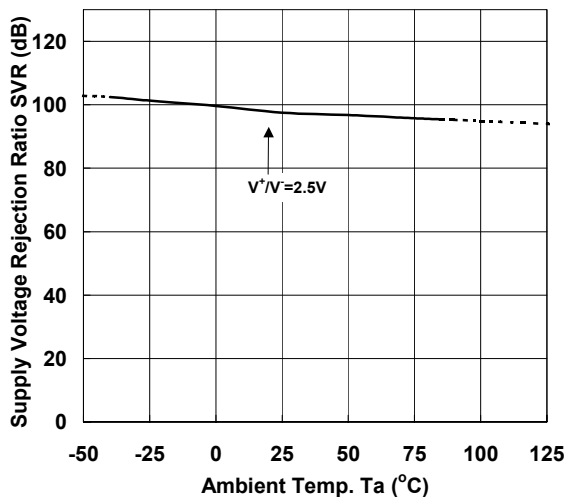

[CAUTION]  
The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.