


# L 699 034 P.C.B. connectors

► Expert Range - Crimp connection



Male plug.  
Open plug.  
Wires parallel to connection.



Plug  
**TILE SHAPE**

Body : UL94 V0 - PA  
Grey □

## Spacing 5.08 mm .200"

### Ordering details

N. Poles	Weight kg	Packaging	L. mm	Order code
2	0.0009	100	10.16	1SSA 699 034 R0200
3	0.0013	100	15.24	1SSA 699 034 R0300
4	0.0018	100	20.32	1SSA 699 034 R0400
5	0.0022	50	25.40	1SSA 699 034 R0500
6	0.0026	50	30.48	1SSA 699 034 R0600
7	0.0031	50	35.56	1SSA 699 034 R0700
8	0.0035	50	40.64	1SSA 699 034 R0800
9	0.0039	50	45.72	1SSA 699 034 R0900
10	0.0044	50	50.80	1SSA 699 034 R1000
11	0.0048	50	55.88	1SSA 699 034 R1100
12	0.0053	50	60.96	1SSA 699 034 R1200

Other numbers of poles, consult us



### Technical data

	IEC	UL	CSA
Wire size			
*	0.5 - 1 mm <sup>2</sup>		
**	1.5 - 2.5 mm <sup>2</sup>		
Rated voltage	250 V		
Rated current		10 A	
		12 A	
Storage temperature range		-20 ~ +80 °C	
Insulation resistance		≥ 10 <sup>9</sup> Ω	
Protection			

### Crimp contacts

For crimping tools, consult us


*	Male contacts	bulk	0.2 to 1 mm <sup>2</sup>	1SSA 699 039 R0100
*		strip	0.5 to 1 mm <sup>2</sup>	1SSB 699 039 R0000
**	Male contacts	bulk	1.5 to 2.5 mm <sup>2</sup>	1SSA 699 040 R0100
**		strip	1.5 to 2.5 mm <sup>2</sup>	1SSB 699 040 R0000

### Accessories


Rep.	Description	Type	Order code	Packaging	Weight kg	
1	Cable clamp plug	3 to 7 poles	PT1	1SSA 299 226 R0100	50	0.0012
2	Cable clamp plug	8 to 16 poles	PT2	1SSA 299 227 R0100	50	0.0033
3	Snap in mounting foot	grey □		1SSA 299 257 R0000	20	0.0001
4	Coding peg	COPE	1SNA 199 322 R2200	10	0.0010	

### Other versions, please consult us :


Male plug, wires parallel to connection with brackets.




L 699 036




Male plug, wires parallel to connection with flanges with inserts (axis spacing 5.08 mm).



L 699 037

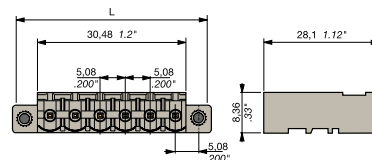

Male plug, wires parallel to connection with flanges without inserts (axis spacing 6.3 mm).



L 699 048

