



STYLE DM20



DM20

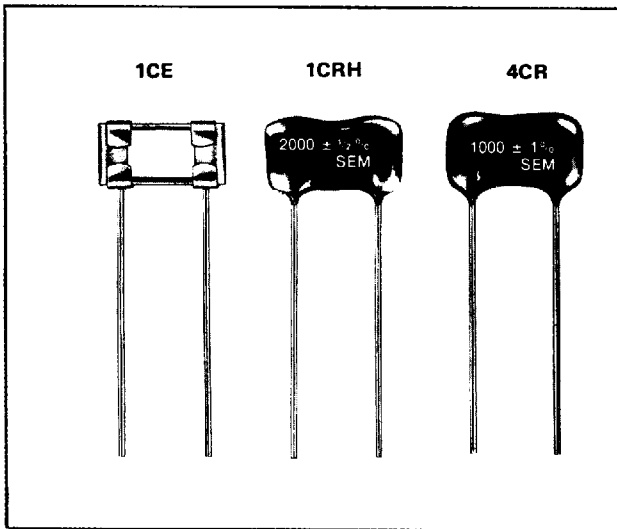

1CRH, 4CR

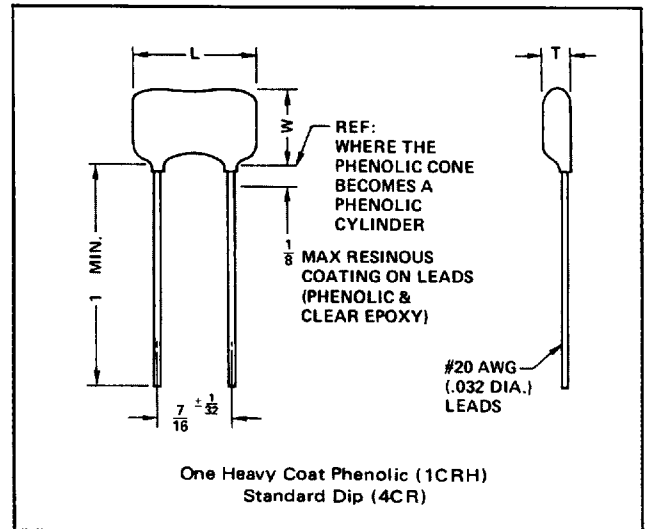

DIMENSIONS FOR CAPACITANCE VALUES

1CRH

CAPACITANCE VALUE IN pF	500 WV			300 WV			100 WV		
	L	W	T	L	W	T	L	W	T
	MAXIMUM			MAXIMUM			MAXIMUM		
1 - 100	.700	.450	.120	*	*	*	*	*	*
200 - 620	.700	.450	.130	*	*	*	*	*	*
750 - 1200	.700	.450	.140	*	*	*	*	*	*
1300 - 1600	.700	.460	.150	*	*	*	*	*	*
1800	.710	.460	.150	*	*	*	*	*	*
2000 - 2200	.710	.460	.160	*	*	*	*	*	*
2400 - 2700	.710	.460	.200	*	*	*	*	*	*
3000 - 3300	.720	.470	.220	*	*	*	*	*	*
3600	.720	.470	.230	*	*	*	*	*	*
3900	.720	.480	.240	*	*	*	*	*	*
4300	.720	.480	.250	.720	.470	.210	*	*	*
4700	.730	.480	.260	.720	.470	.220	*	*	*
5100	.730	.490	.270	.720	.470	.230	*	*	*
5600	.730	.490	.280	.720	.480	.240	*	*	*
6200	.740	.490	.300	.720	.480	.250	.720	.470	.220
6800	.740	.500	.320	.730	.480	.260	.720	.470	.230
7500	.750	.500	.340	.730	.490	.270	.720	.480	.240
8200	.750	.510	.360	.730	.490	.280	.720	.480	.250
9100	.760	.520	.380	.740	.490	.290	.730	.480	.260
10000	.760	.530	.400	.740	.490	.300	.730	.490	.270
11000				.740	.500	.320	.730	.490	.280
12000				.750	.500	.340	.740	.490	.290
12300				.750	.510	.360	.740	.490	.300
13000							.740	.500	.310
15000							.750	.500	.330
16000							.750	.510	.350
18000							.760	.520	.370

4CR

CAPACITANCE VALUE IN pF	500 WV			300 WV			100 WV		
	L	W	T	L	W	T	L	W	T
	MAXIMUM			MAXIMUM			MAXIMUM		
1 - 100	.750	.500	.180	*	*	*	*	*	*
200 - 620	.750	.500	.190	*	*	*	*	*	*
750 - 1200	.750	.510	.200	*	*	*	*	*	*
1300 - 1600	.750	.510	.210	*	*	*	*	*	*
1800 - 2200	.760	.520	.220	*	*	*	*	*	*
2400	.770	.530	.250	*	*	*	*	*	*
2700	.770	.540	.260	*	*	*	*	*	*
3000	.770	.540	.270	*	*	*	*	*	*
3300	.780	.550	.280	*	*	*	*	*	*
3600	.780	.550	.290	*	*	*	*	*	*
3900	.780	.560	.300	*	*	*	*	*	*
4300	.780	.560	.310	.770	.540	.270	*	*	*
4700	.790	.560	.320	.770	.540	.270	*	*	*
5100	.790	.570	.330	.780	.550	.280	*	*	*
5600	.790	.570	.340	.780	.550	.290	*	*	*
6200	.790	.580	.350	.780	.560	.300	.780	.550	.290
6800	.800	.590	.370	.790	.560	.320	.780	.560	.300
7500	.800	.600	.390	.790	.570	.330	.780	.560	.300
8200	.810	.610	.410	.790	.570	.340	.780	.560	.310
9100	.810	.620	.430	.800	.580	.360	.790	.570	.330
10000	.820	.630	.450	.800	.590	.370	.790	.570	.340
11000				.800	.590	.380	.790	.580	.350
12000 - 12300				.810	.600	.400	.800	.580	.360
13000							.800	.590	.380
15000							.810	.600	.400
16000							.810	.610	.410
18000							.820	.620	.440


*NOTE: Where dimensions are not given for a particular capacitance value, use dimensions for next greater voltage rating.

STYLE DM20

VOLTAGE and CAPACITANCE RANGES

WORKING VOLTAGE	CHARACTERISTIC	CAPACITANCE RANGE
100VDC	C	1pF - 18000pF
	D,E	180pF - 18000pF
	F	430pF - 18000pF
300VDC	C	1pF - 12300pF
	D,E	180pF - 12300pF
	F	430pF - 12300pF
500VDC	C	1pF - 10000pF
	D,E	180pF - 10000pF
	F	430pF - 10000pF
1000VDC	C	1pF - 5600pF
	D,E	180pF - 5600pF
	F	430pF - 5600pF
1500VDC	C	1pF - 2900pF
	D,E	180pF - 2900pF
	F	430pF - 2900pF
2000VDC	C	1pF - 1600pF
	D,E	180pF - 1600pF
	F	430pF - 1600pF
2500VDC	C	1pF - 750pF
	D,E	180pF - 750pF
	F	430pF - 750pF

TYPICAL TEMPERATURE COEFFICIENT RANGE FOR DM20 DIPPED MICA CAPACITORS

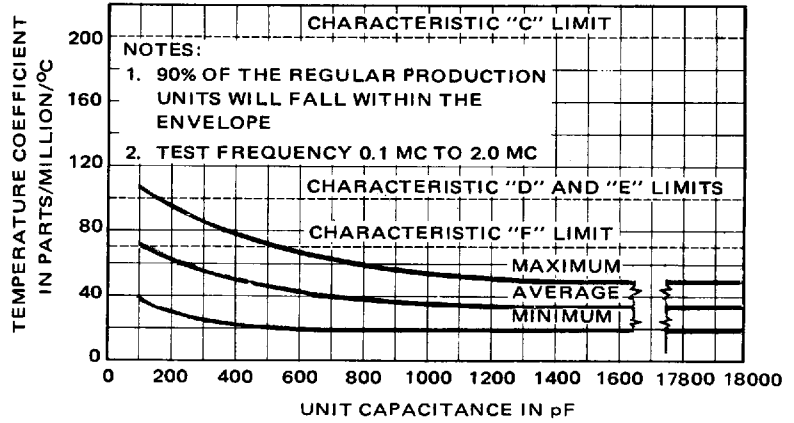

DIMENSIONS FOR CAPACITANCE VALUES (HIGHER VOLTAGES)

4CR				4CR				4CR				4CR			
CAPACITANCE VALUE IN pF	2500 WV			CAPACITANCE VALUE IN pF	2000 WV			CAPACITANCE VALUE IN pF	1500 WV			CAPACITANCE VALUE IN pF	1000 WV		
	L	W	T		L	W	T		L	W	T		L	W	T
	MAXIMUM				MAXIMUM				MAXIMUM				MAXIMUM		
1 - 10	.750	.500	.180	1 - 30	.750	.500	.180	1 - 91	.750	.500	.190	1 - 200	.750	.500	.190
12 - 36	.750	.500	.190	43 - 91	.750	.500	.190	100 - 180	.750	.510	.200	220 - 430	.750	.510	.200
39 - 82	.750	.510	.200	100 - 150	.750	.510	.200	200 - 270	.750	.510	.210	510	.750	.510	.210
68 - 82	.750	.510	.210	160 - 200	.760	.510	.210	300	.750	.520	.210	620	.760	.510	.210
91 - 110	.760	.520	.220	220 - 270	.760	.520	.220	330 - 390	.760	.520	.220	750 - 910	.760	.520	.220
120 - 130	.760	.520	.230	300 - 330	.760	.520	.230	430 - 510	.760	.520	.230	1000 - 1100	.760	.520	.230
150 - 160	.760	.520	.240	360 - 390	.760	.520	.240	560 - 620	.760	.520	.240	1200 - 1300	.760	.520	.240
180 - 200	.770	.530	.250	430	.770	.530	.250	680 - 750	.770	.530	.250	1500 - 1600	.770	.530	.250
220	.770	.540	.260	470	.770	.540	.260	820	.770	.540	.260	1800	.770	.540	.260
240	.770	.540	.270	510	.770	.540	.270	910	.770	.540	.270	2000	.770	.540	.270
270	.780	.550	.280	560	.780	.550	.280	1000	.780	.550	.280	2200	.780	.550	.280
300	.780	.550	.290	620	.780	.550	.290	1100	.780	.550	.290	2400	.780	.550	.290
330	.780	.560	.300	680	.780	.560	.300	1200	.780	.560	.300	2700	.780	.560	.300
360	.780	.560	.310	750	.780	.560	.310	1300	.780	.560	.310	3000	.780	.560	.310
390	.790	.560	.320	820	.790	.560	.320	1500	.790	.570	.320	3300	.790	.570	.320
430	.790	.570	.330	910	.790	.570	.330	1600	.790	.570	.330	3600	.790	.570	.330
470	.790	.580	.350	1000	.790	.570	.340	1800	.790	.580	.350	3900	.790	.580	.340
510	.800	.590	.370	1100	.790	.580	.350	2000	.800	.590	.370	4300	.800	.590	.360
560	.800	.600	.390	1200	.800	.590	.370	2200	.800	.600	.390	4700	.800	.600	.380
620	.810	.610	.410	1300	.800	.600	.390	2400	.810	.610	.410	5100	.810	.610	.400
680	.810	.620	.430	1500	.810	.610	.420	2700	.810	.620	.430	5600	.810	.620	.420
750	.820	.630	.450	1600	.820	.620	.440	2900	.820	.630	.450				

Maximum dimension for 1CE capacitors are available on request.