

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0190030105](#)
Status: **Active**
Overview: [Standard Quick-Disconnect Terminals](#)
Description: [InsulKrimp Fully Insulated Female Coupler for 18-22 Wire Range](#)

Documents:
[3D Model](#) [Product Specification PS-19902-011-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-19902-008-001 \(PDF\)](#)

Agency Certification

CSA LR18689
UL E79133

General

Product Family Quick Disconnects
Series [19003](#)
Comments Funnel Entry
Crimp Quality Equipment Yes
Insulated Fully
Overview [Standard Quick-Disconnect Terminals](#)
Product Name InsulKrimp
Type Quick Disconnect
UPC 800753128934

Physical

Barrel Type Closed
Color - Resin Red
Flammability 94V-2
Gender Female
Glow-Wire Capable Yes
Insulation Nylon (PA)
Lock to Mating Part None
Material - Metal Brass
Material - Plating Mating Tin
Material - Plating Termination Tin
Material - Resin Nylon
Net Weight 1.000/g
Orientation Straight
Packaging Type Reel
Plating min - Mating 4.064µm
Plating min - Termination 4.064µm
Polarized to Mating Part No
Tab Thickness 0.81mm
Tab Width 6.35mm
Temperature Range - Operating -65° to +105°C
Termination Interface: Style Crimp or Compression
Wire Insulation Diameter 3.43mm max.
Wire Size AWG 18, 20, 22

Electrical


Voltage - Maximum 600V

Solder Process Data

Lead-freeProcess Capability N/A

Material Info

Engineering Number AA-2201C

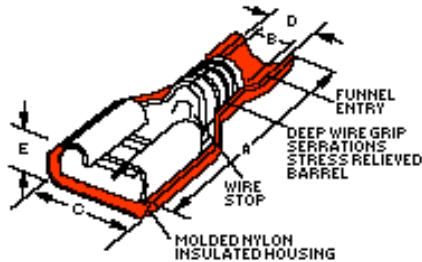

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS Green Image
ELV Compliant
RoHS Phthalates Not Contained

Search Parts in this Series
[19003 Series](#)

Reference - Drawing Numbers

Product Specification
Sales Drawing

PS-19902-008-001, PS-19902-011-001
SD-19003-005

This document was generated on 10/03/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION